
USB-C PD input




CH224A: VHV (pin 1) and VBUS (pin 8) tied straight to VBUS. CFG2/CFG3 open.
6.8k on CFG1 requests 9 V; a 5 V–only source still works (5 V rail then ~4.8 V).

3V3 housekeeping

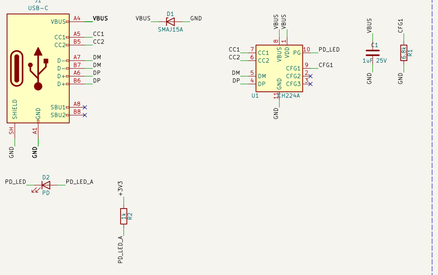


INA301 RESET high = latch mode. R3/C4 keep it low for ~10 ms after power-up (transparent), so start-up inrush can't latch a fault. SW1 re-arms both rails.

Rail L (left side)

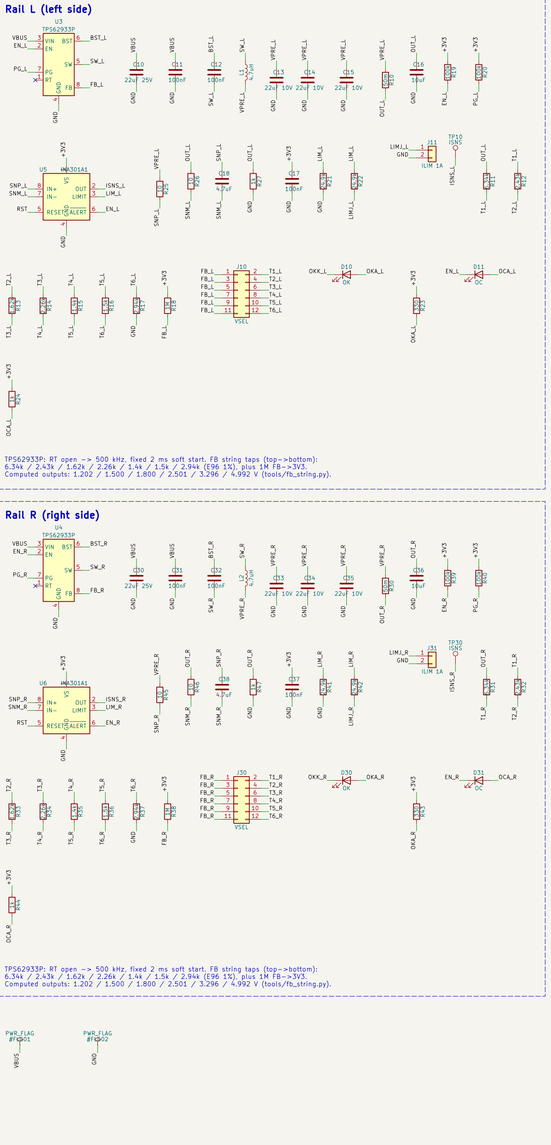

TPS62933P: RT open -> 500 kHz, fixed 2 ms soft start. FB string taps (top->bottom):
6.34k / 2.43k / 1.62k / 2.26k / 1.4k / 1.5k / 2.94k (E96 1%), plus 1M FB->3V3.
Computed outputs: 1.202 / 1.500 / 1.800 / 2.501 / 3.296 / 4.992 V (tools/fb_string.py).

Outputs



Rail pins: two 2-pin headers per side, in holes 1 and 5 of a rail group (10.16 mm apart), for MB102-style breadboards (inner rail 0.825" / outer rail 0.925" from centre). Order GND, + on both sides.

Rail R (right side)

TPS62933P: RT open -> 500 kHz, fixed 2 ms soft start. FB string taps (top->bottom):
6.34k / 2.43k / 1.62k / 2.26k / 1.4k / 1.5k / 2.94k (E96 1%), plus 1M FB->3V3.
Computed outputs: 1.202 / 1.500 / 1.800 / 2.501 / 3.296 / 4.992 V (tools/fb_string.py).

Rail pins: 2×2 pins per side, in rail holes 1 and 5; GND, + on both sides
INA301 latching overcurrent per rail (1 A, or 2 A with ILIM jumper removed)
USB-C PD (CH224A, 9 V request) -> 2x TPS62933P, jumper-selected 1.2/1.5/1.8/2.5/3.3/5.0 V

Sheet: /	
File: mypsu.kicad_sch	
Title: MultiVolt PSU — USB-C PD breadboard supply	
Size: A1	Date: 2026-11-12 — **Rev: 1.1**
KiCad E.D.A. 10.0.7	Id: 1/1