


USB-C, ESD, fuse, Schottky, VBUS bleed

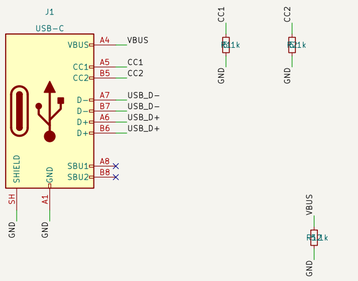


3.3 V LDO (1 A)

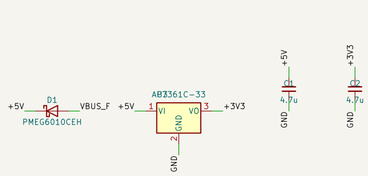


Power LED




CP2102N USB-UART (QFN-24)

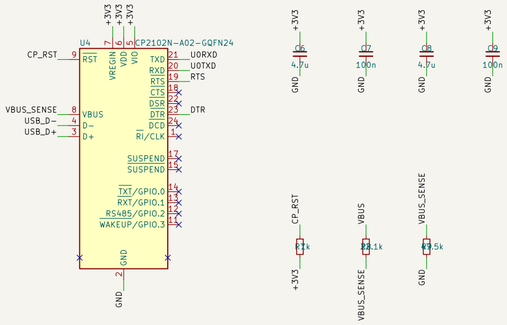


ESP32-WROOM-32E

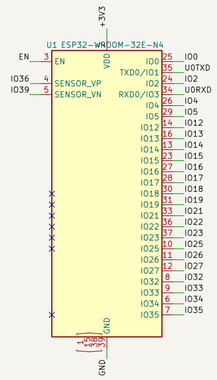


3V3 decoupling, EN delay, buttons (Espressif)

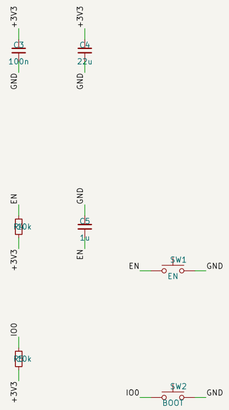


Auto-reset: RTS -> EN, DTR -> IO0 (esptool)




User LED (IO4)



Headers J2, J3 (DevKitC V4 pinout)



Power nets



EoS ESP32 DevKit, rev A. Designed by Kartikeydheer Srivastava.
Copyright (c) 2026 Kartikeydheer Srivastava. All rights reserved; see LICENSE.txt.
Values from Espressif's ESP32-WROOM-32E datasheet v2.1 (sections 6 and 9) and ESP32 Hardware Design Guidelines, the esptool docs (automatic bootloader), Silicon Labs CP2102N Rev. 1.5, Diodes AP7361C DS37274, onsemi MMBT3904, Nexperia PMEG6010CEH, ST USBLC6-2, Littelfuse 1206L, Kingbright.
U1: KiCad's ESP32-WROOM-32E symbol; its stacked GND pin [1,15,38,39] is expanded to the four pads.
R12 (5.1 kohm) bleeds D1's reverse leakage off VBUS, so a 5V-pin supply does not fake a USB host.
GPIO6–11 are the module's internal flash pins and are not led out: J2 16–18, J3 17–19 are NC.
Header grid and pinout from Espressif's DevKitC V4 user guide (positions and names only).

Header grid (two 1x19 rows 25.40 mm apart, 2.54 mm pitch, right row 1.30 mm from the right edge, Generated by tools/eos_boards from the board's design file
Copyright (c) 2026 Kartikeydheer Srivastava. Licence: All rights reserved
Kartikeydheer Srivastava

Sheet: /		
File: eos-esp32-devkit.kicad_sch		
Title: EoS ESP32 DevKit		
Size: A2	Date: 2026-10-12	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 1/1