

Independent technical study — companion report to the MATLAB, Simulink and Python models

## **Cascade Speed and Current Control of a Separately-Excited DC Machine**

Thyristor-rectifier drive: modelling, analytical controller synthesis and simulation

---

Electrical drives and power electronics

### **A 220 V / 3000 rpm DC drive: six-pulse controlled rectifier, averaged converter model and nested PI/PID loops**

---

#### **Author**

Khalil Ellah LAGHA  
M1 Electrical Engineering (EEA/EECS)  
Université Grenoble Alpes

#### **Software**

MATLAB / Simulink R2024a  
Simscape Electrical  
Python 3.12 (NumPy, SciPy)

July 2026

## Abstract

This report presents the complete design and simulation of a cascade speed and current controller for a separately-excited DC machine supplied by a three-phase, six-pulse thyristor rectifier. Each element of the drive is developed in detail: the operation of the controlled bridge and the synthesis of its firing angle, the average-value converter model used for control design, the armature-voltage to speed transfer function and its block-diagram realisation, and the analytical tuning of the current and speed controllers by pole-zero cancellation combined with a settling-time criterion.

A key element of the drive is the firing-angle generator, which applies an inverse-cosine law  $\alpha = \arccos(2U_{cm}/U_h - 1)$  to the controller output. Substituting this law into the cosine characteristic of the bridge cancels the nonlinearity exactly, so that the mean output voltage becomes proportional to the control signal. The converter can then be represented by a static gain of 22 V per control unit in series with a transport lag of 1.667 ms, which is one half of the 3.33 ms interval between successive firings. On this linear plant the current PID and the speed PI are tuned in closed form, giving response times of 0.1 s and 1 s respectively, a deliberate ratio of ten that justifies designing the two loops independently.

The design is verified twice. An independent Python implementation reproduces every design quantity to the printed precision and is used to quantify how the closed-loop response depends on the design targets, confirming that the response-time target sets the rise time of the first-order current loop, that the damping ratio sets the overshoot of the second-order speed loop and that the natural frequency sets its settling time. A hierarchy of three Simulink models, ending with a full physical model containing the switching thyristor bridge, then confirms that the controllers designed on the averaged model still behave correctly in the presence of the 300 Hz ripple, the firing dead time and the discrete nature of thyristor conduction.

**Keywords:** DC machine, cascade control, current limiting, six-pulse thyristor rectifier, firing angle, average-value model, pole-zero cancellation, PID tuning, Simscape Electrical.

# Contents

|                                                                    |           |
|--------------------------------------------------------------------|-----------|
| <b>Nomenclature</b>                                                | <b>iv</b> |
| <b>1 Introduction and system overview</b>                          | <b>1</b>  |
| 1.1 Why a DC drive is still worth studying                         | 1         |
| 1.2 The separately-excited DC machine                              | 1         |
| 1.3 Cascade control architecture                                   | 1         |
| <b>2 The controlled rectifier and its model</b>                    | <b>2</b>  |
| 2.1 The six-pulse bridge                                           | 2         |
| 2.2 Mean output voltage and the nonlinearity it introduces         | 3         |
| 2.3 The firing-angle generator: a linearising control law          | 3         |
| 2.4 The average-value model, and why a transfer function           | 4         |
| <b>3 Plant transfer function and its block-diagram realisation</b> | <b>4</b>  |
| 3.1 Derivation                                                     | 5         |
| 3.2 The block-diagram model of the machine                         | 5         |
| 3.3 Fixing the operating point                                     | 5         |
| <b>4 Controller design</b>                                         | <b>6</b>  |
| 4.1 Inner current loop                                             | 6         |
| 4.2 Outer speed loop                                               | 7         |
| 4.3 Units, scaling and limiting                                    | 7         |
| 4.4 An alternative tuning for constant load torque                 | 7         |
| <b>5 Python verification and parametric study</b>                  | <b>8</b>  |
| 5.1 Cross-check of the design quantities                           | 8         |
| 5.2 First order: the response time sets the rise time              | 9         |
| 5.3 Second order: the damping ratio sets the overshoot             | 9         |
| 5.4 Second order: the natural frequency sets the settling time     | 10        |
| <b>6 Simulink models and results</b>                               | <b>11</b> |
| 6.1 Transfer-function block diagram                                | 11        |
| 6.2 Intermediate model with a physical machine                     | 12        |
| 6.3 Full physical model with the switching thyristor bridge        | 12        |
| <b>7 Discussion and limitations</b>                                | <b>13</b> |
| <b>8 Conclusion</b>                                                | <b>14</b> |
| <b>A Summary of the design computations</b>                        | <b>14</b> |
| <b>B Organisation of the accompanying models</b>                   | <b>15</b> |

## List of Figures

|   |                                                                                                                                                                                                                           |    |
|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| 1 | The firing-angle generator subsystem. It computes $\alpha = \arccos(2U_{cm}/U_h - 1)$ , the inverse-cosine law that linearises the thyristor bridge. . . . .                                                              | 3  |
| 2 | The <i>DC machine</i> subsystem: the armature admittance $1/((L_a+L_f)s + R_a)$ produces the current, $k\Phi$ converts it to torque, $1/(Js)$ integrates to speed, and $k\Phi\omega$ is fed back as the back-EMF. . . . . | 5  |
| 3 | Step responses at the designed operating point: inner current loop (left) and outer speed loop (right), showing the deliberate ten-to-one time-scale separation. . . . .                                                  | 8  |
| 4 | First-order current loop: the response-time target sets the rise time, with no overshoot at any setting. . . . .                                                                                                          | 9  |
| 5 | Second-order speed loop: the damping ratio sets the overshoot and the oscillation, at fixed $\omega_n = 5$ rad/s. . . . .                                                                                                 | 10 |
| 6 | Second-order speed loop: the natural frequency sets the settling time, at fixed $\zeta = 0.7$ . . . . .                                                                                                                   | 11 |
| 7 | Transfer-function cascade block diagram: the idealised design model, matching Sections 2 to 4 one-to-one. . . . .                                                                                                         | 11 |
| 8 | Intermediate physical model: the genuine Simscape <i>DC Machine</i> block driven by an averaged controlled voltage source. . . . .                                                                                        | 12 |
| 9 | Full physical model: three-phase source, six-pulse thyristor bridge, firing-angle generator and synchronised pulse generator, smoothing inductor and DC machine. . . . .                                                  | 13 |

## List of Tables

|   |                                                                                                       |    |
|---|-------------------------------------------------------------------------------------------------------|----|
| 2 | Parameters of the studied DC machine, confirmed against the Simscape <i>DC Machine</i> block. . . . . | 2  |
| 3 | Analytically tuned controller gains. . . . .                                                          | 7  |
| 4 | Design quantities: MATLAB versus the independent Python implementation. . . . .                       | 8  |
| 5 | First-order current loop: rise time versus the response-time target. . . . .                          | 9  |
| 6 | Second-order speed loop: overshoot versus damping ratio. . . . .                                      | 10 |
| 7 | Second-order speed loop: settling time versus natural frequency. . . . .                              | 10 |
| 8 | Design chain, in computation order. . . . .                                                           | 15 |
| 9 | Organisation of the accompanying code and models. . . . .                                             | 15 |

## Nomenclature

|                    |                                                       |                   |
|--------------------|-------------------------------------------------------|-------------------|
| $u_a, i_a$         | Armature voltage and current                          | V, A              |
| $R_a, L_a$         | Armature resistance and inductance                    | $\Omega$ , H      |
| $L_f$              | Series smoothing inductance                           | H                 |
| $k\Phi$            | Torque and back-EMF constant                          | V·s/rad           |
| $\omega$           | Rotor angular speed                                   | rad/s             |
| $J$                | Rotor inertia                                         | kg·m <sup>2</sup> |
| $f_r$              | Viscous friction coefficient                          | N·m·s             |
| $K_r$              | Viscous load coefficient                              | N·m·s             |
| $C_r$              | Load torque                                           | N·m               |
| $\alpha$           | Thyristor firing angle                                | ° or rad          |
| $U_{LL}$           | Line-to-line supply voltage (RMS)                     | V                 |
| $V_d, V_{d0}$      | Mean rectified voltage, and its value at $\alpha = 0$ | V                 |
| $U_{cm}$           | Current-controller output (control signal)            | –                 |
| $U_h$              | Firing-law reference amplitude                        | –                 |
| $K_c, T_c$         | Converter static gain and transport lag               | V/unit, s         |
| $b$                | Current-loop plant gain, $K_c/R_a$                    | A/unit            |
| $\tau_e, \tau_m$   | Electrical and mechanical time constants              | s                 |
| $t_{r,i}, t_{r,w}$ | Target response times, current and speed loops        | s                 |
| $K_p, K_i, K_d$    | Controller gains                                      | –                 |
| $\zeta, \omega_n$  | Damping ratio and natural frequency                   | –, rad/s          |

## 1 Introduction and system overview

### 1.1 Why a DC drive is still worth studying

Variable-speed DC drives have largely been displaced by AC drives in new installations, but they remain widespread in existing industrial plant and they retain a strong pedagogical value. The reason is structural: in a separately excited DC machine with constant field, the flux and the armature current are carried by two physically distinct circuits, so the torque is proportional to the armature current with no coupling to compensate and no coordinate transformation to perform. The machine is linear, and every step of the control design can be carried out analytically and checked by hand. The concepts that emerge — nested loops, time-scale separation, current limiting, pole-zero cancellation, the average-value model of a converter — transfer directly to AC drives, where they are harder to see because they are entangled with the vector-control machinery.

This study takes a complete drive, from the mains to the shaft, and develops each of its parts: the controlled rectifier and its firing-angle generator, the averaged converter model, the plant transfer function, and the two nested controllers. The operating point studied throughout is an armature voltage of 220 V producing a speed of 3000 rpm.

### 1.2 The separately-excited DC machine

The plant is a separately excited DC machine whose speed is regulated through its armature voltage  $u_a$ , the field excitation being held constant so that the flux term  $k\Phi$  is a constant. Under this condition the machine is linear and is described by an electrical balance on the armature circuit and a mechanical balance on the rotor:

$$u_a(t) = R_a i_a(t) + (L_a + L_f) \frac{di_a}{dt} + k\Phi \omega(t), \quad (1)$$

$$J \frac{d\omega}{dt} = k\Phi i_a(t) - (f_r + K_r) \omega(t), \quad (2)$$

where  $k\Phi \omega$  is the back-EMF,  $k\Phi i_a$  the electromagnetic torque,  $f_r$  the mechanical friction and  $K_r$  a viscous load coefficient.

The inductance  $L_f$  deserves a comment because it dominates the electrical dynamics. It is not a machine parameter but a smoothing inductor deliberately placed in series with the armature to reduce the current ripple produced by the rectifier. Its value of 276 mH is more than twenty-five times the armature inductance itself, so the electrical time constant of the drive is essentially set by a component that the designer chooses rather than by the machine. This is a recurring feature of thyristor drives: the filter is part of the plant.

Eliminating the current between the two balances gives the armature-voltage to speed transfer function that underpins the whole study:

$$G(s) = \frac{\Omega(s)}{U_a(s)} = \frac{k\Phi}{(R_a + (L_a + L_f)s)(Js + f_r + K_r) + k\Phi^2}. \quad (3)$$

Its derivation and block-diagram realisation are given in Section 3.

### 1.3 Cascade control architecture

The controller uses the classical cascade structure with two nested loops. An inner current loop regulates the armature current  $i_a$  and is designed to be fast; its reference is produced

**Table 2.** Parameters of the studied DC machine, confirmed against the Simscape *DC Machine* block.

| Symbol  | Quantity                               | Value                 | Unit              |
|---------|----------------------------------------|-----------------------|-------------------|
| $R_a$   | armature resistance                    | 2.33                  | $\Omega$          |
| $L_a$   | armature inductance                    | 10.6                  | mH                |
| $L_f$   | series smoothing inductance            | 276                   | mH                |
| $k\Phi$ | torque / back-EMF constant             | 0.57                  | V·s/rad           |
| $J$     | rotor inertia                          | $7.5 \times 10^{-3}$  | kg·m <sup>2</sup> |
| $f_r$   | viscous friction                       | $1.75 \times 10^{-4}$ | N·m·s             |
| $k$     | equivalent speed-loop scaling (design) | $1.25 \times 10^{-2}$ | –                 |

by an outer speed loop, designed to be comparatively slow. A saturation block placed on the current reference provides natural current limiting during large transients such as start-up and load steps, which protects both the machine and the thyristors.

The design deliberately enforces a time-scale separation: the current loop is tuned to respond about ten times faster than the speed loop, with target response times of 0.1 s and 1 s respectively. Because the inner loop settles long before the outer loop reacts, the speed controller effectively sees the current loop as an ideal, instantaneous torque actuator, and the two loops can be designed independently. This is the assumption on which Section 4 rests, and it is the reason the ratio of ten is a design constraint rather than a convenience.

The complete signal chain is therefore

$$\omega_{\text{ref}} \rightarrow \boxed{\text{Speed PI}} \rightarrow i_{a,\text{ref}} \rightarrow \boxed{\text{Current PID}} \rightarrow U_{cm} \rightarrow \boxed{\text{Rectifier}} \rightarrow u_a \rightarrow \boxed{\text{DC machine}} \rightarrow \omega, \quad (4)$$

with  $i_a$  fed back to the inner summing junction and  $\omega$  to the outer one.

## 2 The controlled rectifier and its model

The armature is supplied by a three-phase, six-pulse thyristor rectifier, that is, a fully controlled Graetz bridge. This section explains how the bridge works, how its firing angle is generated, and how the whole converter is condensed into the single first-order transfer function used for control design.

### 2.1 The six-pulse bridge

The bridge is a Simscape *Universal Bridge* configured with three arms and six thyristors, fed by a three-phase source of line-to-line voltage  $U_{LL} = 220$  V RMS at 50 Hz. The six thyristors conduct in pairs, each for 120°, and there are six commutations per mains period. The rectified voltage therefore carries a ripple at

$$f_{\text{ripple}} = 6 \times 50 = 300 \text{ Hz}, \quad (5)$$

which the 276 mH smoothing inductor filters into a nearly constant armature current.

Unlike a diode, a thyristor conducts only after its gate has received a pulse, so conduction can be delayed by a controllable firing angle  $\alpha$  measured from the natural commutation instant. That delay is the control handle of the entire drive.

## 2.2 Mean output voltage and the nonlinearity it introduces

Averaging the six-pulse waveform over one  $60^\circ$  segment gives the classical result for the mean output of a fully controlled bridge:


$$V_d(\alpha) = \frac{3\sqrt{2}}{\pi} U_{LL} \cos \alpha = \frac{3\sqrt{6}}{\pi} V_\phi \cos \alpha \approx 1.35 U_{LL} \cos \alpha, \quad (6)$$

where  $V_\phi = U_{LL}/\sqrt{3}$  is the phase RMS voltage. With  $U_{LL} = 220$  V the no-delay maximum is

$$V_{d0} = 1.35 \times 220 \approx 297 \text{ V}, \quad V_d(\alpha) = 297 \cos \alpha. \quad (7)$$

Equation (6) shows that the converter is four-quadrant in voltage:  $\alpha < 90^\circ$  gives  $V_d > 0$  and the bridge rectifies,  $\alpha > 90^\circ$  gives  $V_d < 0$  and the bridge inverts, which allows regenerative braking, and  $\alpha = 90^\circ$  gives  $V_d = 0$ . It also shows the difficulty:  $V_d$  is a cosine of the control variable, so the converter gain  $dV_d/d\alpha = -V_{d0} \sin \alpha$  varies from zero at  $\alpha = 0$  to its maximum at  $\alpha = 90^\circ$ . A controller tuned for one operating point would be mistuned at another. This is what the firing-angle generator exists to fix.

## 2.3 The firing-angle generator: a linearising control law

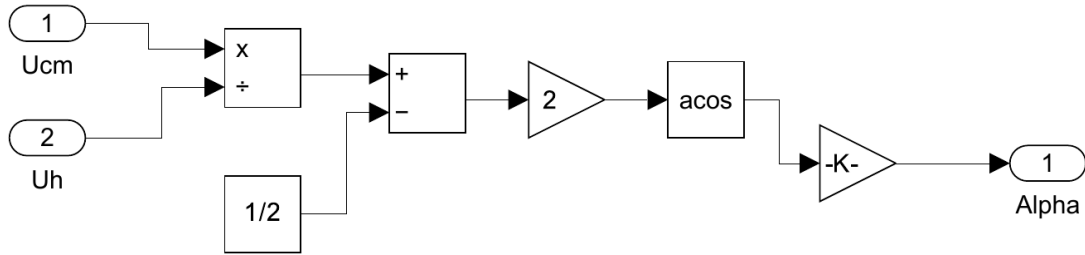

**Figure 1.** The firing-angle generator subsystem. It computes  $\alpha = \arccos(2U_{cm}/U_h - 1)$ , the inverse-cosine law that linearises the thyristor bridge.

The generator of Figure 1 converts the current controller's output  $U_{cm}$  into the firing angle in degrees supplied to the six-pulse pulse generator. Reading it from left to right, with  $U_h = 10$  as the reference amplitude:

$$\frac{U_{cm}}{U_h} \xrightarrow{\times 2, -1} \left( \frac{2U_{cm}}{U_h} - 1 \right) \xrightarrow{\arccos} \alpha_{\text{rad}} \xrightarrow{\times 180/\pi} \alpha_{\text{deg}}, \quad (8)$$

that is,

$$\boxed{\alpha = \arccos\left(\frac{2U_{cm}}{U_h} - 1\right)}. \quad (9)$$

The reason for the inverse cosine is that it cancels the cosine of the bridge exactly. Substituting (9) into (6),

$$V_d = V_{d0} \cos \alpha = V_{d0} \left( \frac{2U_{cm}}{U_h} - 1 \right), \quad (10)$$

so the mean output voltage becomes an affine function of the control signal. The mapping is  $U_{cm} = 0 \Rightarrow \alpha = 180^\circ \Rightarrow V_d = -V_{d0}$ ,  $U_{cm} = 5 \Rightarrow \alpha = 90^\circ \Rightarrow V_d = 0$ , and  $U_{cm} = 10 \Rightarrow \alpha = 0^\circ \Rightarrow V_d = +V_{d0}$ . The full four-quadrant voltage range is therefore available with a single, constant

converter gain. A synchronised six-pulse generator with  $60^\circ$  pulse width then places the gate pulses at that angle relative to the measured mains phase.

## 2.4 The average-value model, and why a transfer function

For control design the switching bridge cannot be used directly. It is nonlinear before linearisation and discrete in time, since it can only act at the six firing instants per period, whereas pole-zero placement and settling-time design require a linear, continuous plant. The standard remedy is the average-value model, which replaces the whole converter — bridge, firing law and pulse generator — by two effects.

**A static gain.** Thanks to the inverse-cosine law of Section 2.3, this gain is constant. In the idealised block-diagram model, the control range  $U_{cm} \in [0, 10]$  is scaled so that full control produces the rated armature voltage:

$$K_c = \frac{U_{a,\text{rated}}}{U_{cm,\text{max}}} = \frac{220}{10} = 22 \quad [\text{V per control unit}]. \quad (11)$$

**A small transport lag.** After the controller changes  $U_{cm}$ , the new firing angle can only take effect at the next thyristor firing. Firings occur every  $1/(6 \times 50) = 3.33$  ms, and a change arriving at a uniformly distributed instant within that interval waits on average half of it:

$$T_c = \frac{1}{2 \times 6 \times 50} = 1.667 \text{ ms}, \quad (12)$$

modelled as a first-order lag  $1/(T_c s + 1)$ .

Combining the two, the rectifier is represented by the single first-order block that appears in the Simulink block diagram:

$$\frac{U_a(s)}{U_{cm}(s)} = \frac{K_c}{T_c s + 1} = \frac{22}{T_c s + 1}. \quad (13)$$

The advantage of a transfer function is that it turns the converter into a linear element which can be folded into the loop transfer function, so that the current PID can be tuned in closed form (Section 4). The switching model is kept separately, in Section 6, in order to verify that the controllers designed on the averaged model still behave correctly once the real ripple, the dead time and the discrete firing are present. This is the same methodological choice as in any converter study: design on the average, verify on the switching model.

The static gain also fixes the plant gain of the current loop:

$$b = \frac{K_c}{R_a} = \frac{22}{2.33} = 9.442 \quad [\text{A per control unit}], \quad (14)$$

that is, control to voltage through  $\times 22$ , then voltage to current through  $\times 1/R_a$ .

## 3 Plant transfer function and its block-diagram realisation


### 3.1 Derivation

Taking Laplace transforms of the two balances of Section 1, with the load written as a viscous term  $C_r = K_r \omega$ :

$$U_a = (R_a + (L_a + L_f)s)I_a + k\Phi\Omega, \quad Js\Omega = k\Phi I_a - (f_r + K_r)\Omega. \quad (15)$$

Eliminating  $I_a$  returns (3). The denominator is second order, as expected for a system with one electrical and one mechanical energy store, and the term  $k\Phi^2$  is the contribution of the back-EMF, which acts as an internal negative feedback path and is what makes an unregulated DC machine self-stabilising.

### 3.2 The block-diagram model of the machine

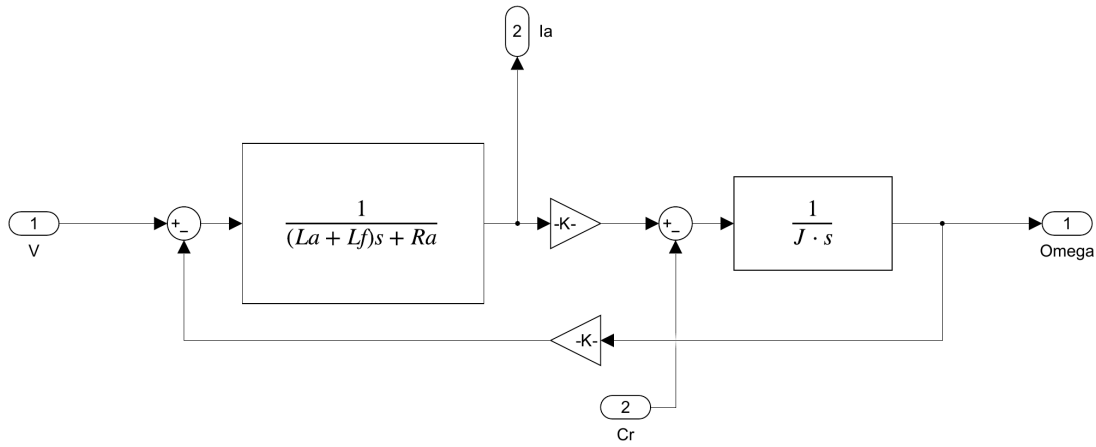

**Figure 2.** The DC machine subsystem: the armature admittance  $1/((L_a + L_f)s + R_a)$  produces the current,  $k\Phi$  converts it to torque,  $1/(Js)$  integrates to speed, and  $k\Phi\omega$  is fed back as the back-EMF.

The subsystem of Figure 2 realises (3) as an explicit block diagram rather than as a transfer-function block. This is not a cosmetic choice: it makes the internal current signal available for measurement, which is required by the inner loop, and it exposes the back-EMF path so that its role can be seen. Following the diagram, the armature voltage  $V$  has the back-EMF  $k\Phi\omega$  subtracted, drives the armature admittance to give the current  $I_a$ , which is scaled by  $k\Phi$  into torque; the load torque  $C_r$  is subtracted and the net torque is integrated by  $1/(Js)$  into the speed:

$$I_a = \frac{V - k\Phi\Omega}{(L_a + L_f)s + R_a}, \quad \Omega = \frac{k\Phi I_a - C_r}{Js}. \quad (16)$$

Substituting one into the other returns  $G(s)$  exactly, which confirms that the block diagram and the analytical model agree.

### 3.3 Fixing the operating point

The load is not a free parameter. Since the study fixes both the armature voltage and the resulting speed, the viscous load coefficient  $K_r$  must be back-computed so that the requested operating point is exactly the machine's steady state. Setting  $di_a/dt = d\omega/dt = 0$  in (1) and (2) and solving for  $K_r$ :

$$K_r = \frac{1}{R_a} \left( \frac{k\Phi U_a}{\omega^*} - k\Phi^2 \right) - f_r. \quad (17)$$

With  $U_a = 220$  V and  $\omega^* = 3000 \times 2\pi/60 = 314.16$  rad/s this gives  $K_r = 0.03170$ , a DC gain  $G(0) = 1.42800$  rad·s<sup>-1</sup>·V<sup>-1</sup> and hence  $\omega_{ss} = G(0) \times 220 = 3000.0$  rpm. The construction is self-consistent, which is a useful check that no unit conversion has been dropped.

Two characteristic time constants follow and are used in the tuning:

$$\tau_e = \frac{L_a + L_f}{R_a} = 0.1230 \text{ s}, \quad \tau_m = \frac{JR_a}{k\Phi^2} = 0.0538 \text{ s}. \quad (18)$$

It is worth pausing on their relative magnitude. In most small DC machines the electrical time constant is far shorter than the mechanical one, and the standard cascade argument, which assumes the current settles before the speed moves, follows immediately. Here  $\tau_e$  is more than twice  $\tau_m$ , because the 276 mH smoothing inductor has made the electrical circuit unusually slow. The time-scale separation therefore does not come from the machine: it has to be created by the controllers, and this is precisely what the choice  $t_{r,i} = 0.1$  s against  $t_{r,w} = 1$  s does. The current controller must actively speed the electrical dynamics up.

## 4 Controller design

Both controllers are implemented with the Simulink *PID* block in parallel form with the two-degree-of-freedom option disabled,  $C(s) = K_p + K_i/s + K_d \frac{N}{1 + N/s}$  with a derivative filter coefficient  $N = 100$ ; the speed loop uses only the PI terms.

They are tuned analytically using two ideas. The first is pole–zero cancellation: the controller zeros are placed on the plant poles so that the open loop becomes a pure integrator, whose closed loop is a first-order lag of exactly known time constant. The second is a settling-time criterion: a first-order lag of time constant  $\tau$  reaches 99 % of its final value after  $t_s = -\ln(0.01) \tau \approx 4.6 \tau$ , which is the source of the recurring factor 4.6.

### 4.1 Inner current loop

Neglecting the back-EMF coupling, which is legitimate because the speed varies far more slowly than the current within the bandwidth of this loop, the plant from control signal to current is the converter lag in series with the armature electrical lag:

$$P_i(s) = \frac{b}{(1 + \tau_e s)(1 + T_c s)}, \quad b = \frac{22}{R_a} = 9.442. \quad (19)$$

Writing the PID with its zeros exposed and choosing

$$\frac{K_p}{K_i} = \tau_e + T_c, \quad \frac{K_d}{K_i} = \tau_e T_c \quad (20)$$

makes its numerator factor as  $(1 + \tau_e s)(1 + T_c s)$ , which cancels both plant poles. The open loop collapses to  $L(s) = K_i b/s$  and the closed loop is first order with  $\tau_{cl} = 1/(K_i b)$ . Imposing  $t_s = 4.6 \tau_{cl} = t_{r,i}$  fixes the gains:

$$K_i = \frac{4.6}{t_{r,i} b}, \quad K_p = (\tau_e + T_c) K_i, \quad K_d = \tau_e T_c K_i. \quad (21)$$

For  $t_{r,i} = 0.1$  s this gives  $K_i = 4.872$ ,  $K_p = 0.607$  and  $K_d = 0.001$ . The derivative term is

very small because  $T_c$  is very small, so in practice the controller is a PI with a minor correction for the converter dead time. It is worth noting that this is exactly what one would expect: the derivative action exists only to cancel the fastest pole, and that pole is nearly at infinity on the time scale of the loop.

#### 4.2 Outer speed loop

With the current loop fast and close to unity gain within its bandwidth, the mechanical plant seen by the speed controller reduces to a first-order lag between current demand and speed,

$$P_\omega(s) = \frac{a}{1 + \frac{J}{k}s}, \quad a = \frac{k\Phi}{k} = 45.6, \quad (22)$$

where  $k = 1.25 \times 10^{-2}$  is the equivalent damping and measurement scaling used in the models. A PI controller cancels the mechanical pole when  $K_p/K_i = J/k$ , again reducing the open loop to  $K_i a/s$ ; imposing  $t_s = 4.6/(K_i a) = t_{r,w}$  gives

$$K_i = \frac{4.6}{t_{r,w} a}, \quad K_p = \frac{J}{k} K_i. \quad (23)$$

For  $t_{r,w} = 1$  s this gives  $K_i = 0.1009$  and  $K_p = 0.0605$ .

**Table 3.** Analytically tuned controller gains.

| Loop            | Type | $K_p$  | $K_i$  | $K_d$ | Target response   |
|-----------------|------|--------|--------|-------|-------------------|
| Current (inner) | PID  | 0.607  | 4.872  | 0.001 | $t_{r,i} = 0.1$ s |
| Speed (outer)   | PI   | 0.0605 | 0.1009 | —     | $t_{r,w} = 1$ s   |

#### 4.3 Units, scaling and limiting

In the models the speed is measured through a scaling gain  $k = 1.25 \times 10^{-2}$ , and the reference and display use the conversions  $60/2\pi$  from rad/s to rpm and  $2\pi/60$  in the opposite direction. These factors have no dynamic effect but they must be applied consistently, since a missing conversion changes the effective loop gain by a factor of about 9.55 and would silently invalidate the tuning.

The current reference is hard-limited by a saturation block. This is the element that makes the cascade worth building in the first place: without it, a large speed step would demand an arbitrarily large current, which the thyristors would not survive. With it, a large step simply produces a constant-current, and therefore constant-torque, acceleration until the speed error becomes small enough for the loop to return to its linear range.

#### 4.4 An alternative tuning for constant load torque

When the load torque is constant rather than viscous, the speed loop can be tuned instead by direct second-order pole placement with a chosen damping ratio  $\zeta$  and natural frequency  $\omega_n$ :

$$K_p = \frac{2\zeta\omega_n J}{k\Phi}, \quad K_i = \frac{\omega_n^2 J}{k\Phi}, \quad (24)$$

the current loop then using  $\tau_m = 53.8 \text{ ms}$  in place of  $\tau_e + T_c$ . This variant is analysed in Section 5 because it makes the separate roles of  $\zeta$  and  $\omega_n$  directly visible, which the pole–zero cancellation design deliberately hides by forcing a first-order response.

## 5 Python verification and parametric study

The MATLAB design was re-implemented independently in Python, using NumPy, SciPy and Matplotlib, for two reasons: to confirm the tuning on a platform that shares no code with the Simulink models, and to visualise how the closed-loop response depends on the design targets  $t_r$ ,  $\zeta$  and  $\omega_n$ .


### 5.1 Cross-check of the design quantities

**Table 4.** Design quantities: MATLAB versus the independent Python implementation.

| Quantity                  | MATLAB                | Python                |
|---------------------------|-----------------------|-----------------------|
| Load coefficient $K_r$    | 0.031697              | 0.031697              |
| DC gain $G(0)$            | 1.428 00              | 1.428 00              |
| Steady-state speed        | 3000.0 rpm            | 3000.0 rpm            |
| Current PID $K_p/K_i/K_d$ | 0.607 / 4.872 / 0.001 | 0.607 / 4.872 / 0.001 |
| Speed PI $K_p/K_i$        | 0.0605 / 0.1009       | 0.0605 / 0.1009       |

The two implementations agree to the printed precision on every quantity. This is the minimum that should be expected of a correct port, but it is worth recording, because a disagreement here would have pointed to a unit-conversion error or to a different interpretation of  $K_r$ , both of which are easy to make.

**Designed operating point — 220 V / 3000 rpm (10× time-scale separation)**

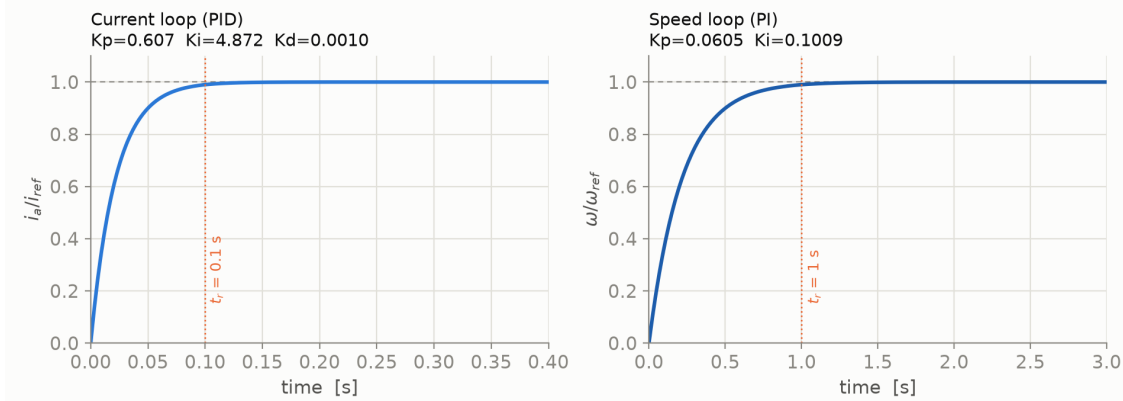


**Figure 3.** Step responses at the designed operating point: inner current loop (left) and outer speed loop (right), showing the deliberate ten-to-one time-scale separation.

Figure 3 shows the two loops at the designed operating point. The current loop settles in about 0.1 s and the speed loop in about 1 s, exactly as specified, and neither exhibits overshoot: pole–zero cancellation makes both closed loops first order by construction.

## 5.2 First order: the response time sets the rise time

After pole-zero cancellation the current loop is exactly first order,  $T(s) = 1/(1 + \tau s)$  with  $\tau = t_{r,i}/4.6$ . Sweeping the target  $t_{r,i}$  slides the single closed-loop pole along the real axis and therefore scales the rise time, with no overshoot at any setting.

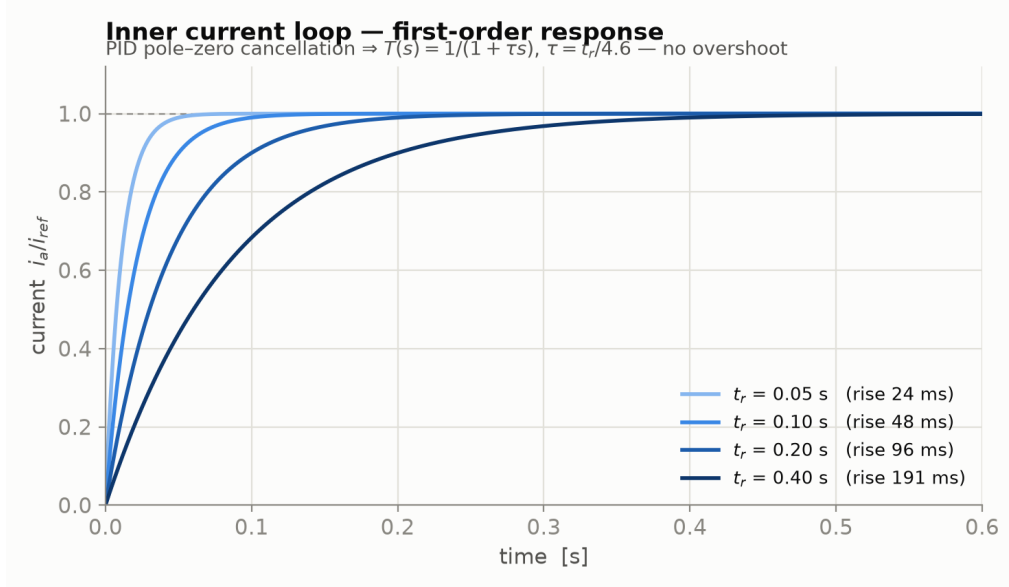

**Figure 4.** First-order current loop: the response-time target sets the rise time, with no overshoot at any setting.

**Table 5.** First-order current loop: rise time versus the response-time target.

| $t_{r,i}$ | Closed-loop $\tau$ | 10–90 % rise time |
|-----------|--------------------|-------------------|
| 0.05 s    | 10.9 ms            | 24 ms             |
| 0.10 s    | 21.7 ms            | 48 ms             |
| 0.20 s    | 43.5 ms            | 96 ms             |
| 0.40 s    | 87.0 ms            | 191 ms            |

The measured rise times of Table 5 are consistently 2.2 times the closed-loop time constant, which is the theoretical value  $\ln 9 \approx 2.197$  for a first-order system. The agreement confirms that the cancellation is exact in the model and that no unmodelled pole is interfering.


## 5.3 Second order: the damping ratio sets the overshoot

For the constant-torque design of Section 4.4 the speed loop is second order,

$$T(s) = \frac{2\zeta\omega_n s + \omega_n^2}{s^2 + 2\zeta\omega_n s + \omega_n^2}. \quad (25)$$

Holding  $\omega_n = 5$  rad/s and sweeping  $\zeta$  moves the closed-loop poles from lightly damped to overdamped.

The overshoot is higher than the familiar textbook values, 21 % instead of about 4 % at  $\zeta = 0.707$ , and even the critically damped case overshoots by 14 % instead of not at all. The explanation is the numerator: a PI controller contributes a finite zero at  $s = -\omega_n/(2\zeta)$ , and the

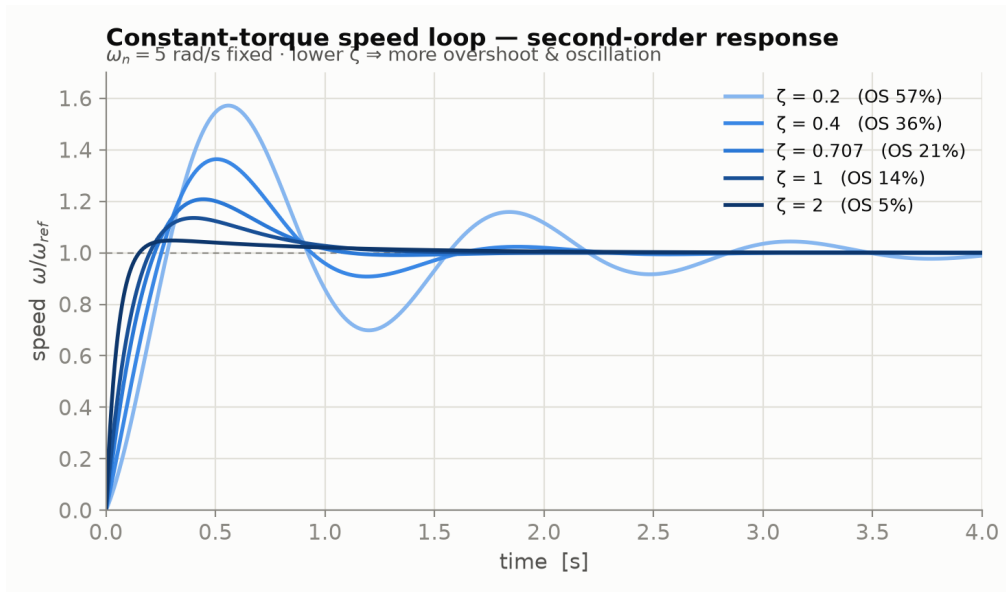

**Figure 5.** Second-order speed loop: the damping ratio sets the overshoot and the oscillation, at fixed  $\omega_n = 5 \text{ rad/s}$ .

**Table 6.** Second-order speed loop: overshoot versus damping ratio.

| $\zeta$ | Closed-loop poles              | Overshoot |
|---------|--------------------------------|-----------|
| 0.2     | complex, lightly damped        | 57 %      |
| 0.4     | complex                        | 36 %      |
| 0.707   | complex                        | 21 %      |
| 1.0     | critically damped, real, equal | 14 %      |
| 2.0     | overdamped, real, distinct     | 5 %       |


closed-loop transfer function above is therefore not the canonical second-order form found in textbooks, which has a constant numerator. The zero differentiates part of the reference, which speeds the rise but amplifies the first peak. This is precisely why the nominal design of Section 4 prefers pole–zero cancellation, which produces a first-order response with no overshoot at all.

#### 5.4 Second order: the natural frequency sets the settling time

Holding  $\zeta = 0.7$  and sweeping  $\omega_n$  preserves the shape of the response while scaling its time axis, so the settling time is inversely proportional to  $\omega_n$ .

**Table 7.** Second-order speed loop: settling time versus natural frequency.

| $\omega_n$ | $\pm 2\%$ settling time |
|------------|-------------------------|
| 2 rad/s    | 2.44 s                  |
| 5 rad/s    | 0.98 s                  |
| 10 rad/s   | 0.49 s                  |
| 20 rad/s   | 0.24 s                  |

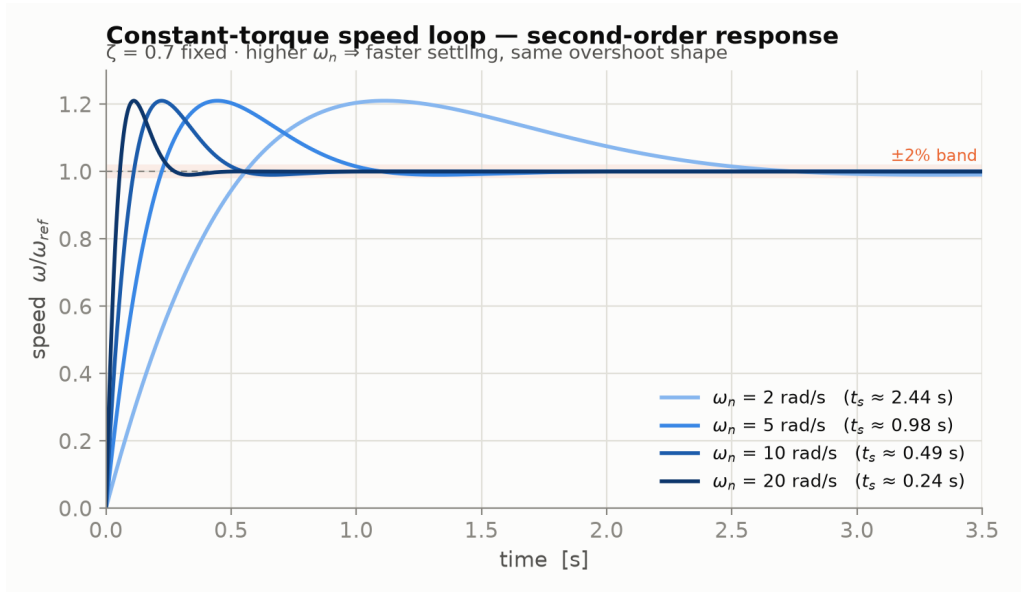


**Figure 6.** Second-order speed loop: the natural frequency sets the settling time, at fixed  $\zeta = 0.7$ .

The product  $\omega_n t_s$  is constant at about 4.9 across the whole sweep, as the theory requires. The two parameters therefore act as independent design handles:  $\omega_n$  is the bandwidth, or speed, handle and  $\zeta$  is the damping, or overshoot, handle. In the real machine  $\omega_n$  is ultimately capped by the bandwidth of the inner current loop, which is the reason the cascade needs its time-scale separation and the reason a bandwidth cannot simply be increased at will.

## 6 Simulink models and results

Three complementary models were built, in increasing order of physical fidelity. The diagrams that follow are exported directly from the models, which run on a continuous powergui solver.

### 6.1 Transfer-function block diagram

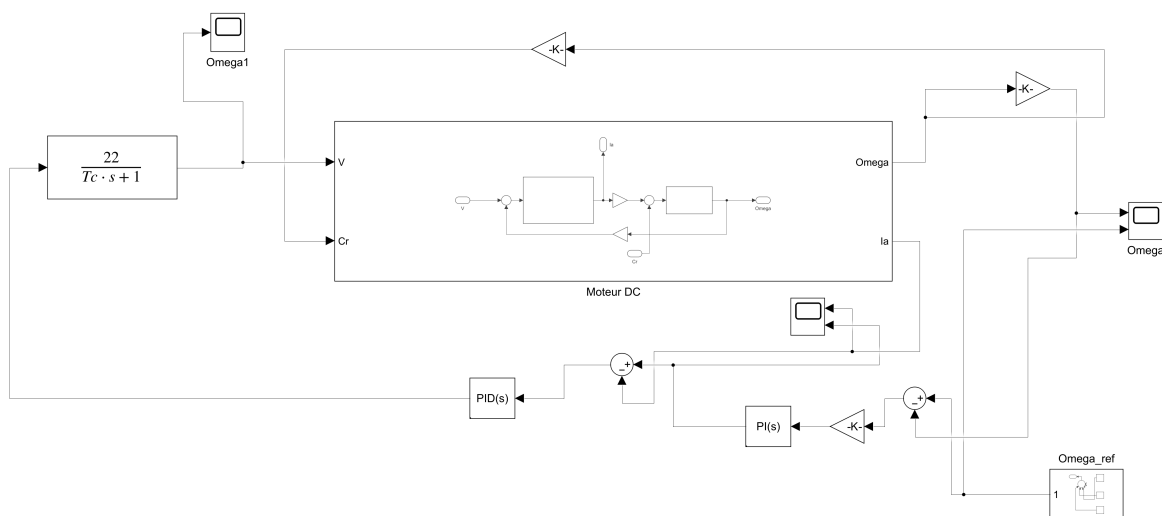


**Figure 7.** Transfer-function cascade block diagram: the idealised design model, matching Sections 2 to 4 one-to-one.

The model of Figure 7 is the idealised realisation that corresponds exactly to the analysis: the

averaged converter is the  $22/(T_c s + 1)$  block of Equation (13), the machine is the subsystem of Figure 2, and the compensators are the inner PID and the outer PI of Table 3. Because this is the design model, its response is the reference against which the others are read: the current settles in about 0.1 s and the speed reaches 3000 rpm in about 1 s with little overshoot, as intended.

### 6.2 Intermediate model with a physical machine

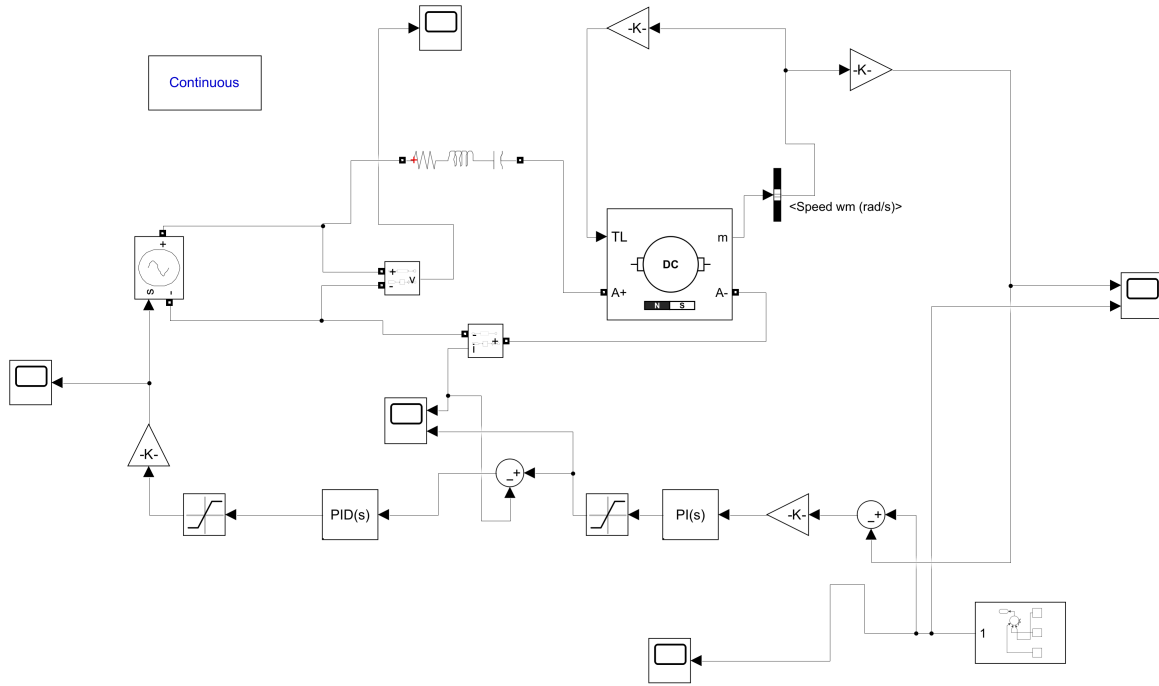

**Figure 8.** Intermediate physical model: the genuine Simscape *DC Machine* block driven by an averaged controlled voltage source.

Figure 8 is a deliberate stepping stone. It keeps the physical *DC Machine* block, so the electrical and mechanical dynamics are the genuine Simscape ones rather than a hand-built block diagram, but it drives the machine from a controlled voltage source rather than from the full bridge. The source gain  $\frac{3\sqrt{6}}{\pi} \cdot \frac{220}{10}$  embodies the same averaged-converter idea as the factor 22 of Section 2.4.


The purpose of this intermediate step is diagnostic. If the drive behaves correctly here but not in the full model of the next section, the discrepancy must come from the converter; if it already misbehaves here, the problem lies in the machine model or in the tuning. Building the hierarchy in this order isolates the two sources of error instead of confronting them simultaneously.

### 6.3 Full physical model with the switching thyristor bridge

Figure 9 is the highest-fidelity model, built entirely from Simscape Electrical library blocks: the three-phase source, the six-pulse thyristor bridge, the firing-angle generator of Figure 1 with its synchronised pulse generator, the 276 mH smoothing inductor and the *DC Machine* block, with the same cascade controllers.

Relative to the averaged model it exposes exactly the phenomena the tuning was designed to tolerate:

- the 300 Hz current ripple, which the smoothing inductor attenuates but does not remove,

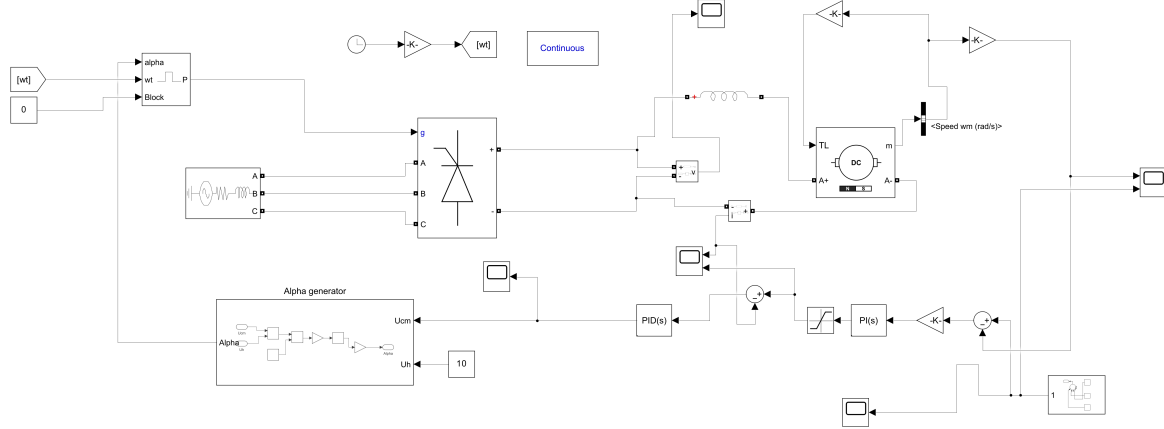

**Figure 9.** Full physical model: three-phase source, six-pulse thyristor bridge, firing-angle generator and synchronised pulse generator, smoothing inductor and DC machine.

and which the current controller must not attempt to follow;

- the firing dead time  $T_c = 1.667$  ms, which is embedded in the current-loop gains through the term  $\tau_e + T_c$  and through  $K_d$ ;
- the discrete nature of thyristor conduction, which means the converter cannot respond between firings regardless of what the controller commands.

The dead-time term in the PID and the saturation on the current reference keep the drive stable and current-limited despite the ripple, and the mean current and speed still reach the 3000 rpm target. This is the outcome the whole averaged design was aiming at, and it is worth stating explicitly what it demonstrates: not that the averaged model is accurate — it manifestly discards the ripple — but that the controller designed on it is robust to what it discards.

## 7 Discussion and limitations

**One-quadrant operation in practice.** The bridge is four-quadrant in voltage but only one-quadrant in current, since thyristors conduct in one direction only. Regenerative braking therefore requires the machine to keep its current sign while the voltage reverses, which is possible for a motor whose speed reverses but not for one whose torque must reverse at constant speed. A genuinely four-quadrant drive requires two anti-parallel bridges with a changeover strategy, which is outside the scope of this study.

**Constant field.** The whole analysis relies on  $k\Phi$  being constant, which restricts operation to the base-speed region. Operation above base speed would require field weakening, adding a second, slow control loop on the field current and making  $k\Phi$  a variable in every equation of Section 3.

**The load model.** The load has been represented as purely viscous, with  $K_r$  back-computed from the desired operating point through (17). This is a convenient choice because it makes the operating point exact by construction, but it is also a strong assumption: a real load with constant torque, or with a torque proportional to the square of the speed as in a fan, would change the small-signal gain of the plant and therefore the effective loop tuning. The alternative design of Section 4.4 exists precisely to cover the constant-torque case.

**Neglected commutation overlap.** The averaged model of Equation (6) assumes instantaneous commutation. In a real bridge the source inductance causes an overlap angle during which two thyristors in the same group conduct simultaneously, which reduces the mean output voltage by a term proportional to the load current. This appears as an additional apparent resistance in series with the armature, and at high current it would shift the operating point slightly below the predicted value.

## 8 Conclusion

A cascade speed and current controller for a thyristor-fed separately excited DC machine has been developed in full detail. The controlled rectifier was analysed from first principles, from the six-pulse bridge and its cosine voltage law to the firing-angle generator whose inverse-cosine law linearises the converter, and was then condensed into the average-value model  $22/(T_c s + 1)$ , whose gain and lag were both derived from the drive's own quantities rather than assumed.

On that linear plant, the PI and PID gains were obtained analytically by pole-zero cancellation combined with a settling-time criterion. The resulting design has transparent and independently adjustable targets: one number sets the current-loop response time, another sets the speed-loop response time, and the ratio between them is the time-scale separation that makes the cascade valid. The same framework also accommodates the alternative constant-torque design, in which the roles of the damping ratio and of the natural frequency become explicit.

The design was verified twice. The independent Python implementation reproduced every design quantity to the printed precision and quantified the parameter dependencies, confirming the first-order behaviour of the current loop, the  $\zeta$ -dependence of the overshoot and the  $1/\omega_n$  dependence of the settling time, including the effect of the PI zero that makes the overshoot larger than the canonical second-order values. The hierarchy of Simulink models, ending with the full switching bridge, then confirmed the intended behaviour at the 220 V and 3000 rpm operating point in the presence of the real ripple, the firing dead time and the discrete conduction of the thyristors.

## References

- [1] W. Leonhard, *Control of Electrical Drives*, 3rd ed. Berlin: Springer, 2001.
- [2] N. Mohan, T. M. Undeland and W. P. Robbins, *Power Electronics: Converters, Applications and Design*, 3rd ed. Hoboken: Wiley, 2003.
- [3] P. C. Sen, *Thyristor DC Drives*. New York: Wiley, 1981.
- [4] R. Krishnan, *Electric Motor Drives: Modeling, Analysis and Control*. Upper Saddle River: Prentice Hall, 2001.
- [5] K. J. Åström and T. Hägglund, *Advanced PID Control*. Research Triangle Park: ISA, 2006.
- [6] G. F. Franklin, J. D. Powell and A. Emami-Naeini, *Feedback Control of Dynamic Systems*, 7th ed. Harlow: Pearson, 2015.

## A Summary of the design computations

Table 8 collects the whole design chain in the order in which the quantities are computed, so that the numerical results can be reproduced.

**Table 8.** Design chain, in computation order.

| Step                     | Expression                 | Value     | Unit                   |
|--------------------------|----------------------------|-----------|------------------------|
| Target speed in rad/s    | $3000 \times 2\pi/60$      | 314.16    | rad/s                  |
| Load coefficient         | Eq. (17)                   | 0.031 697 | N·m·s                  |
| DC gain                  | $G(0)$                     | 1.428 00  | rad·s <sup>-1</sup> /V |
| Steady-state check       | $G(0) \times 220$          | 3000.0    | rpm                    |
| Electrical time constant | $(L_a + L_f)/R_a$          | 0.1230    | s                      |
| Mechanical time constant | $JR_a/k\Phi^2$             | 0.0538    | s                      |
| Converter gain           | 220/10                     | 22        | V/unit                 |
| Converter lag            | $1/(2 \times 6 \times 50)$ | 1.667     | ms                     |
| Current-loop plant gain  | $K_c/R_a$                  | 9.442     | A/unit                 |
| Current $K_i$            | $4.6/(t_{r,i} b)$          | 4.872     | –                      |
| Current $K_p$            | $(\tau_e + T_c)K_i$        | 0.607     | –                      |
| Current $K_d$            | $\tau_e T_c K_i$           | 0.001     | –                      |
| Speed-loop gain          | $k\Phi/k$                  | 45.6      | –                      |
| Speed $K_i$              | $4.6/(t_{r,w} a)$          | 0.1009    | –                      |
| Speed $K_p$              | $(J/k)K_i$                 | 0.0605    | –                      |

## B Organisation of the accompanying models

**Table 9.** Organisation of the accompanying code and models.

| Path                      | Contents                                               |
|---------------------------|--------------------------------------------------------|
| MATLAB/Main & Setup/      | main.m, dc_machine_params.m, dc_tf_function.m          |
| MATLAB/PID Block Diagram/ | transfer-function block-diagram model                  |
| MATLAB/Library/           | Simscape Electrical model with the thyristor bridge    |
| MATLAB/assets/            | diagrams exported from the models                      |
| Python/                   | independent port reproducing the tuning and the sweeps |
| Python/results/           | the response and parametric figures of Section 5       |

To reproduce the results, open `main.m`, set the machine preset, the target armature voltage and the target speed, and run it. The script prints the tuned gains and populates the workspace, after which any of the Simulink models can be opened and run. The Python scripts are self-contained and regenerate the figures of Section 5 directly.