

Connect the +12V input to the top right corner (pin10) of the EXP 2 connector (can be done at the bottom of the board) and pin 10 goes further to the Arduino VIN pin



To Arduino VIN pin

Put 2 jumpers here to connect all 3 Enable signals together

12V power input from the DC PSU or battery

Put the jumper to the top 2 pins to set 5V

Put 2-2 jumpers here to set 1/16 steps
And remove the 2-2 jumpers from the pins above (if they are installed by default)

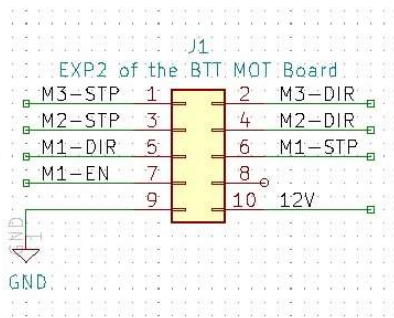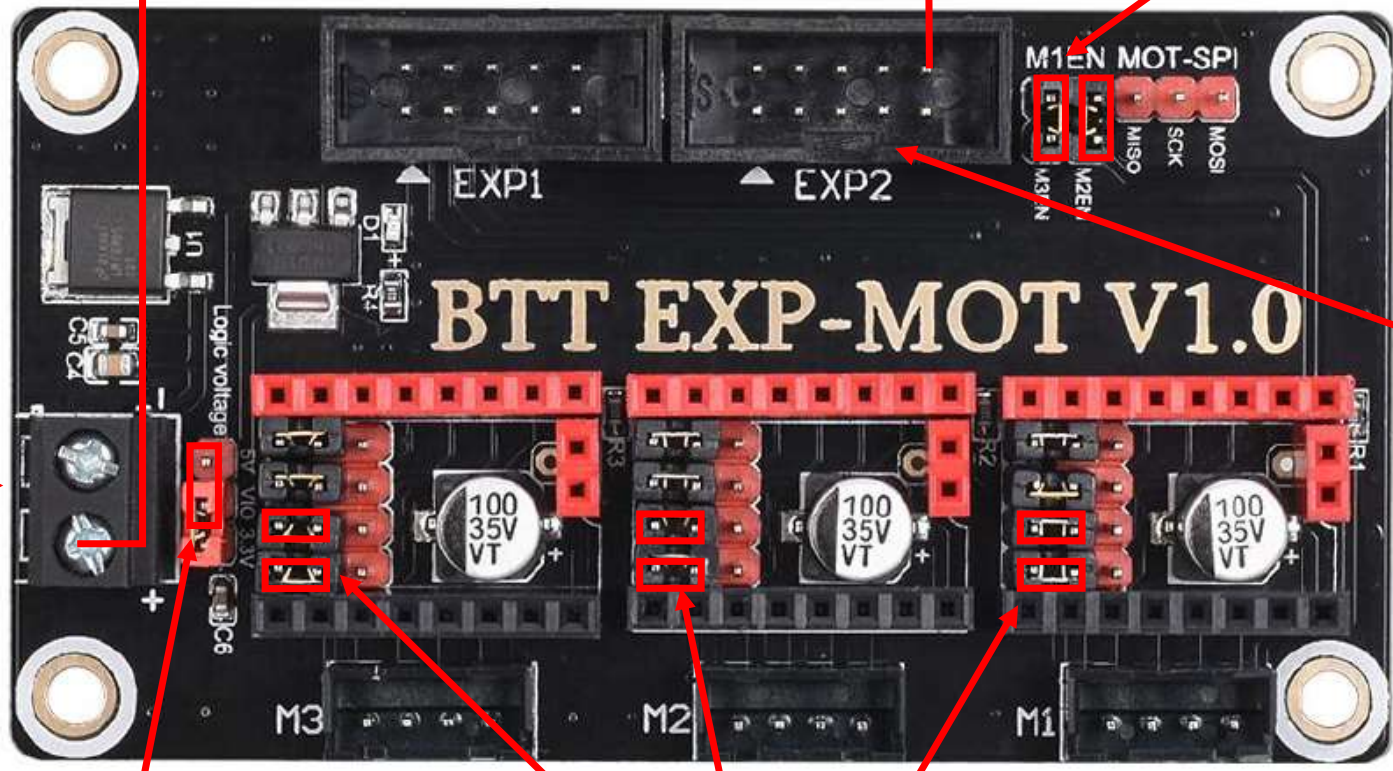

EXP 2 pinout.
Further details in the schematic