

AURA / EVT-A03 NATIVE ELECTRICAL DESIGN

Radio and debug

nRF52840 BLE radio
SWD programming and recovery pads
3.0 V normal-voltage module supply

File: a03-radio.kicad_sch

Audio and privacy

Dual PDM microphones and bus isolation
Mechanical microphone power cut
Hardwired amber microphone-power indicator

File: a03-audio.kicad_sch

Offline storage

1 Gbit SPI NAND for offline audio
Power-up write-protect and hold pull-ups
Firmware must manage ECC and bad blocks

File: a03-storage.kicad_sch

Charging and thermal limit

53 mA nominal charger and system power path
Pack NTC comparator; default-off charge permission
Protected 4.2 V cell and qualified NTC required

File: a03-charging.kicad_sch

System power and controls

3.0 V system rail and battery fuel gauge
Tactile capture button
Closed-loop LRA haptic driver

File: a03-controls.kicad_sch

AURA product engineering


Sheet: /
File: aura-a03-electrical.kicad_sch

Title: AURA / Native electrical design

Size: A4 Date: 2026-09-08
KiCad E.D.A. 10.0.4

Rev: EVT-A03
Id: 1/6

AURA A03 / RADIO + PROGRAMMING

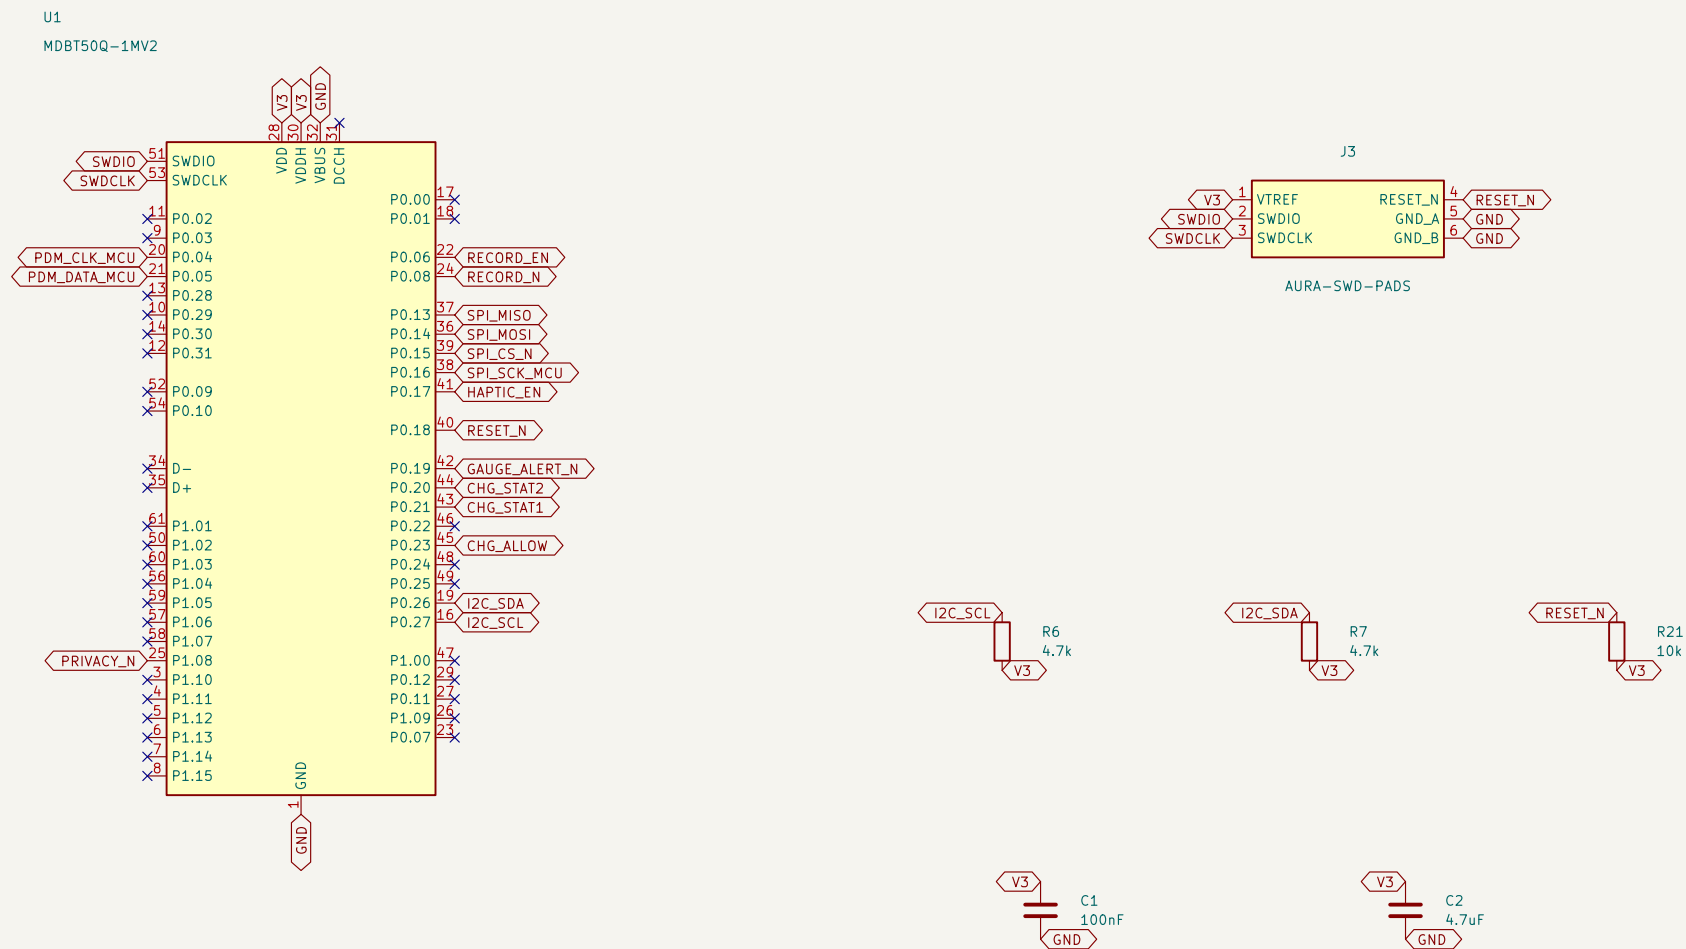

AURA product engineering

Sheet: /Radio and debug/
File: a03-radio.kicad_sch

Title: AURA / Radio and programming

Size: A4


Date: 2026-09-08

KiCad E.D.A. 10.0.4

Rev: EVT-A03


Id: 2/6

AURA A03 / AUDIO + HARDWARE PRIVACY

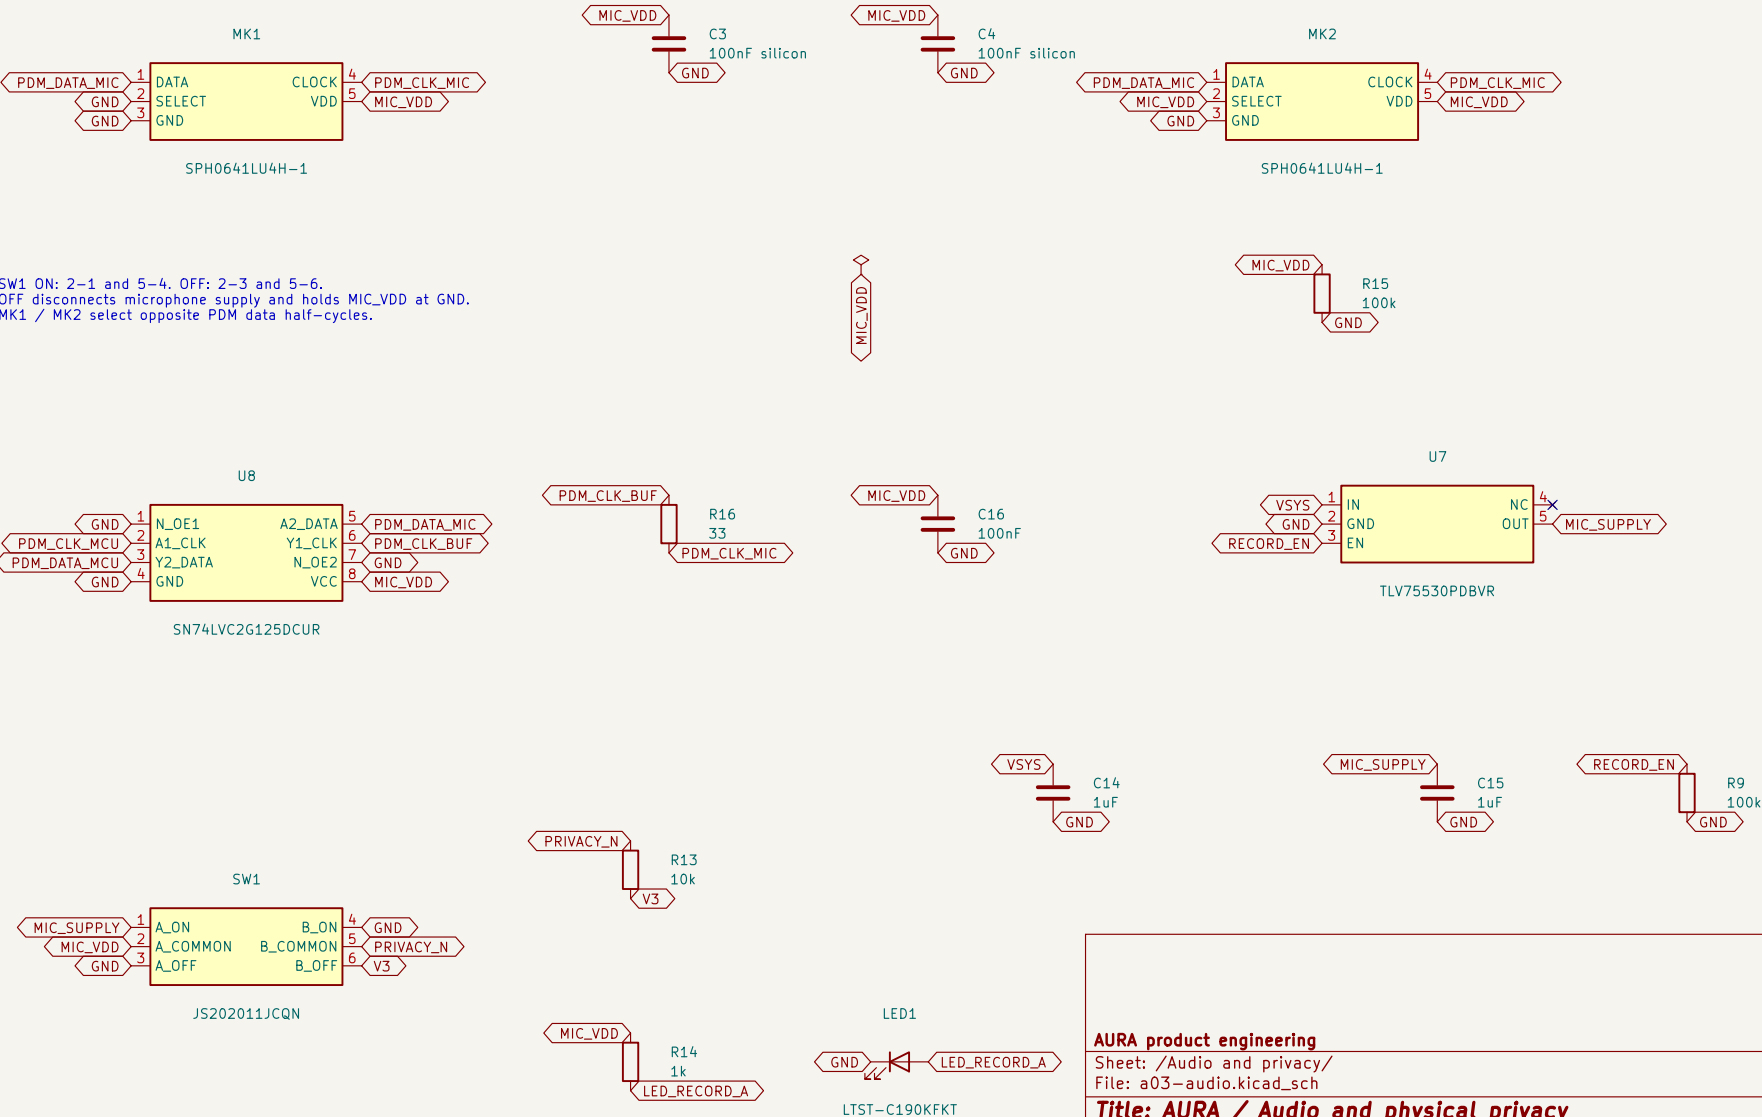

AURA product engineering	
Sheet: /Audio and privacy/ File: a03-audio.kicad_sch	
Title: AURA / Audio and physical privacy	
Size: A4	Date: 2026-09-08
KiCad E.D.A. 10.0.4	Rev: EVT-A03 Id: 3/6


AURA A03 / OFFLINE FLASH STORAGE

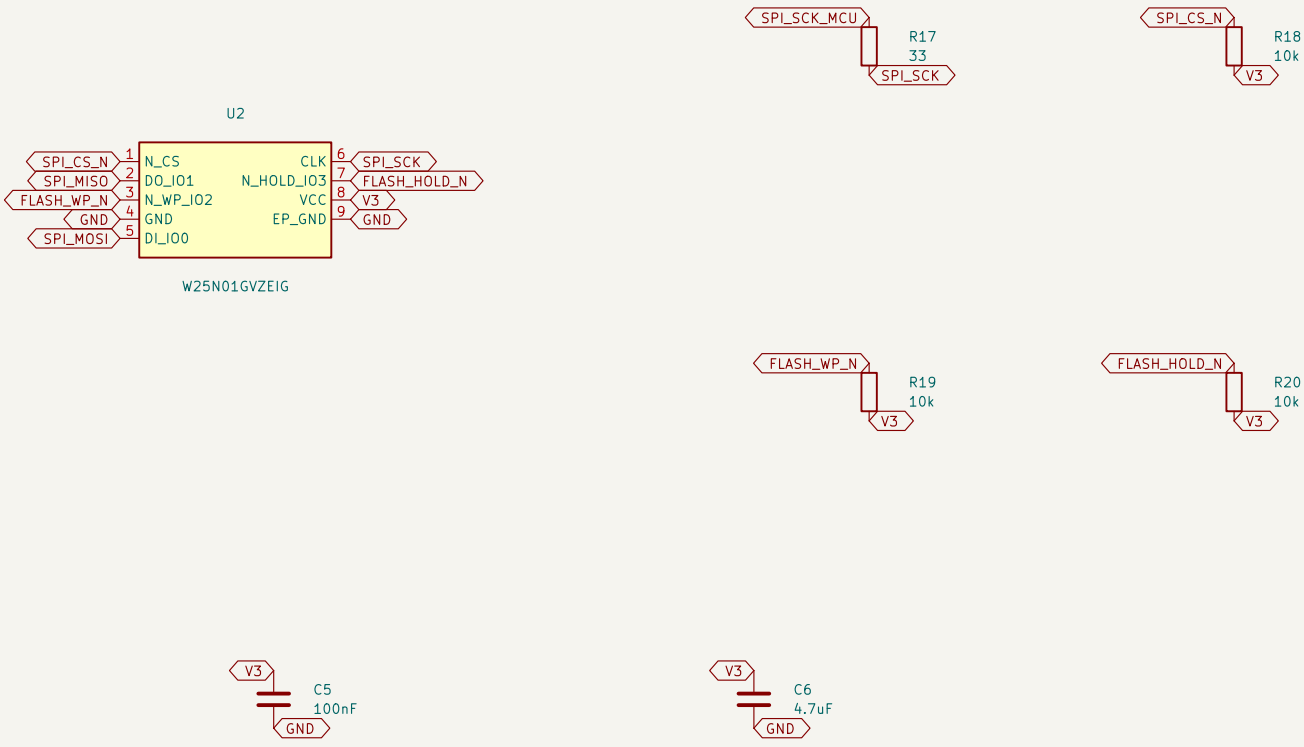

ZE package exposed pad pin 9 connects to GND.
Provide NAND ECC, bad-block mapping and wear management.
Audio encryption and crash-safe file recovery belong in firmware.

AURA product engineering		
Sheet: /Offline storage/		
File: a03-storage.kicad_sch		
Title: AURA / Offline flash storage		
Size: A4	Date: 2026-09-08	Rev: EVT-A03
KiCad E.D.A. 10.0.4		Id: 4/6

AURA A03 / CHARGING + THERMAL PERMISSION

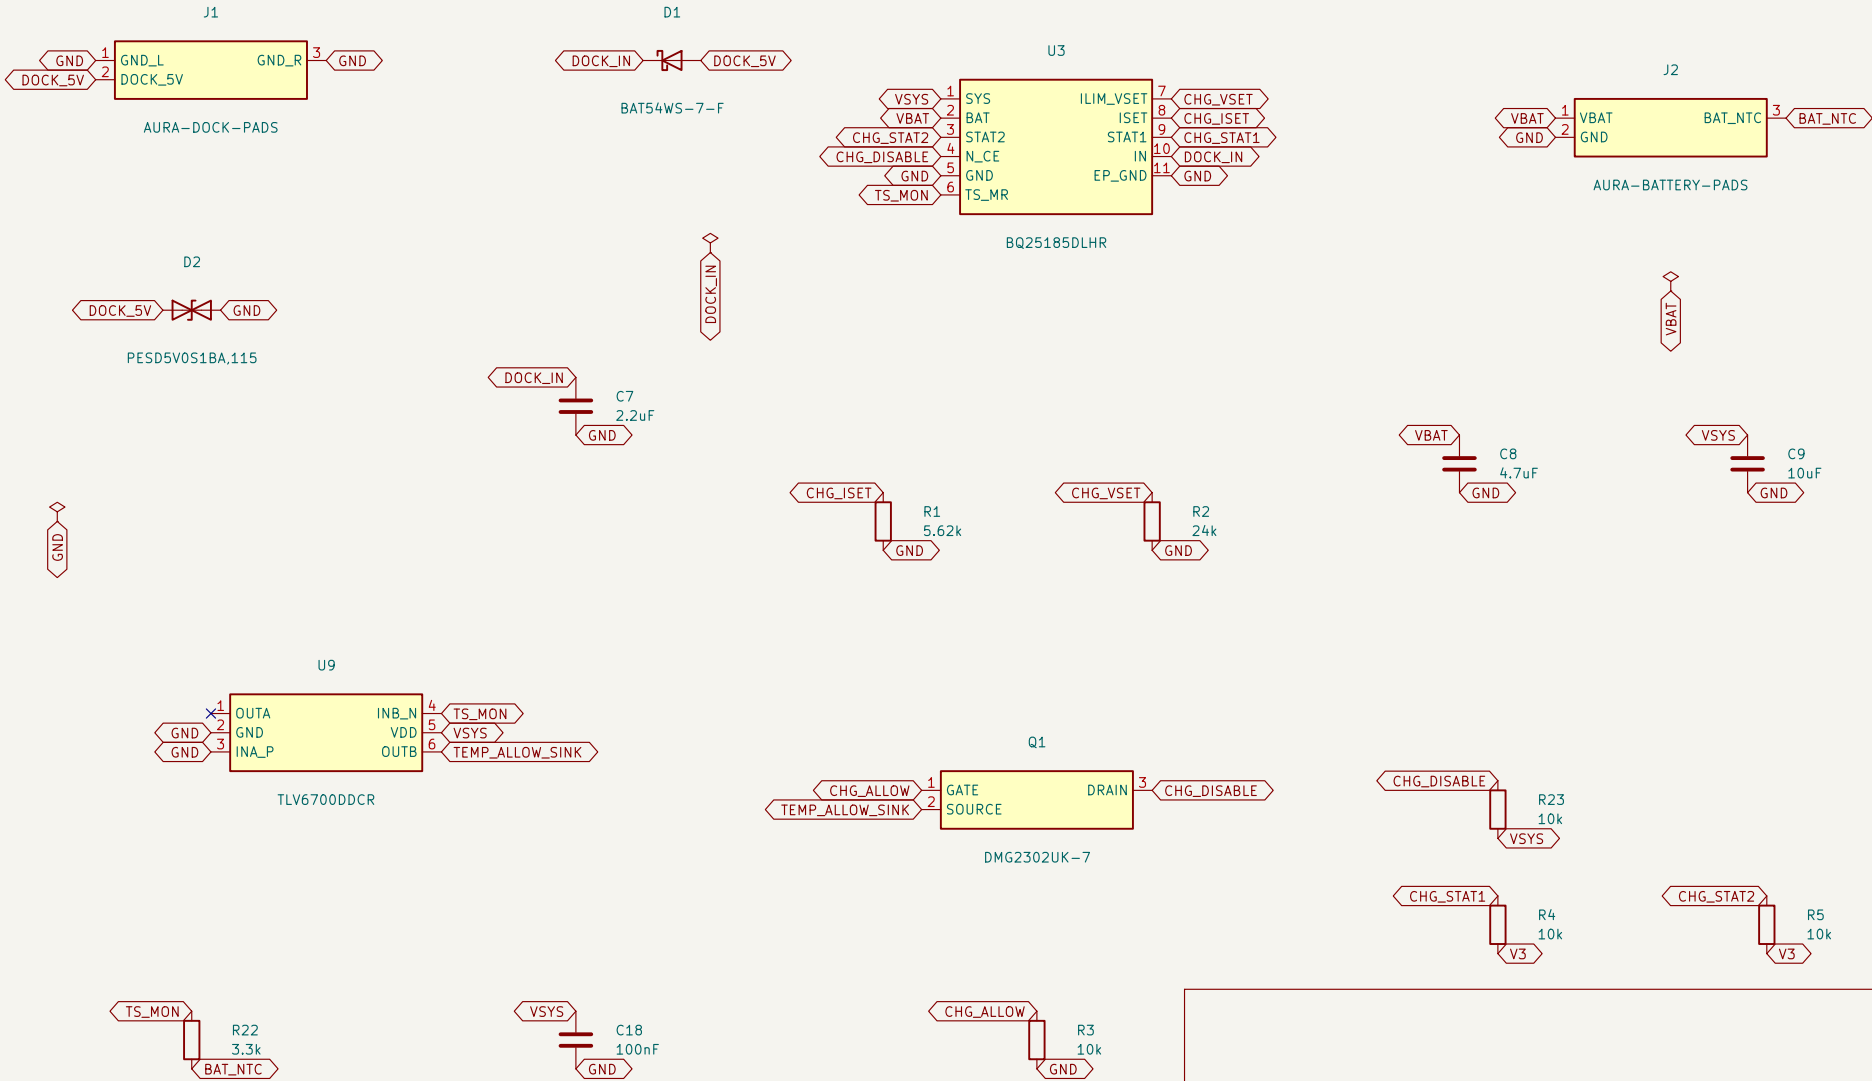

U9 OUTB sinks when TS_MON > 0.4 V. Validate with the selected cell and NTC.
Q1 body diode: source pin 2 to drain pin 3. CHG_ALLOW defaults low.
53 mA nominal charge current; bench thermal and pack-fault tests required.

AURA product engineering

Sheet: /Charging and thermal limit/
File: a03-charging.kicad_sch

Title: AURA / Charging and thermal permission

Size: A4

Date: 2026-09-08

Rev: EVT-A03

KiCad E.D.A. 10.0.4

Id: 5/6

AURA A03 / POWER + RECORD + HAPTICS

