


TOP VIEW FROM +Z / CAD +Y UP / NO HOLES



t = 0.300 MESH REF

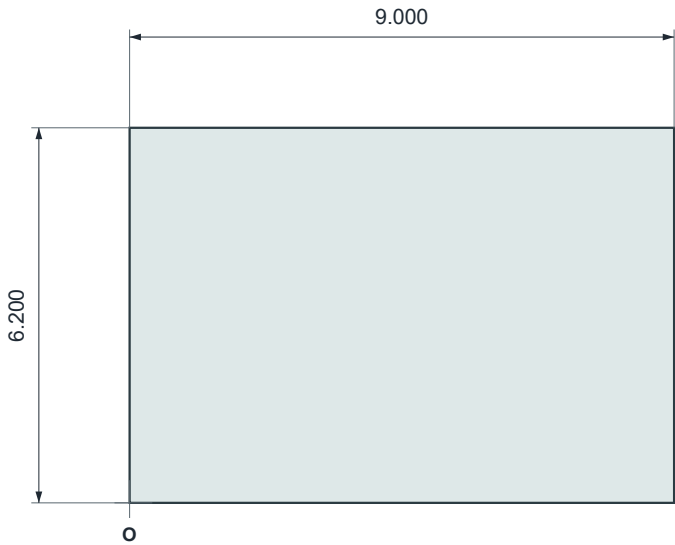

EDGE VIEW / NO BENDS

O = lower-left envelope intersection; not a machined datum.

VIEW SCALE 8:1 AT A4 / 100%. NOMINAL DIMENSIONS IN mm; DO NOT SCALE FOR FABRICATION.

MATERIAL / CERTIFICATE

ASTM A666 Type 301 / UNS S30100, HALF-HARD. Explicit lot certificate: 0.2% yield $\geq$ 110 ksi (758 MPa). Temper or hardness alone is insufficient.

THICKNESS / DEFINED ACCEPTANCE

Actual incoming metal: 0.28-0.32 mm. Preserve this minimum finished metal thickness after processing. Mesh thickness is a geometry gauge.

CUTTING / EDGES

Preserve the supplied cold-worked temper. Quote cold cutting or cool machining and deburring. No anneal, weld or hot straightening without requalification. Thermal-cut edges require retained-property qualification.

PROFILE / FLATNESS

No kerf compensation is included. Exact source facets are retained; no fitted arcs, fillets or chamfers are authorized. Preserve net CAD section after finishing. Quote achievable XY tolerance, edge condition and flatness for review; no numeric limits are approved here.

INSULATION / RELEASE GATES

No burr or sharp edge may damage fitted insulation. Complete metal work before adhesive/insulation assembly. Coverage, retention, dielectric adequacy and finished packet fit remain unqualified. Native PCB fit and physical strength are not approved.

SUPPLIER DATA / NO STOCK CONFIRMATION

0.02-1.57 mm strip capability covers these thicknesses. This does not establish stock, lot, width, MOQ or process acceptance.

R1 - Elgiloy 301 material data

R2 - Elgiloy strip capability


Origin in assembly CAD XY: -11.500000, -7.600000 mm. DXF is 1:1, INSUNITS = 4 (mm).

BLEND SHA256 3409634192e4be88350e3d758d46225f96e341f8e857ea225b55178e15054cd9

DXF SHA256 6669b0bb49ea843bb250d72d0fa6c623d7b310a487fc08e510ff3ea9aa35dcea

Frozen source profiles verified against both depth variants and STL caps. Full concordance: profiles.json / manufacturing-verification.json.

TOP VIEW FROM +Z / CAD +Y UP / NO HOLES

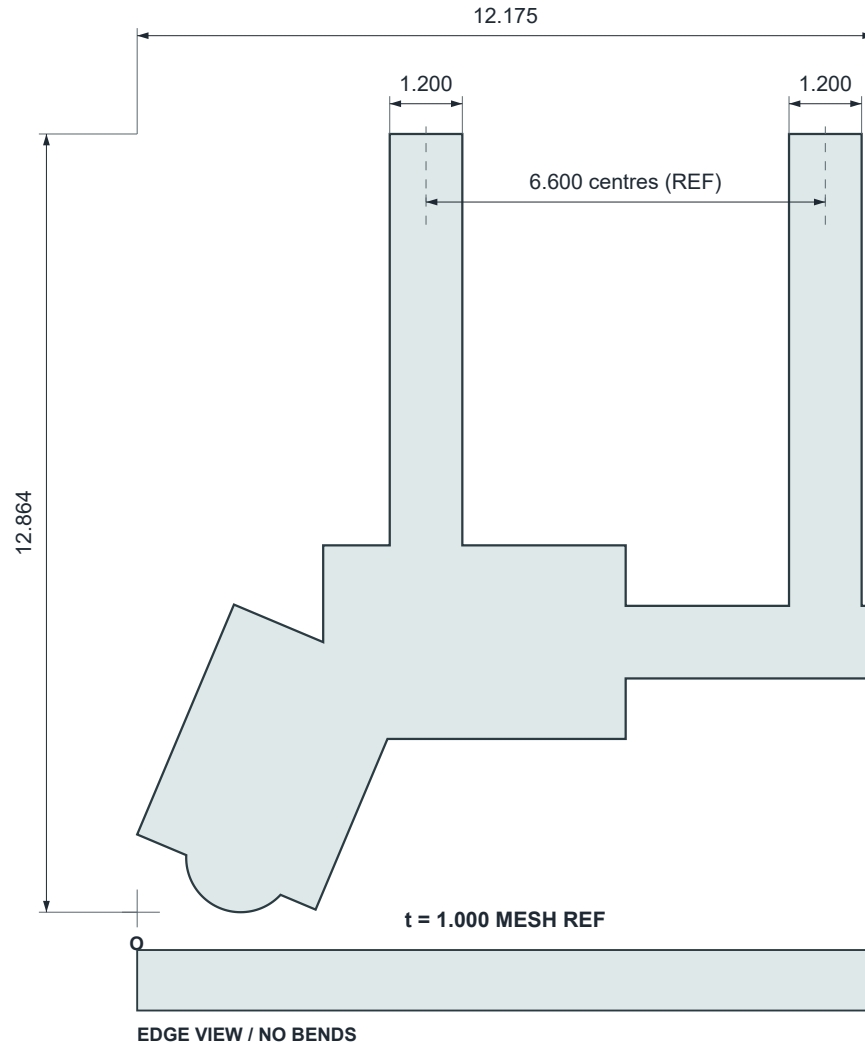

O = lower-left envelope intersection; not a machined datum.

VIEW SCALE 8:1 AT A4 / 100%. NOMINAL DIMENSIONS IN mm; DO NOT SCALE FOR FABRICATION.

MATERIAL / CERTIFICATE

ASTM A666 Type 301 / UNS S30100, HALF-HARD. Explicit lot certificate: 0.2% yield $\geq$ 110 ksi (758 MPa). Temper or hardness alone is insufficient.

THICKNESS / DEFINED ACCEPTANCE

Actual incoming metal: 0.95-1.00 mm; no plus tolerance beyond 1.00 mm. Preserve this minimum finished metal thickness after processing. Mesh thickness is a geometry gauge.

CUTTING / EDGES

Preserve the supplied cold-worked temper. Quote cold cutting or cool machining and deburring. No anneal, weld or hot straightening without requalification. Thermal-cut edges require retained-property qualification.

PROFILE / FLATNESS

No kerf compensation is included. Exact source facets are retained; no fitted arcs, fillets or chamfers are authorized. Preserve net CAD section after finishing. Quote achievable XY tolerance, edge condition and flatness for review; no numeric limits are approved here.

INSULATION / RELEASE GATES

No burr or sharp edge may damage fitted insulation. Complete metal work before adhesive/insulation assembly. Coverage, retention, dielectric adequacy and finished packet fit remain unqualified. Native PCB fit and physical strength are not approved.

SUPPLIER DATA / NO STOCK CONFIRMATION

0.02-1.57 mm strip capability covers these thicknesses. This does not establish stock, lot, width, MOQ or process acceptance.

R1 - Elgiloy 301 material data

R2 - Elgiloy strip capability

Origin in assembly CAD XY: -15.074617, -14.264318 mm. DXF is 1:1, INSUNITS = 4 (mm).

BLEND SHA256 3409634192e4be88350e3d758d46225f96e341f8e857ea225b55178e15054cd9

DXF SHA256 77bcf16addb7a588ffd2e97a96ff95e48bdbd65f98982af6cd2d5ca0d71a4b86

Frozen source profiles verified against both depth variants and STL caps. Full concordance: profiles.json / manufacturing-verification.json.