


C2: ESP32-S3-Zero (castellated; agreed pads only)

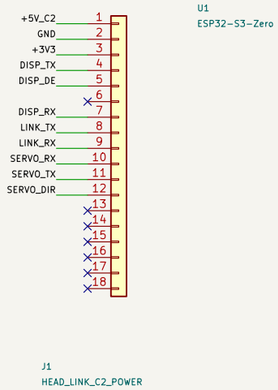


RS-422: RX C0TX (120R here), TX C2TX

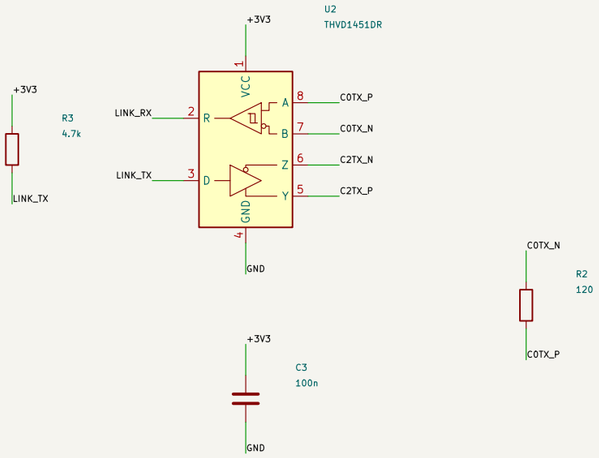

DISPLAY: half-duplex RS-485 to D1, 115200; THVD1450 fail-safe, no termination

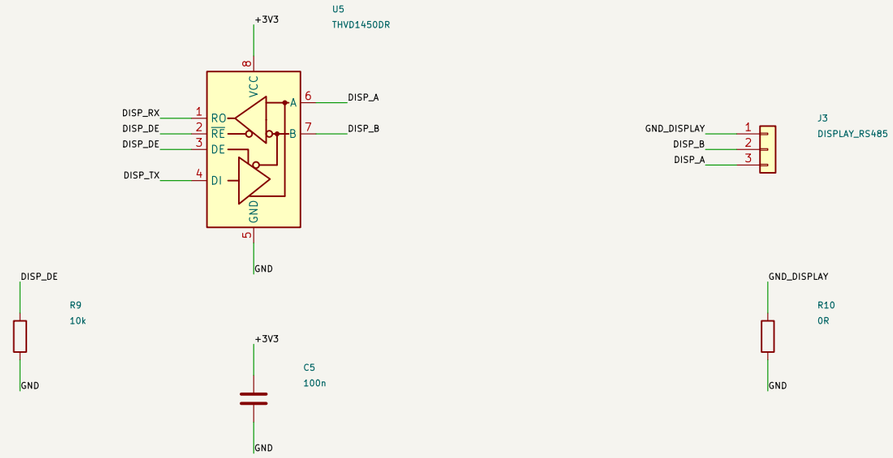

HEAD LINK J9-1 ORDER + C2 POWER (W43/W42 via head junction) SERVO BUS: DIR high = TX, one 10k pull-up to 3V3, no 12 V pull-up

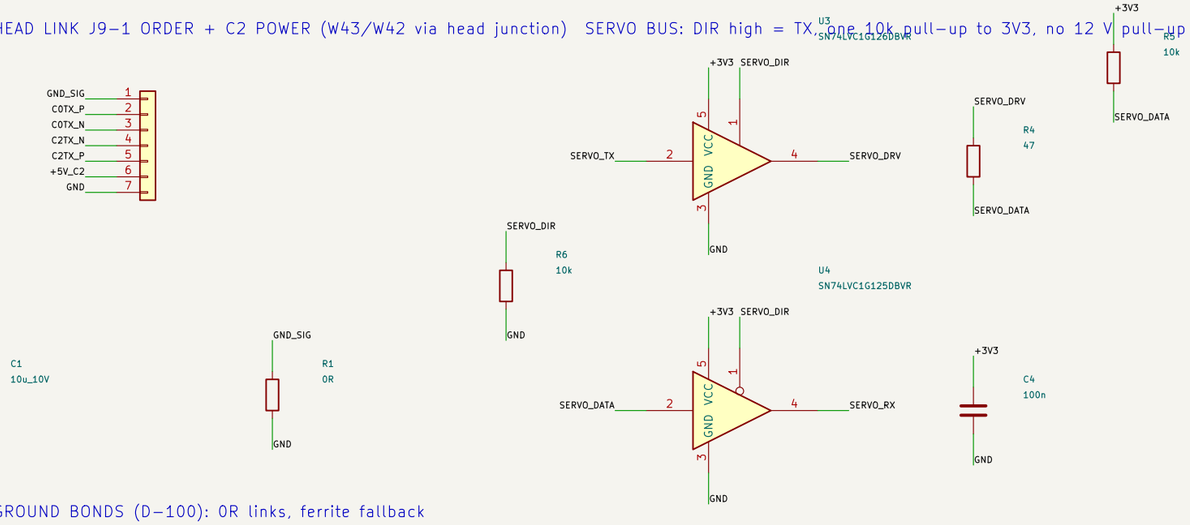

GROUND BONDS (D-100): 0R links, ferrite fallback



D-093 / D-100 / D-102: signals only; all head grounds join here

Makad

Sheet: /

File: pcb-12-c2-head-carrier.kicad_sch

Title: PCB-12 C2 head carrier

Size: A3	Date: 2026-11-10	**Rev: A**
KiCad E.D.A. 10.99.0-5923-gde08734017		Id: 1/1