


REV	DATE	DESCRIPTION
A	2026-10-30	FIRST ISSUE; FLANGE DIA 21 (D-071)

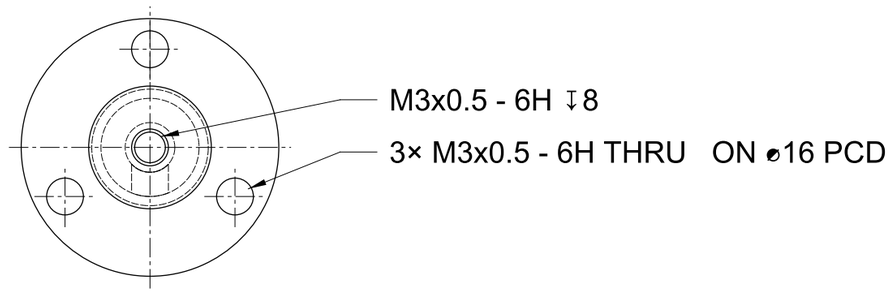


TOP



ISOMETRIC

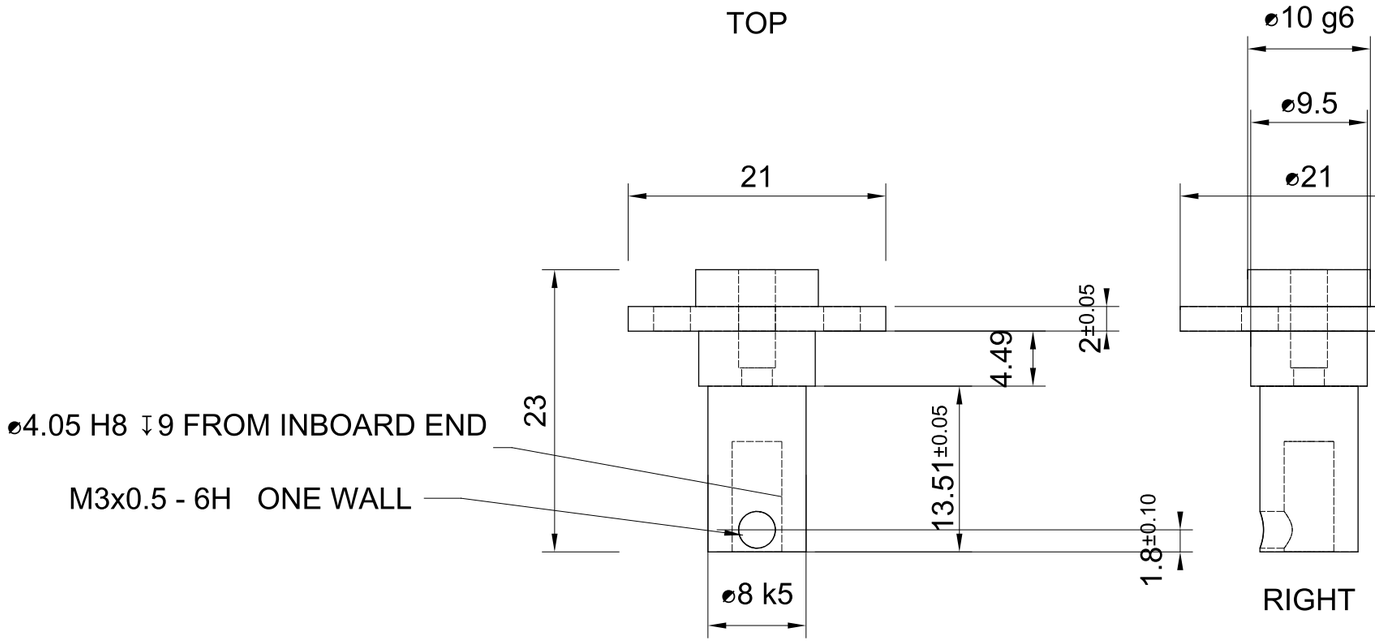

FRONT

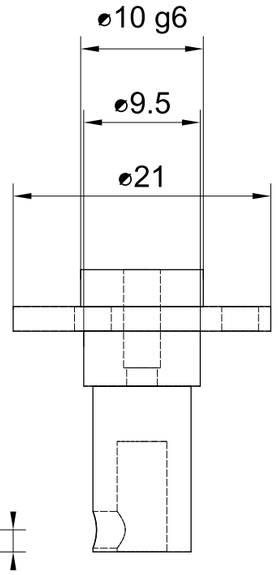

RIGHT

NOTES:
1. TOLERANCES PER ISO 2768-m UNLESS OTHERWISE SPECIFIED.
2. QTY 3 (2 + 1 SPARE). AS TURNED, NO PLATING, LIGHT OIL.
3. DIA 8 k5 = 8.001/8.007, DIA 10 g6 = 9.986/9.995, DIA 4.05 H8 = 4.050/4.068.
4. TURN DIA 8, DIA 10 AND THE DIA 4.05 BORE IN ONE SETUP: CONCENTRIC WITHIN 0.02.
5. SHOULDER FACE (13.51) AND BOTH FLANGE FACES SQUARE TO THE AXIS WITHIN 0.02.
6. SHOULDER CORNER SHARP OR UNDERCUT, NO FILLET OVER R0.15: BEARINGS SEAT ON IT.
7. CHAMFER INBOARD END 0.3 x 45 DEG (BEARING LEAD-IN). BREAK OTHER EDGES 0.2.
8. RADIAL M3: ONE WALL ONLY, INTO THE BORE; DRILL DIA 2.5. ANGLE TO FLANGE HOLES FREE.
9. SPIGOT END M3: THREAD 8 DEEP, DRILL DIA 2.5 x 9.5 DEEP. MASS ABOUT 13 g.

AXLE STUB	SCALE 2:1 MM THIRD ANGLE
CH-012 · EN8 (080M40) OR C45 STEEL · MAKAD	SHEET 1 OF 1 REV A stub_drawing