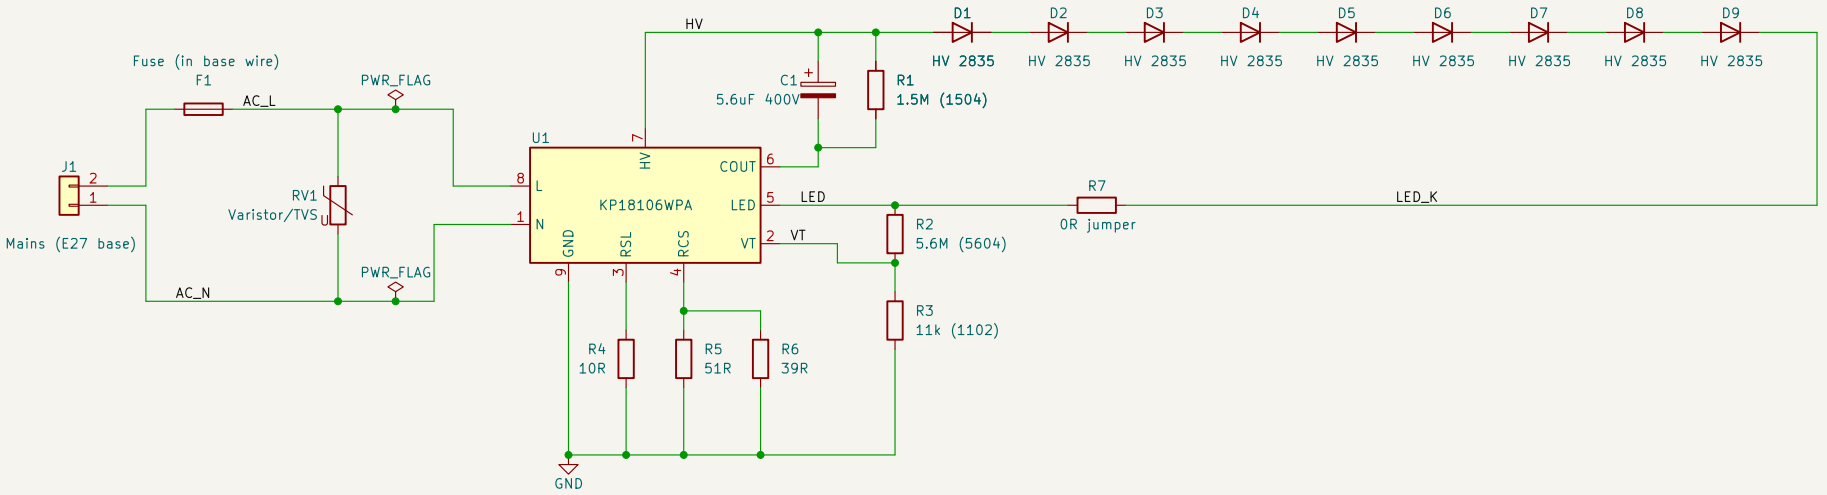


Philips LED bulb — reverse engineered (PCB KT-G22366, 9X2835/9S1P)

U1 KP18106WPA: linear CC driver with integrated 800V bridge. Pin 9 = exposed GND pad.

I_LED = 0.6 V / (R5 || R6) = 0.6 / 22 ohm = ~27 mA I_charge(C1) = 0.6 V / R4 = ~60 mA

VT divider R2/R3 (5.6M / 11k) senses LED-pin voltage. R7 0R jumper crosses GND trace on the single-sided PCB.

F1 and C1 are off-board (in the E27 base). C1: Yunxing CD11-H 5.6uF 400V 105C.

Reverse engineered from PCB KT-G22366

Sheet: /
File: philips_led_bulb.kicad_sch

Title: Philips LED bulb driver (KP18106WPA)

Size: A4	Date:	Rev:
KiCad E.D.A. 10.0.3		Id: 1/1