Does a Draining Battery Shorten or Extend a Metal Detector's Range?

Theory, pre-registered predictions and experimental design for an induction metal detector

Version 1.2 · measurements pending

Kunaal Nirmal Khanwani

Grade XII, Jamnabai Narsee School, Mumbai

Voluntary ISC Physics project

October 2026

Predictions, decision rules and trial order were committed publicly before any measurement was taken.

`github.com/Kunz5/induction-range-voltage`

Contents

1. Introduction **1**

2. Theory **2**
2.1 The detector 2
2.2 The coil's field at the target 2
2.3 Eddy currents in the target 2
2.4 Why the coupling appears twice 3
2.5 Supply voltage in the signal 3
2.6 The alarm condition — supply voltage enters a second time 3
2.7 One expression for all four hypotheses 4
2.8 Linearisation 4

3. Hypotheses and pre-registered predictions **4**

4. Apparatus **5**

5. Method **6**

6. Uncertainty analysis **7**

7. Simulated demonstration of the analysis **8**

8. Limitations **8**

9. Planned measurement and further work **9**

Acknowledgement **9**

References **9**

Abstract.
Battery-powered induction metal detectors lose supply voltage as their batteries discharge, yet how this changes their detection range is rarely stated. A textbook model, in which a received signal is compared with a fixed threshold, predicts that range falls slowly, as the sixth root of supply voltage. This paper shows that the answer depends on how the alarm threshold itself scales with supply, and that for the oscillator-damping detector used on my rover the prediction reverses: range should *increase* as the battery drains, until the detector alarms with no metal present at a characteristic voltage V^*. Starting from Faraday's law and the reciprocity of mutual inductance, I derive a single expression for the sensitivity of range to supply voltage that covers four hypotheses — ratiometric (H0), fixed-threshold far-field (H1), fixed-threshold near-field (H2) and oscillator-margin (H3) — and a linearisation in which one graph distinguishes them by the sign of its slope. The predictions, decision rules, exclusion rules and a randomised trial order were committed publicly before any measurement. The apparatus, a microcontroller latch that removes human reaction time from the trigger, and a full uncertainty budget are described. A clearly labelled simulation demonstrates the analysis. Experimental results are pending and will be reported in Version 2.

1. Introduction

In June 2025, at the IIT Bombay Makerspace, I built MineRoverX [6], an autonomous rover that sweeps a metal detector across the ground for landmine detection. The detector module had no data output — it signalled only by sounding a buzzer — so I soldered a connection from the buzzer into the rover's microcontroller. While documenting the rover, I noted that

the detector needed recalibrating "for different battery voltages". I had built a machine whose ability to find metal changed while it was running, and I did not know by how much, or even in which direction.

That question is not specific to my rover. Handheld detectors used in humanitarian demining, utility location and inspection are almost all battery powered, and the supply falls throughout a session. If range changes with voltage, a detector that clears ground with a fresh battery may not clear it with a tired one — or may begin to false-alarm.

The textbook expectation is simple. The detection signal scales with supply voltage and falls as the sixth power of distance, so, against a fixed threshold, the maximum range should scale as $V^{1/6}$: a 24 % drop in voltage would cost only about 4–5 % of range. This paper argues that this is incomplete. Supply voltage enters a detector twice — once in the strength of the signal and once in the level at which the alarm fires — and which of these dominates decides not only the size of the effect but its sign.

The contributions of this version are: (i) a derivation that unifies four competing hypotheses in one expression; (ii) numerical predictions for my apparatus, committed publicly before data; (iii) an experimental design that measures trigger *voltage* at fixed distance, in which voltage is read about 30× more finely than distance, though distance error still enters through g^2 and is controlled with calipered spacers; and (iv) an uncertainty analysis. Measurements will be reported in Version 2.

2. Theory

2.1 The detector

The module is a commercial induction metal detector, silkscreened `MetalDetector_V2.3 (303METALDET)` and matched by eye to the ProtoSupplies MOD-43 with a square spiral coil printed on the circuit board. Its schematic [4] shows a transformer-feedback, tuned-collector oscillator running at roughly 300 kHz: the tank $L_1 \parallel C_3$ sits at the transistor's collector, and a coupled second winding L_2 feeds part of the tank voltage back to the base. The oscillation amplitude holds an alarm transistor off; when metal near the coil absorbs energy, the amplitude falls, the alarm transistor switches on, and the buzzer sounds. A trimmer potentiometer, R3, sets the sensitivity.

2.2 The coil's field at the target

Treating the coil as a single circular loop of radius a carrying current I, the Biot–Savart law [1] gives the field on its axis at distance d:

$$B(d) = \frac{\mu_0 I a^2}{2\,(a^2 + d^2)^{3/2}} = \frac{\mu_0 I}{2}\, g(d), \qquad g(d) = \frac{a^2}{(a^2 + d^2)^{3/2}}.$$

Far from the coil ($d \gg a$) this reduces to the dipole field, proportional to $1/d^3$. My detector works at distances comparable to the coil's size, so the exact form is kept throughout.

2.3 Eddy currents in the target

The coil current alternates at angular frequency ω, so by Faraday's law [1, 3] the target experiences an EMF $\mathcal{E} = -\,d\Phi/dt$ of magnitude $\omega B A_t$, where A_t is the effective area of its current path. This drives eddy currents, whose magnetic moment is proportional to B at every step: the EMF is proportional to the rate of change of flux, the current to the EMF, and the moment to the current. By Lenz's law [2, 3], the eddy currents oppose the change that produced them.

2.4 Why the coupling appears twice

The detector does not sense the target directly; it senses the target's effect on its own coil. The coupling from coil to target is a mutual inductance $M \propto g(d)$. The return coupling — from the target's eddy currents back to the coil — is the *same* M, because mutual inductance is symmetric ($M_{12} = M_{21}$; Neumann's formula [1] is unchanged when the two loops are swapped). The target therefore reflects an impedance proportional to $\omega^2 M^2$ into the coil, which appears as extra loss. The detection signal scales as

$$S \propto g(d)^2 \cdot I.$$

This argument holds at every distance on the axis, near or far; in the far field it recovers the familiar $1/d^6$ law.

2.5 Supply voltage in the signal

A self-limiting oscillator grows until its transistor runs out of headroom, so its amplitude — and the coil current — is approximately proportional to the supply: $I \approx kV$, giving $S = \kappa V g(d)^2$. This is an assumption, not a law: it fails near the oscillator's start-up voltage and below it, and drifts if coil resistance changes with temperature.

2.6 The alarm condition — supply voltage enters a second time

The alarm fires when the signal exceeds a margin $T(V)$. Three physically distinct cases arise:

Case	Margin $T(V)$	Typical circuit	Hypothesis
Fixed	T_0	absolute threshold on a received signal	H1, H2
Ratiometric	βV	threshold from a divider across the supply	H0
Oscillator margin	$cV - V_{BE}$	amplitude must fall to a transistor's fixed turn-on voltage	H3

In this module the alarm transistor's switching point is partly set by a divider through R3 (proportional to supply) and partly by its base–emitter voltage $V_{BE} \approx 0.6$ V (fixed). Writing the oscillator amplitude as αV, the loss caused by the target as a fraction βg^2 of it, and the switching point as $\gamma V + V_0$, the alarm fires when

$$\alpha V \, (1 - \beta g^2) \leq \gamma V + V_0,$$

which rearranges to

$$V_{\text{trig}}(d) = \frac{V^*}{1 - K g(d)^2}, \qquad V^* = \frac{V_0}{\alpha - \gamma}, \qquad K = \frac{\alpha\beta}{\alpha - \gamma}.$$

V^* has a direct physical meaning: at $V = V^*$ the oscillation with *no target present* already sits at the switching point, so the alarm sounds on its own. The vendor's warning that, if the sensitivity is set too high, "the buzzer will sound continuously" is this effect reached by turning R3 rather than by lowering the supply. V^* can therefore be measured with no target at all.

2.7 One expression for all four hypotheses

Define the local coupling exponent

$$n_{\text{eff}} = -\frac{d\ln g^2}{d\ln d} = \frac{6d^2}{a^2+d^2},$$

which equals 6 in the far field and falls towards zero near the coil. Differentiating the threshold condition $g\,(d_{\text{max}})^2 = T(V)/\kappa V$ gives the sensitivity of range to supply:

$$s \equiv \frac{d\ln d_{\text{max}}}{d\ln V} = \frac{1 - VT'/T}{n_{\text{eff}}}.$$

Only VT'/T differs between the cases:

- **Fixed margin:** $s = 1/n_{\text{eff}} > 0$ — range falls as the battery drains (1/6 in the far field, H1; larger near the coil, H2).
- **Ratiometric:** $s = 0$ — range is independent of supply (H0).
- **Oscillator margin:** $VT'/T = V/(V - V^*) > 1$, so $s = -\frac{V^*/(V-V^*)}{n_{\text{eff}}} < 0$ — range *increases* as the battery drains (H3).

The sign of s classifies the detector before any detailed fitting.

2.8 Linearisation

For H3, the trigger condition can be rearranged into a straight line:

$$g(d)^2 = \frac{1}{K} - \frac{V^*}{K}\cdot\frac{1}{V_{\text{trig}}}.$$

A graph of $g(d)^2$ against $1/V_{\text{trig}}$ is therefore a straight line with **negative slope** $-V^*/K$, y-intercept $1/K$ and x-intercept $1/V^*$. For a fixed-threshold detector the alarm switches *off* as the supply falls, at $V_{\text{off}} \propto 1/g^2$, giving a line through the origin with **positive slope**. For a ratiometric detector the alarm does not change state during the sweep at all. The x-intercept of the H3 fit provides an independent estimate of V^* that can be checked against the value measured directly with no target.

3. Hypotheses and pre-registered predictions

The predictions below were committed to a public GitHub repository before any measurement; the commit history is the evidence of their timing.

Primary hypothesis: H3, on circuit grounds — the alarm is a transistor switched by oscillator amplitude, and a transistor's turn-on voltage does not scale with supply. **Main competitor: H0** — if the fixed term is small, H3 collapses towards H0. H1 and H2 are retained as the textbook expectation.

Worked example at this apparatus's geometry ($a = 17.5$ mm measured; nominal range $d \approx 50$ mm recalled), for a single lithium-ion cell discharging from 4.2 V to 3.2 V:

Hypothesis	Predicted change in d_{max}, 4.2 → 3.2 V
H0	0 %
H1	−4.4 %
H2	−5.0 %

Hypothesis	Predicted change in $d_{\max}$, 4.2 → 3.2 V
H3, $V^* = 2.0$ V	+6.4 %
H3, $V^* = 2.5$ V	+12.1 %
H3, $V^* = 2.8$ V	+19.8 %

Note added 15 October 2026. The recalled range of about 50 mm is contradicted by the pilot, in which the coin produced no alarm at 20 mm at 5.00 V; the true range at 5.00 V is therefore shorter than 20 mm and will be re-measured before Block 1. The table above is computed at the recalled 50 mm and is left unchanged, because `theory/predictions.md` was frozen before any measurement was taken. It stands as an illustration that the hypotheses are numerically separable, not as a prediction for the true geometry. The slopes and the n_{eff} table below do not depend on this figure.

This table demonstrates that the hypotheses are numerically separable at this geometry; H3 depends on V^*, which is measured, so the three H3 rows bracket plausible cases rather than predicting one value.

Local exponent at the measurement distances ($a = 17.5 \pm 1$ mm):

d (mm)	10	12	15	20	25	30	35	40
n_{eff}	1.48	1.92	2.54	3.40	4.03	4.48	4.80	5.04

Decision rules (fixed in advance). With the fitted exponent s and its standard error σ: H0 if $|s| < 2\sigma$; H3 if $s < -2\sigma$ *and* the fitted V^* agrees with the no-target V^* within combined uncertainty; H1 if $s > 2\sigma$ and within 2σ of $1/6$ but not of $1/n_{\text{eff}}$; H2 if within 2σ of $1/n_{\text{eff}}$. Any other outcome is reported as a failure of all four models.

What would falsify each. H0: range changes by more than its uncertainty between 4.2 and 3.2 V. H1/H2: range does not fall as voltage falls. H3: range does not rise as voltage falls; or no spontaneous alarm occurs above the oscillator's dropout; or the directly measured V^* disagrees with the fitted one.

4. Apparatus

Item	Specification	Source
Detector module	Induction detector, MOD-43 type; transformer-feedback tuned-collector oscillator, ≈300 kHz; rated 3.0–5.0 V	vendor documentation and schematic
Coil	Square printed spiral; outer 50 mm, inner 20 mm across the flats, both axes	measured, ruler (1 mm)
Effective radius a	17.5 mm by the pre-registered definition (outer + inner)/4; 19.7 mm equal-area circle, used only as a sensitivity check	computed

Item	Specification	Source
Target	2020 ₹1 coin (2019 series): ferritic stainless steel (83 % Fe, 17 % Cr), 20 mm diameter, 3.09 g; attracted by a magnet	official specification [5]; diameter and magnetism checked
Supply	School battery eliminator (Jainco, stepped), 6 V tap, with a laboratory rheostat in series for fine control	laboratory equipment
Voltmeter	DT830-series 3½-digit digital multimeter, 20 V DC range, 0.01 V resolution; accuracy not stated on the case (series typical $\pm$(0.5 % + 2 digits)); probes on the module's own supply pins	—
Trigger latch	ESP32 microcontroller reading the alarm transistor's collector through a 10 kΩ / 15 kΩ divider on GPIO 34; firmware threshold 450 mV; detection confirmed after 50 ms continuous	firmware in repository
Modifications	Buzzer disconnected for the main run; 10 kΩ pull-down role taken by the divider; sensitivity trimmer R3 **to be fixed with a witness mark before Block 1**	recorded
Spacers	Non-metallic, thickness to be measured with a vernier caliper (0.1 mm)	**not yet acquired — the only instrument recorded so far is a 1 mm ruler**
Environment	Room temperature by thermometer at the start and end of each block	—

The latch replaces human judgement of "has it triggered?" — otherwise the largest source of error — and records two instants per trial (first active sample and confirmation), whose separation measures the chatter at the trigger point. Near V^* the H3 model predicts this chatter should widen, giving a second, independent signature of H3.

5. Method

1. **Measure the range at 5.00 V.** Bring the coin slowly towards the coil at the full supply and record the greatest distance at which the alarm sounds. Distances inside that range may show no change of state during a sweep, which the protocol amendment of 15 October records as an outcome in its own right.
2. **No-target sweep.** With no metal within 30 cm of the coil, set the supply to 5.00 V and

lower it in 0.01 V steps. Record the voltage at which the latch fires on its own (V^*), or record "none" and the lowest voltage reached.

3. **Primary measurement — voltage at change of state, at fixed distance.** Place the coin flat and centred on non-metallic spacers at the specified distance. Starting at 5.00 V, lower the supply in 0.01 V steps and record the meter reading at the first change in alarm state, together with its direction (off → on, or on → off). If the alarm does not change state between 5.00 V and the oscillator's dropout, record that outcome; it is itself evidence (H0, or a distance outside the range of the sweep).
4. **Distances:** 10, 12, 15, 20, 25, 30, 35 and 40 mm, five repeats each (40 trials), in a pre-registered randomised order (seed 20261014) arranged in four blocks of ten, with no distance repeated consecutively. Each block is bracketed by no-target sweeps to monitor drift.
5. **Secondary measurement:** at 5.0, 4.2, 3.6 and 3.2 V, move the coin slowly towards the coil and record the distance at first alarm (three repeats each, randomised). This is the quantity a user of the detector experiences, measured by an independent route with independent errors.
6. **Recording:** every reading is logged at the moment it occurs. Raw values are never edited; corrections go in a notes column.

Pre-registered exclusion rule. A trial may be excluded only for a reason recorded before its value is read: the supply voltage was not recorded or drifted by more than 0.02 V; the target was moved or found off-axis; metal came within 30 cm of the coil; the module had been powered for less than 60 s; or the trial was out of the randomised order. No trial is excluded because of its value, and the analysis is reported with and without exclusions.

6. Uncertainty analysis

Distance. Since $g^2 = a^4/\left(a^2+d^2\right)^3$, a distance error δd produces a fractional error

$$\frac{\delta\left(g^2\right)}{g^2} = \frac{6d\,\delta d}{a^2+d^2} = n_{\text{eff}}\,\frac{\delta d}{d},$$

which is largest at $d = a$. With $a = 17.5$ mm and $\delta d = 1$ mm, it is 14.8 % at 10 mm, peaks at 17.1 % at 17.5 mm, and is 12.6 % at 40 mm. The budget is nearly flat across the measurement range. With spacers measured to 0.1 mm the coupling error falls to about 1.3–1.7 %, which is why calipered spacers matter more than a finer voltmeter. The board's thickness (≈1.6 mm) makes "distance from the coil plane" ambiguous by up to 0.8 mm; distances are measured from the coil face with fixed spacers.

Voltage. The meter resolves 0.01 V, but its absolute accuracy is coarser — about ±0.04 V at 3.5 V for this meter type. Resolution and random reading error scatter individual points. A calibration error does not simply shift every point equally once the data are plotted against $1/V$: a gain error rescales the axis, and an offset becomes a non-uniform shift in $1/V$, so both can bias the fitted slope and intercept. The direct comparison of the measured and fitted V^* — made with the same meter — is partly protected against this, since a common error moves both.

Trigger step. The true change of state lies somewhere within the last 0.01 V step: ±0.005 V.

Temperature. V_{BE} changes by about −2 mV per °C, and $V^* = V_0/(\alpha-\gamma)$ amplifies this if $\alpha - \gamma$ is small. Temperature is recorded at each block, and the bracketing no-target sweeps detect drift directly.

Supply ripple. An unsmoothed eliminator carries AC ripple on its DC output. It cannot be

read on the DT830, whose lowest AC range is 200 V and will not resolve tens of millivolts; it is measured instead on the school oscilloscope at the module pins, with a capacitor of about 1000 µF across the module's supply as mitigation.

Load-dependent sag. The series rheostat sets voltage by dropping it across a resistance, so the output moves with load current. Lifting the buzzer removes the ≈23 mA step that the alarm would otherwise draw at the moment of triggering, leaving the divider's 0.2 mA, so the remaining current change — and the sag it causes — is small.

7. Simulated demonstration of the analysis

Everything in this section is simulated. The parameters are illustrative and were chosen only to make the shapes visible; none of it is a measurement of the apparatus.

The script `analysis/simulate_demo.py` generates synthetic sweep results at the pre-registered distances for three illustrative detectors, adds reading noise of 0.01 V, rounds to the meter's two decimal places, and applies the linearisation of Section 2.8.

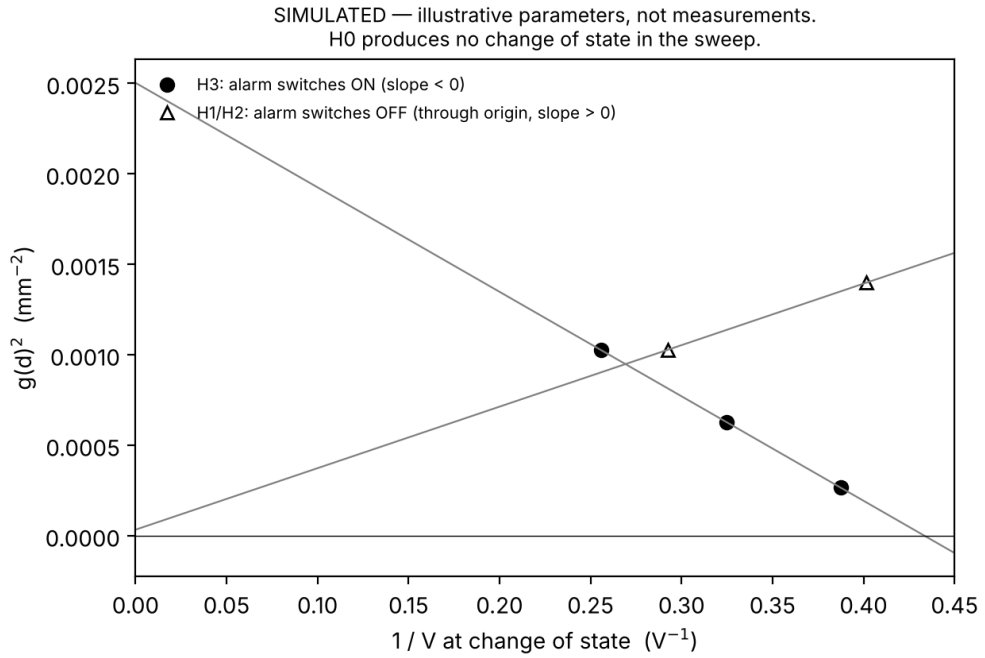


Figure 1: SIMULATED — the H3 detector (filled circles) gives a line of negative slope whose x-intercept recovers the V* used to generate it; the fixed-threshold detector (open triangles) gives a line through the origin with positive slope; the ratiometric detector produces no change of state and therefore no points.

Two features of the simulation inform the real experiment. First, the fit recovers the parameters used to generate the H3 data, confirming that the analysis pipeline works; it does *not* show that a real detector follows H3, because the data were generated from that model. Second, depending on R3's setting, only some distances may change state inside the 5.0 V sweep; the others will record "no change of state", and the method treats that as an outcome rather than a missing value.

8. Limitations

- **Coil shape.** The model treats a square spiral as a single circular loop. The pre-registered $a = 17.5$ mm is the inscribed radius of the mean square, $(\text{outer} + \text{inner})/4$; results will also be reported with the equal-area radius of 19.7 mm to show how much the approxi-

mation matters.

- **Target size and material.** The 20 mm coin is comparable in size to the coil, not small as the model assumes, and its ferritic steel adds magnetisation to the eddy-current response.
- **Threshold structure.** The split of the alarm margin into supply-proportional and fixed parts is inferred from the circuit's topology; the measurement of V^* tests it.
- **Oscillator linearity.** Amplitude proportional to supply fails near start-up.
- **A modified board.** Results apply to the board as modified: buzzer lifted, with the divider taking the pull-down role. Whether the modification shifts the trigger voltage has not been established — the pilot compared with and without the buzzer but recorded only a summary, so no formal test exists. Twelve paired trials are planned before Block 1.
- **Air, not soil.** Ground mineralisation is outside this study.
- **One module, one target.** Generalising requires further detectors and targets.

9. Planned measurement and further work

Pilot. At 20 mm the alarm appeared at about 3.0 V as the supply fell, over twelve trials recorded only as a summary. The direction — alarm switching *on* as voltage falls — is the one H3 predicts and the opposite of a fixed threshold. It is not evidence until the no-target sweep establishes whether the module alarms on its own at that voltage, in which case the number is V^* and not a detection at all.

Version 2 will report the measurements described in Section 5, analysed exactly as pre-registered, with all raw data in the repository. Further work: (i) a controlled test of R3's role, by changing it only after the main data are complete and re-measuring V^*; (ii) the transient supply sag when the rover's motors accelerate, which this analysis predicts will momentarily change detection range; (iii) a supply-compensated alarm threshold in the rover's firmware, so that sensitivity stays constant as the battery drains; (iv) repetition through soil.

Acknowledgement

An AI assistant was used as a tutor while I worked through the derivation, to draft and edit the text, for repository scaffolding, the fitting and plotting script, and typesetting. I have checked every step, can explain each one, and made the experimental design decisions. No data was generated, estimated or completed by it at any point.

References

1. D. J. Griffiths, *Introduction to Electrodynamics*, 4th ed., Cambridge University Press — Faraday's law, the field of a current loop, mutual inductance and Neumann's formula.
2. H. C. Verma, *Concepts of Physics*, Vol. 2, Bharati Bhawan — electromagnetic induction and eddy currents.
3. NCERT, *Physics Part I, Class XII*, Chapter 6: Electromagnetic Induction.
4. ProtoSupplies, "Metal Detector Module" (MOD-43) product documentation and schematic, protosupplies.com.
5. Government of India, *Coinage of One Rupee, Two Rupees, Five Rupees, Ten Rupees and Twenty Rupees Rules, 2019* — specification of the ₹1 coin.
6. K. N. Khanwani, MineRoverX repository, github.com/Kunz5/mine-rover-x.