


Kegiatan Praktikum Jaringan Komputer

Modul 11

1. Buat Topologi

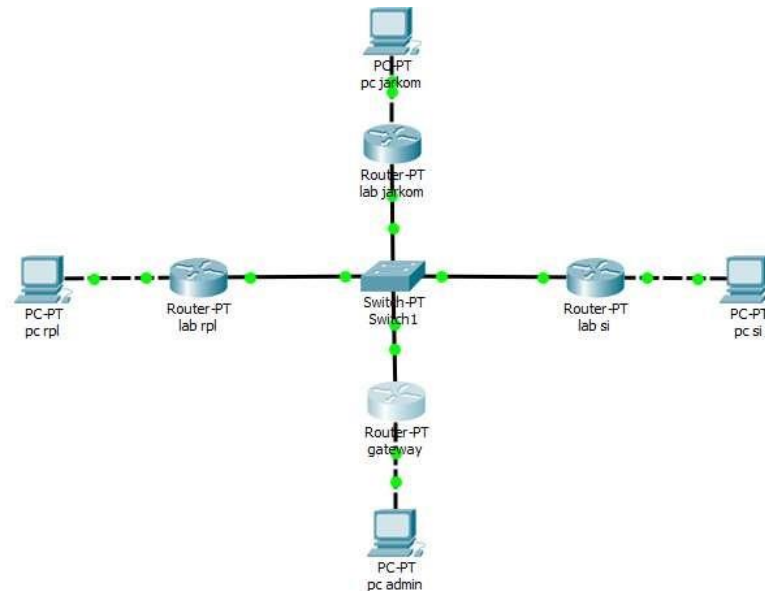

2. Konfigurasi semua router

- Konfigurasi Router 1

```
Router>en
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname jarkom
jarkom(config)#interface fa0/0
jarkom(config-if)#ip address 172.16.0.1 255.255.255.0
jarkom(config-if)#no shutdown

jarkom(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

jarkom(config-if)#exit
jarkom(config)#interface fa1/0
jarkom(config-if)#ip address 172.15.0.1 255.255.255.0
jarkom(config-if)#no shutdown

jarkom(config-if)#
%LINK-5-CHANGED: Interface FastEthernet1/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/0, changed state to up

jarkom(config-if)#exit
jarkom(config)#
```

- Konfigurasi Router 2

```

Router>en
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname SistemInformasi
SistemInformasi(config)#interface fa0/0
SistemInformasi(config-if)#ip address 172.17.0.1 255.255.255.0
SistemInformasi(config-if)#no shutdown

SistemInformasi(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

SistemInformasi(config-if)#exit
SistemInformasi(config)#interface fa1/0
SistemInformasi(config-if)#ip address 172.15.0.2 255.255.255.0
SistemInformasi(config-if)#no shutdown

SistemInformasi(config-if)#
%LINK-5-CHANGED: Interface FastEthernet1/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/0, changed state to up

SistemInformasi(config-if)#exit
SistemInformasi(config)#

```

- Konfigurasi Router 3

```

Router>en
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname RPL
RPL(config)#interface fa0/0
RPL(config-if)#ip address 172.18.0.1 255.255.255.0
RPL(config-if)#no shutdown

RPL(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

RPL(config-if)#exit
RPL(config)#interface fa1/0
RPL(config-if)#ip address 172.15.0.3 255.255.255.0
RPL(config-if)#no shutdown

RPL(config-if)#
%LINK-5-CHANGED: Interface FastEthernet1/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/0, changed state to up

RPL(config-if)#exit
RPL(config)#

```

- Konfigurasi Router 4

```

Router>en
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname UMS
UMS(config)#interface fa0/0
UMS(config-if)#ip address 172.19.0.1 255.255.255.0
UMS(config-if)#no shutdown

UMS(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

UMS(config-if)#exit
UMS(config)#interface fa1/0
UMS(config-if)#ip address 172.15.0.4 255.255.255.0
UMS(config-if)#no shutdown

UMS(config-if)#
%LINK-5-CHANGED: Interface FastEthernet1/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/0, changed state to up

UMS(config-if)#exit
UMS(config)#

```

3. Konfigurasi Routing Table

- **Membuat Routing Table pada Router 1/Jarkom**

```
jarkom(config)#router rip
jarkom(config-router)#network 172.15.0.0
jarkom(config-router)#network 172.16.0.0
jarkom(config-router)#network 172.17.0.0
jarkom(config-router)#network 172.18.0.0
jarkom(config-router)#network 172.19.0.0
jarkom(config-router)#
```

- **Membuat Routing Table pada Router 2/SI**

```
SistemInformasi(config)#router rip
SistemInformasi(config-router)#network 172.15.0.0
SistemInformasi(config-router)#network 172.16.0.0
SistemInformasi(config-router)#network 172.17.0.0
SistemInformasi(config-router)#network 172.18.0.0
SistemInformasi(config-router)#network 172.19.0.0
SistemInformasi(config-router)#exit
SistemInformasi(config)#
```

- **Membuat Routing Table pada Router 3/RPL**


```
RPL(config)#router rip
RPL(config-router)#network 172.15.0.0
RPL(config-router)#network 172.16.0.0
RPL(config-router)#network 172.17.0.0
RPL(config-router)#network 172.18.0.0
RPL(config-router)#network 172.19.0.0
RPL(config-router)#exit
RPL(config)#
```

- **Membuat Routing Table pada Router 4/gateway**


```
UMS(config)#router rip
UMS(config-router)#network 172.15.0.0
UMS(config-router)#network 172.16.0.0
UMS(config-router)#network 172.17.0.0
UMS(config-router)#network 172.18.0.0
UMS(config-router)#network 172.19.0.0
UMS(config-router)#exit
UMS(config)#
```

4. Konfigurasi IP


- Konfigurasi PC Jarkom

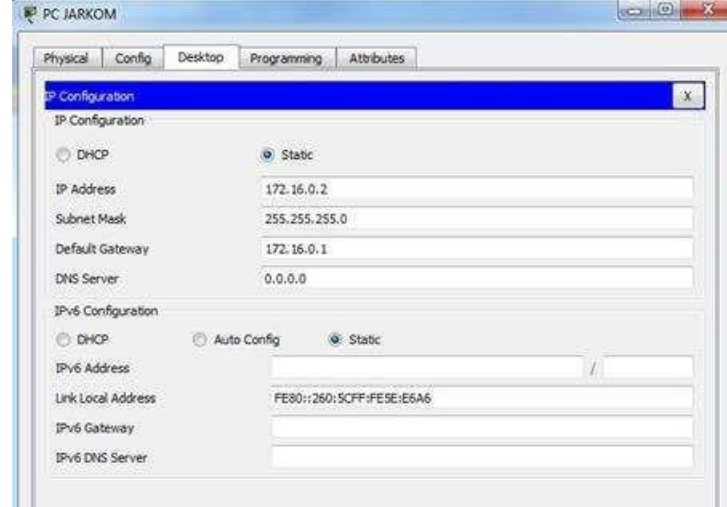


- Konfigurasi PC RPL

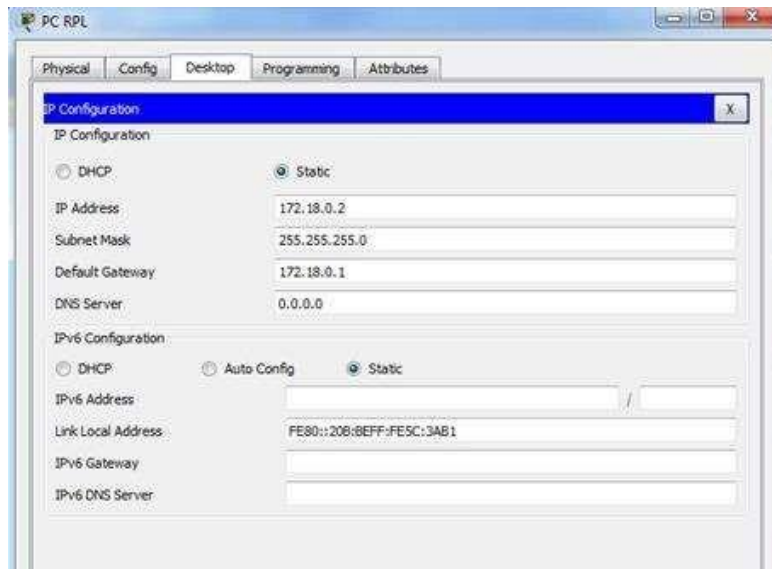

- Konfigurasi PC SI

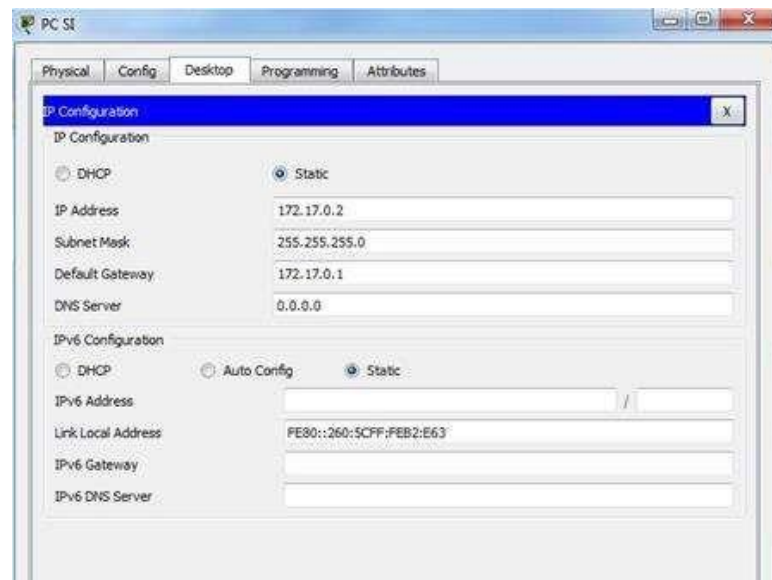

- Konfigurasi PC Gateway

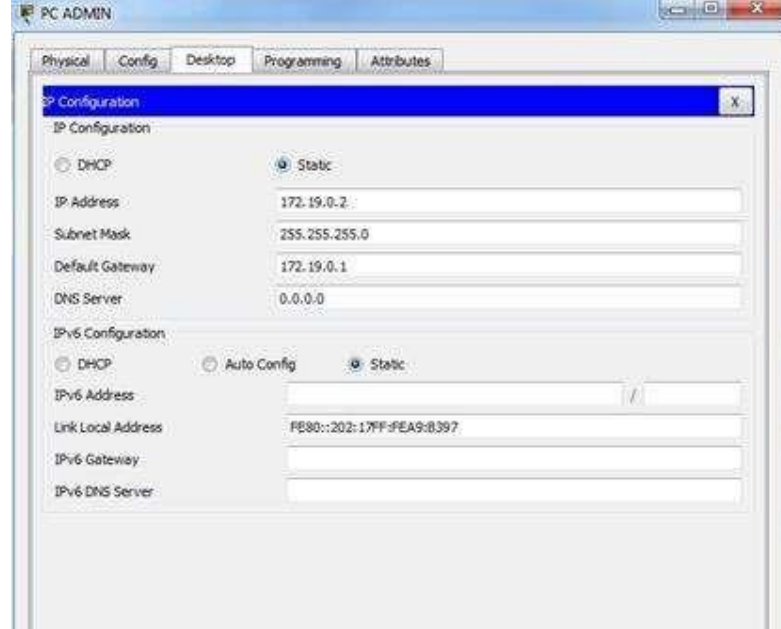

5. Pengujian ICMP request (ping) untuk test koneksi

```
Command Prompt

Pinging 172.16.0.2 with 32 bytes of data:

Reply from 172.16.0.2: bytes=32 time=1ms TTL=126
Reply from 172.16.0.2: bytes=32 time<1ms TTL=126
Reply from 172.16.0.2: bytes=32 time<1ms TTL=126
Reply from 172.16.0.2: bytes=32 time<1ms TTL=126

Ping statistics for 172.16.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 172.17.0.2

Pinging 172.17.0.2 with 32 bytes of data:

Reply from 172.17.0.2: bytes=32 time=1ms TTL=126
Reply from 172.17.0.2: bytes=32 time<1ms TTL=126
Reply from 172.17.0.2: bytes=32 time<1ms TTL=126
Reply from 172.17.0.2: bytes=32 time<1ms TTL=126

Ping statistics for 172.17.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 172.18.0.2

Pinging 172.18.0.2 with 32 bytes of data:

Reply from 172.18.0.2: bytes=32 time=1ms TTL=126
Reply from 172.18.0.2: bytes=32 time=1ms TTL=126
Reply from 172.18.0.2: bytes=32 time<1ms TTL=126
Reply from 172.18.0.2: bytes=32 time<1ms TTL=126

Ping statistics for 172.18.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>|
```