
ESP32-C6 SuperMini - Matrix Clock Wiring Diagram

Timezone ESP32 Matrix Clock | 4x MAX7219 (FC16) 8×32 LED matrix

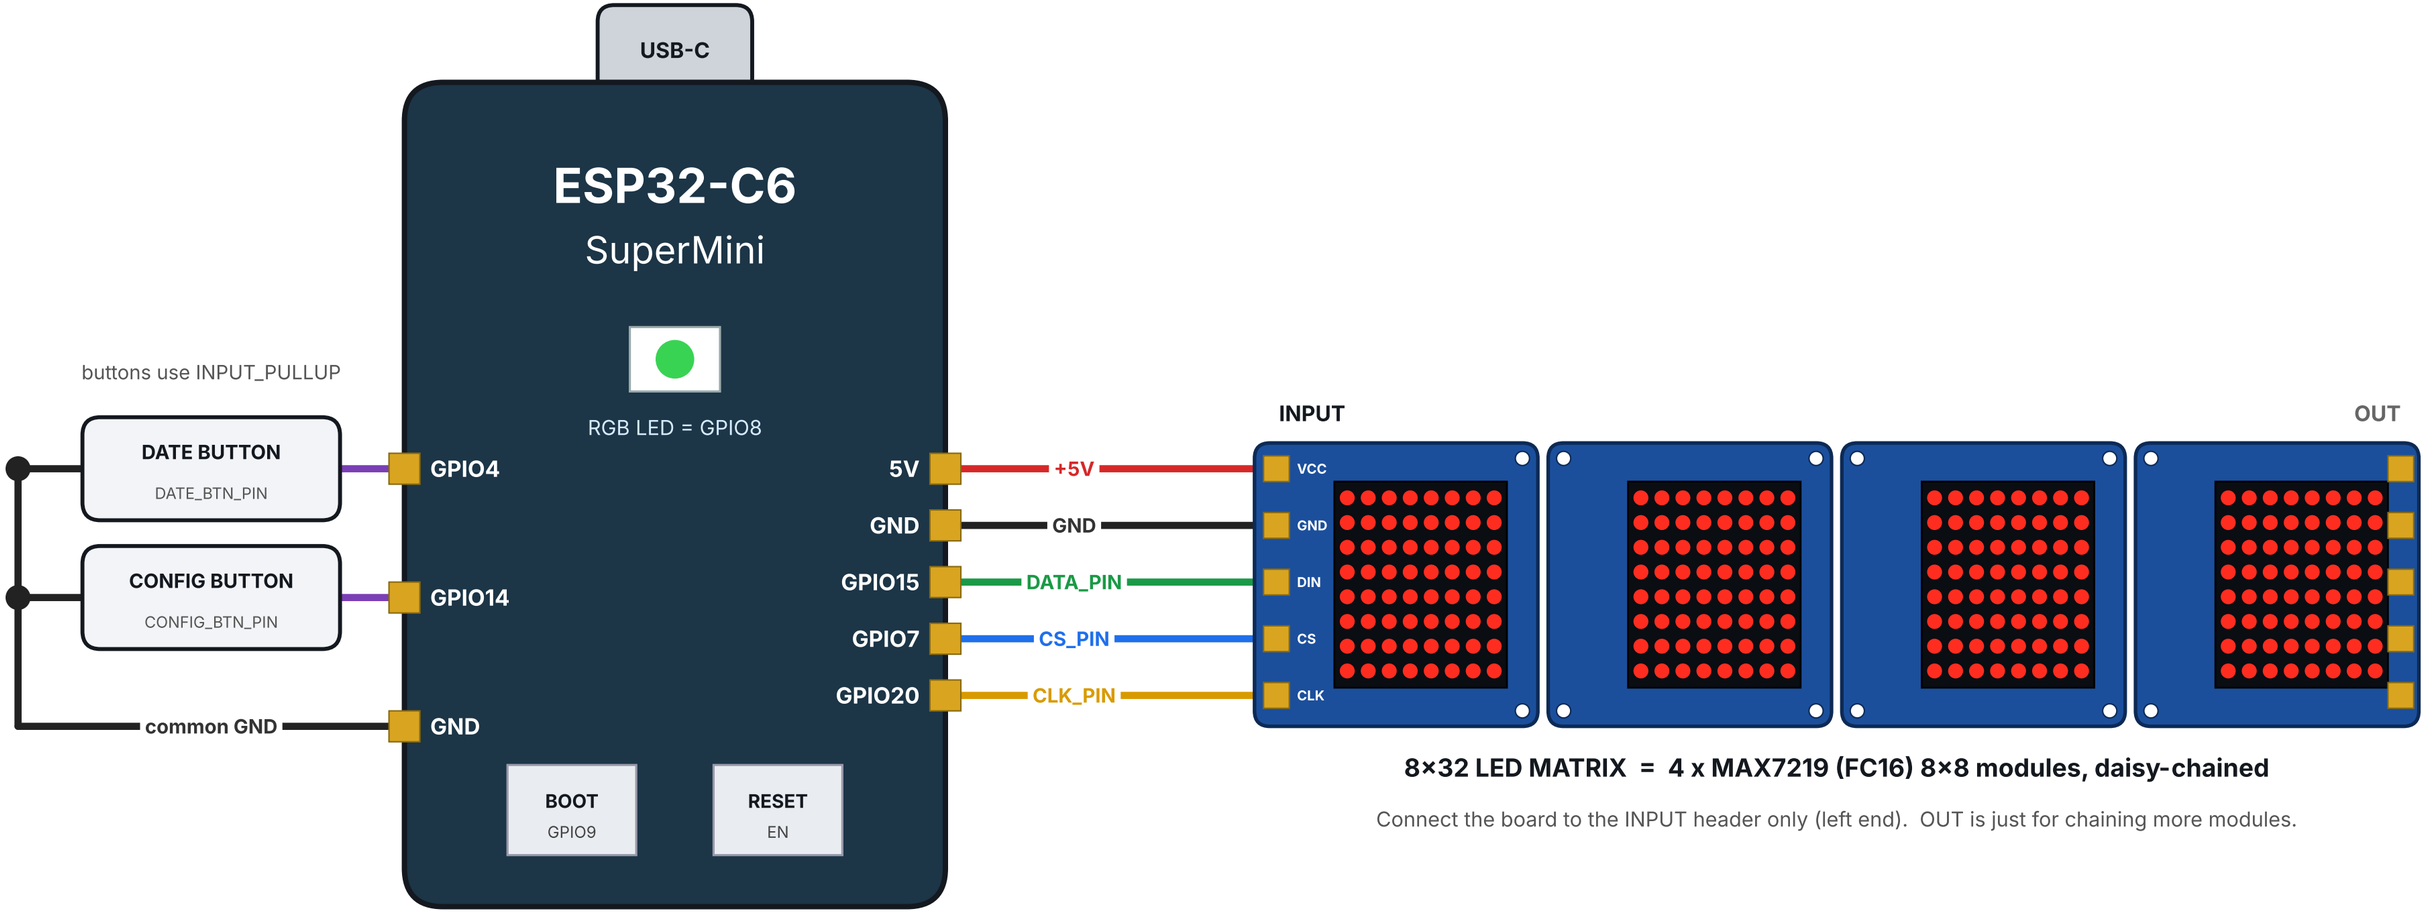

8×32 LED MATRIX = 4 x MAX7219 (FC16) 8×8 modules, daisy-chained

Connect the board to the INPUT header only (left end). OUT is just for chaining more modules.

NOTES

1. Diagram is organised by function, not physical pin order. Match the GPIO numbers to the labels printed on your board.
2. Matrix VCC comes from the board's 5V pin (USB 5V). Board, matrix and buttons share a common ground.
3. GPIO4, 8, 9 and 15 are ESP32-C6 strapping pins. GPIO15 also drives the onboard status LED (may glow faintly). Don't hold the Date button at power-up.
4. Onboard RGB LED (GPIO8) is the status light: green = running, red = syncing, blue = setup mode.