
TASK 2 | OFFICE 1 NORMAL POWER

A3 PORTRAIT | 1:75 at actual size | mm | DB-O1 | COURSE DESIGN

Supply continues to MS-O1 at meter location; incoming route on model / DB schematic.

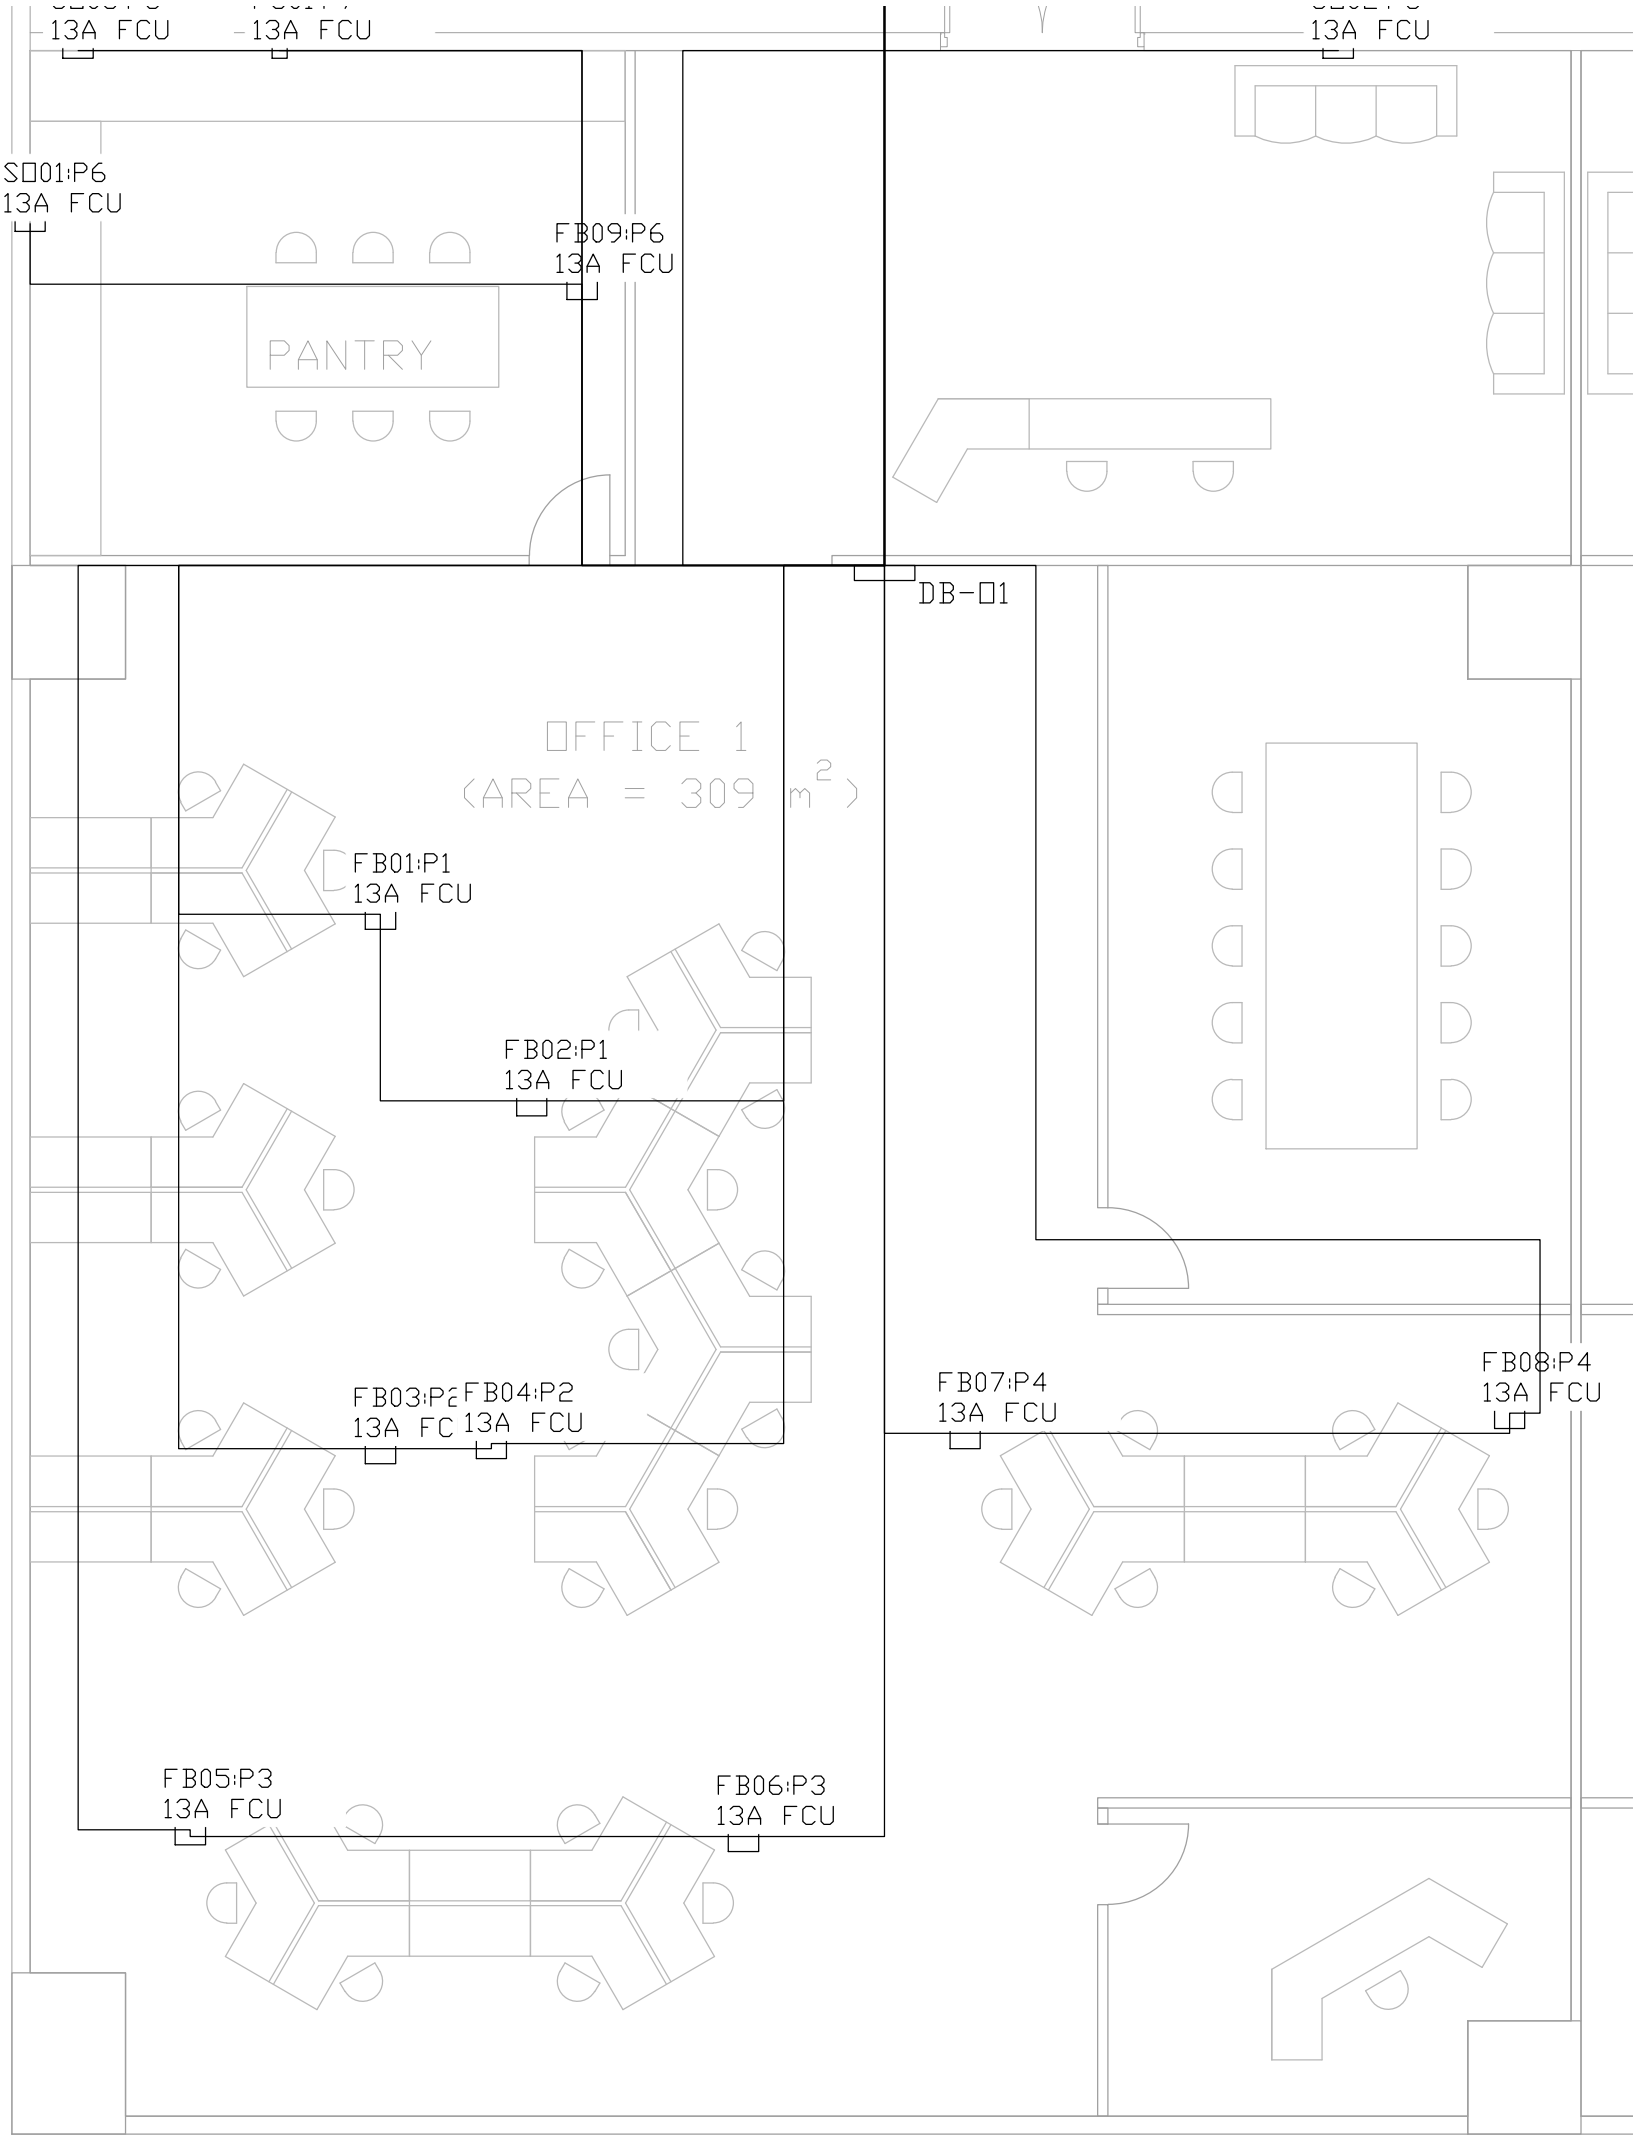

FB01-09=floorbox; SO01-03=twin socket; FS01=dedicated fused spur.

Each point:13A fuse; intended continuous demand<=13A. Local spur4mm2,0.5m allowance.

P1 L1 RING B32 6mm2 28.620m

P2 L1 RING B32 6mm2 35.520m

P3 L2 RING B32 6mm2 45.220m

P4 L2 RING B32 6mm2 34.220m

P5 L1 RADIAL B32 10mm2 15.607m

P6 L3 RADIAL B32 10mm2 13.864m

P7 L3 RADIAL B16 4mm2 13.107m

P8 L3 RADIAL B32 10mm2 15.107m

Ring L/N/CPC both ends return to same circuit. Radial L/N/CPC same stated size.

FB09/SO01/SO03 serve pantry: P6/P8. P7 is reserved equipment capacity, appliance rating unknown.

Containment: rings P1/P2 bank A; P3/P4 bank B; radials P5/P6/P8 bank C; P7 separate.

Individually fused point assemblies and terminals must accept selected conductor size or rated junctions.

Proposed routes follow plan; vertical/tail allowances and conditions are in Task3. Architecture retained as reference.

BSE3124 | 2026-11-07 | Read with15-way DB schematic and common circuit schedule