



零級與一級反應的圖形和半生期互相對應


零級： $[A] = [A]_0 - kt$

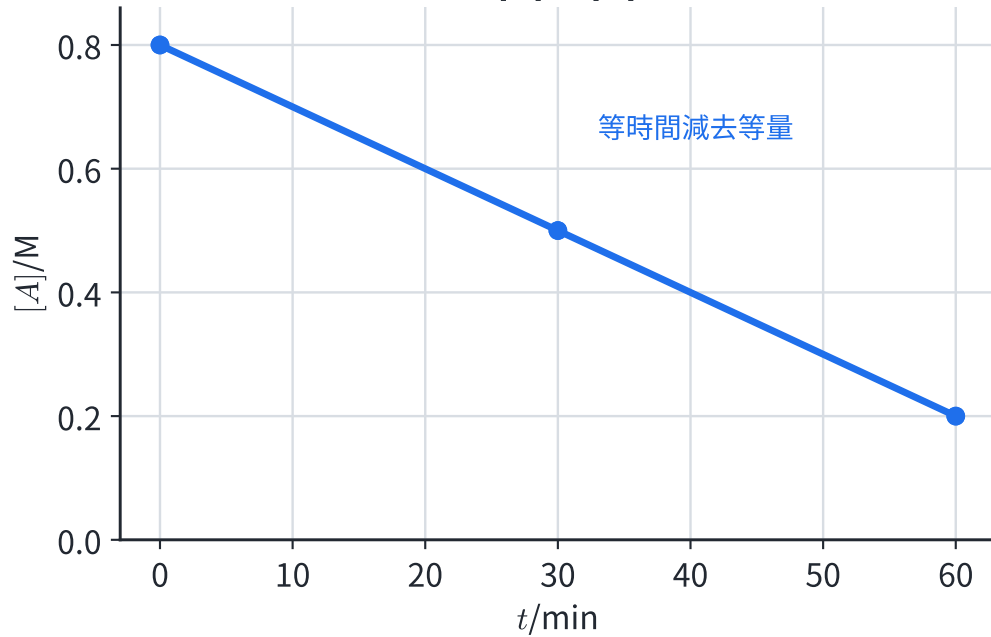

一級： $[A] = [A]_0 e^{-kt}$

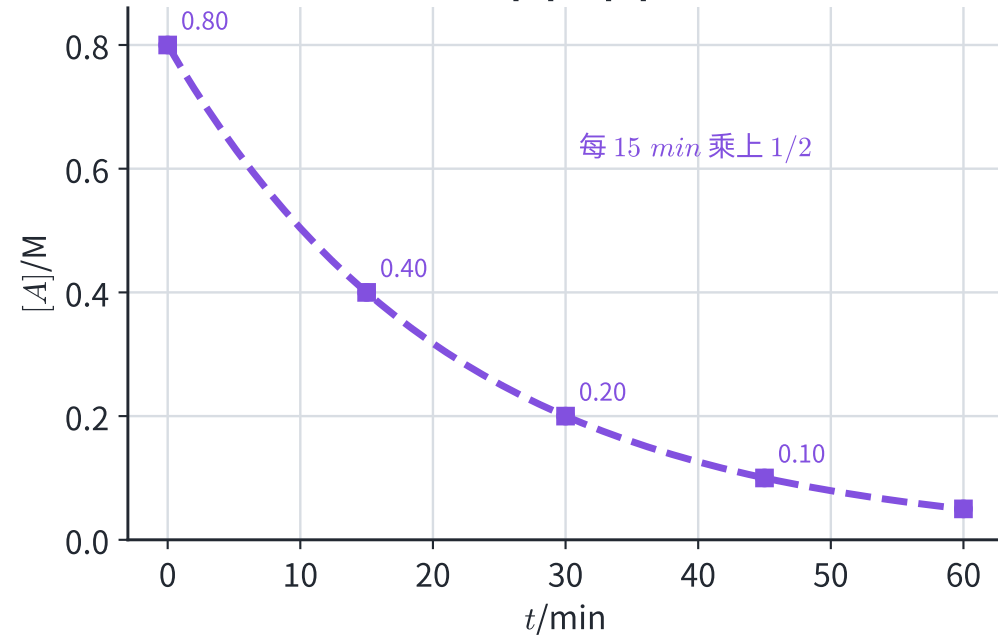

一級線性化： $\ln[A] = \ln[A]_0 - kt$

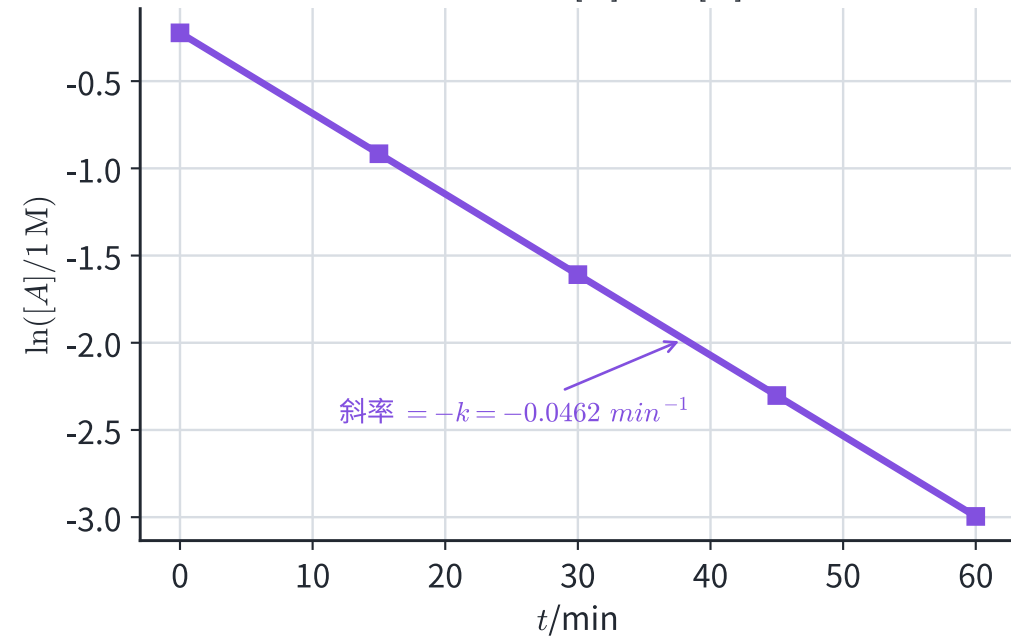

半生期公式須先確認反應級數

零級半生期
 $t_{1/2} = [A]_0 / (2k)$
 隨初濃度改變

一級半生期
 $t_{1/2} = \ln 2 / k = 0.693 / k$
 與初濃度無關

$$N = N_0 (1/2)^{t/t_{1/2}}$$