
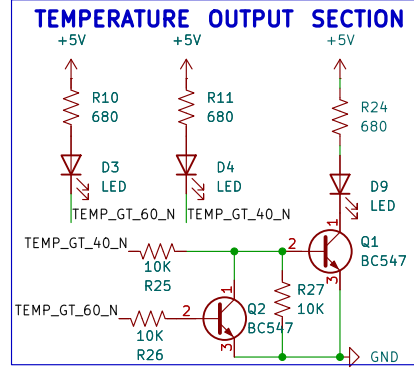
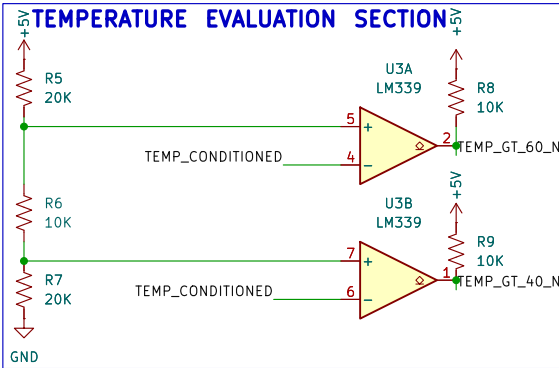


POWER SECTION

The power section circuit includes a +12V input (J1) connected to a 1N5819 diode (D1) and a 100nF capacitor (C1). The diode's cathode is connected to the PWR_FLAG signal line, which also passes through a 10uF capacitor (C3) to ground (PWR_FLAGGND). The diode's anode is connected to the input of an LM7805 TO220 voltage regulator (U1). The regulator's output (+5V) is filtered by a 100nF capacitor (C2) and a 10uF capacitor (C4), and is connected to an LED (D2) in series with a 680 ohm resistor (R1). A separate +5V output is shown, connected to an LM358 op-amp (U2C) and an LM339 comparator (U3E).

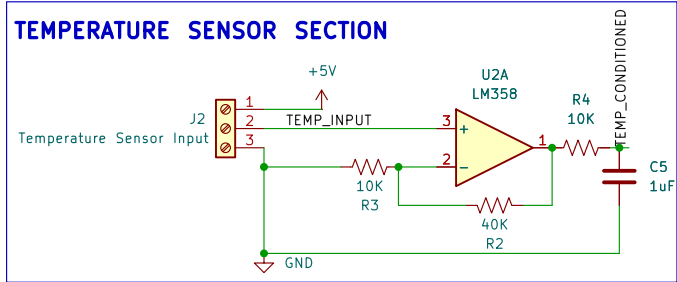




PRESSURE SENSOR SECTION

J4
Pressure input

1 → +5V
2 → R17 10K
3 → GND

1uF C7

PRESSURE - CONDITIONED

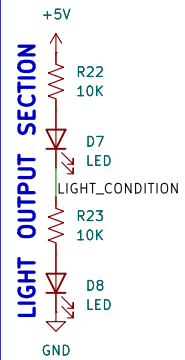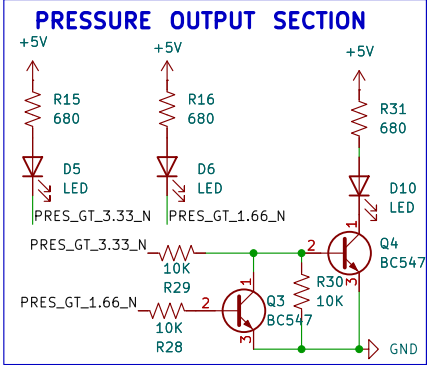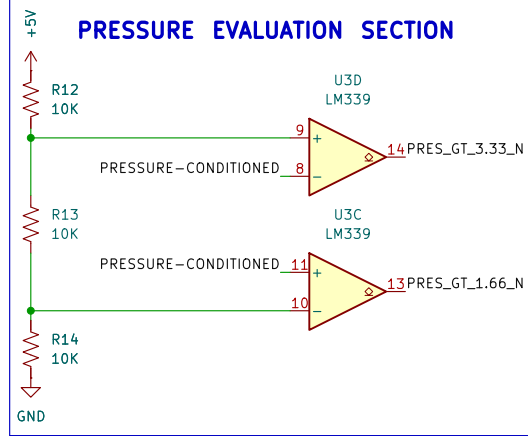

Rev:
Id: 1/1