
M166 · RTO-144 CONNECTIONS

M166 - Active Summing Amplifier · series S400-LINE · 15 contacts, single row


REAR CONNECTOR

REAR VIEW · CARD EDGE · 15 CONTACTS

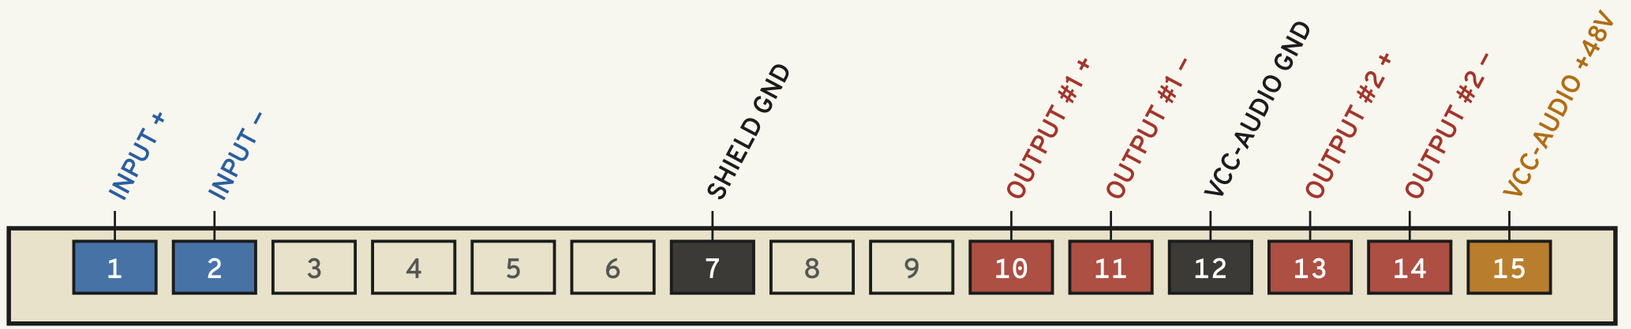

Input Output Power Ground / chassis

INPUTS AND OUTPUTS

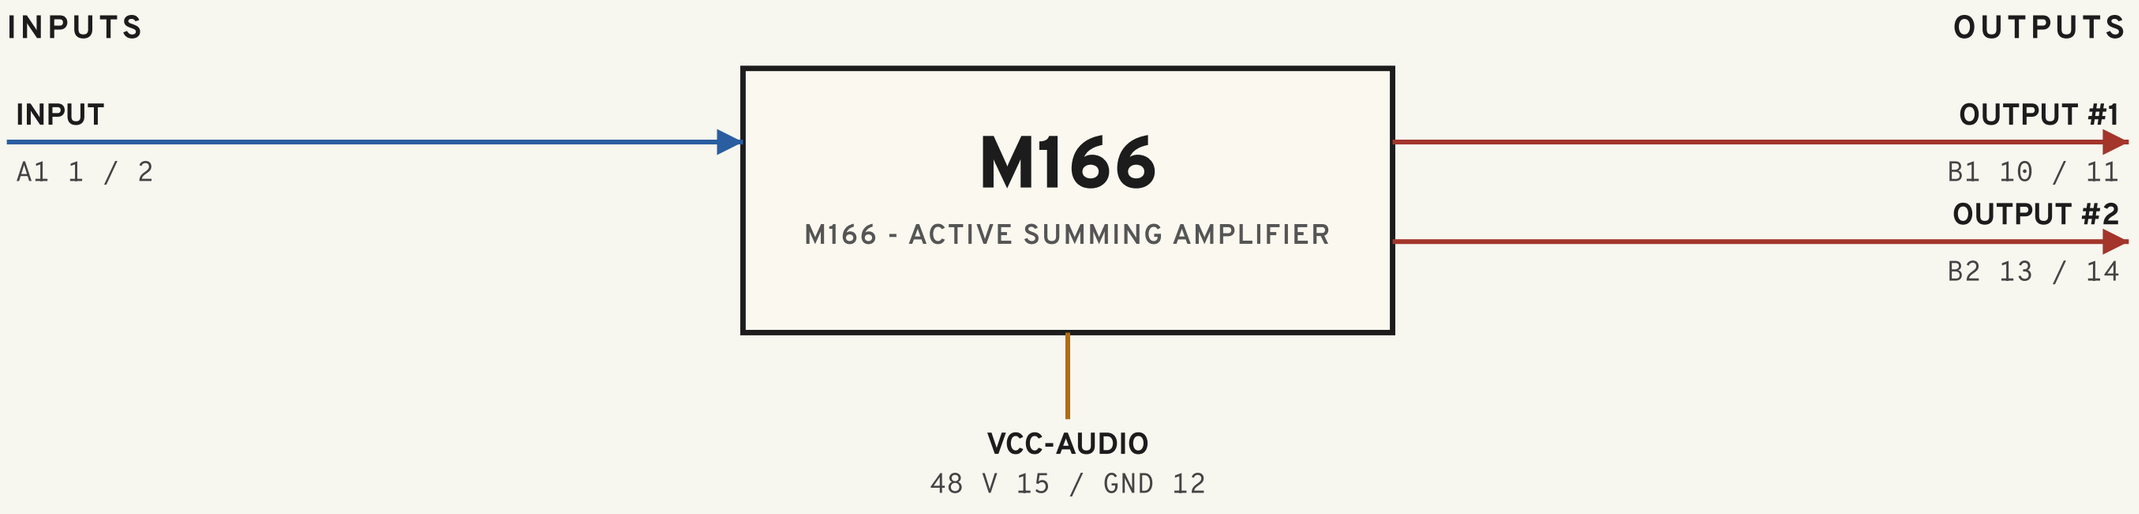

AUDIO CONNECTIONS · RTO-144 A / B

PORT	SIGNAL	DIR	PIN +	PIN −	PAD +	PAD −
A1	INPUT	in	1	2	—	—
B1	OUTPUT #1	out	10	11	—	—
B2	OUTPUT #2	out	13	14	—	—

POWER · BENCH PSU

RAIL	STYLE	VOLTS	MAX A	SUPPLY	GROUND	LINK
VCC-AUDIO	—	48	—	15	12	—

OTHER PINS

SIGNAL	PINS
SHIELD GND	7

Source: Ward-Beck drawing 166-02-002 iss. 2 (Feb 1970), M166 active summing amplifier plug connections. Verify against the module before wiring.

WBS	WARD-BECK SYSTEMS LTD.		
TITLE	M166 RTO-144 CONNECTIONS		
DRN.	MAKE_RTO144.PY	DATE	OCT 22 2026