
M404A · RTO-144 CONNECTIONS

HP LP FILTER · series S400 · out 600 Ω


REAR CONNECTOR

REAR VIEW · CARD EDGE · 22 CONTACTS

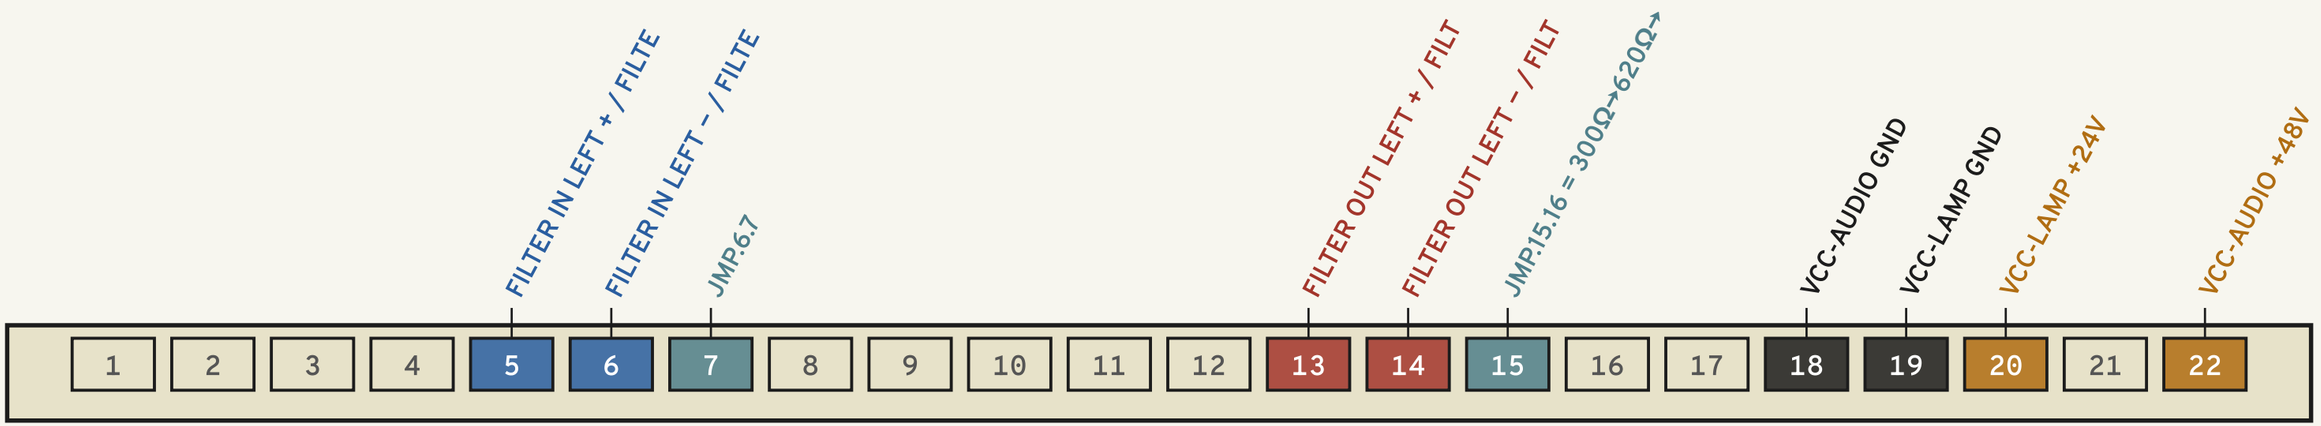

Input · Output · Power · Ground / chassis · Jumper

INPUTS AND OUTPUTS

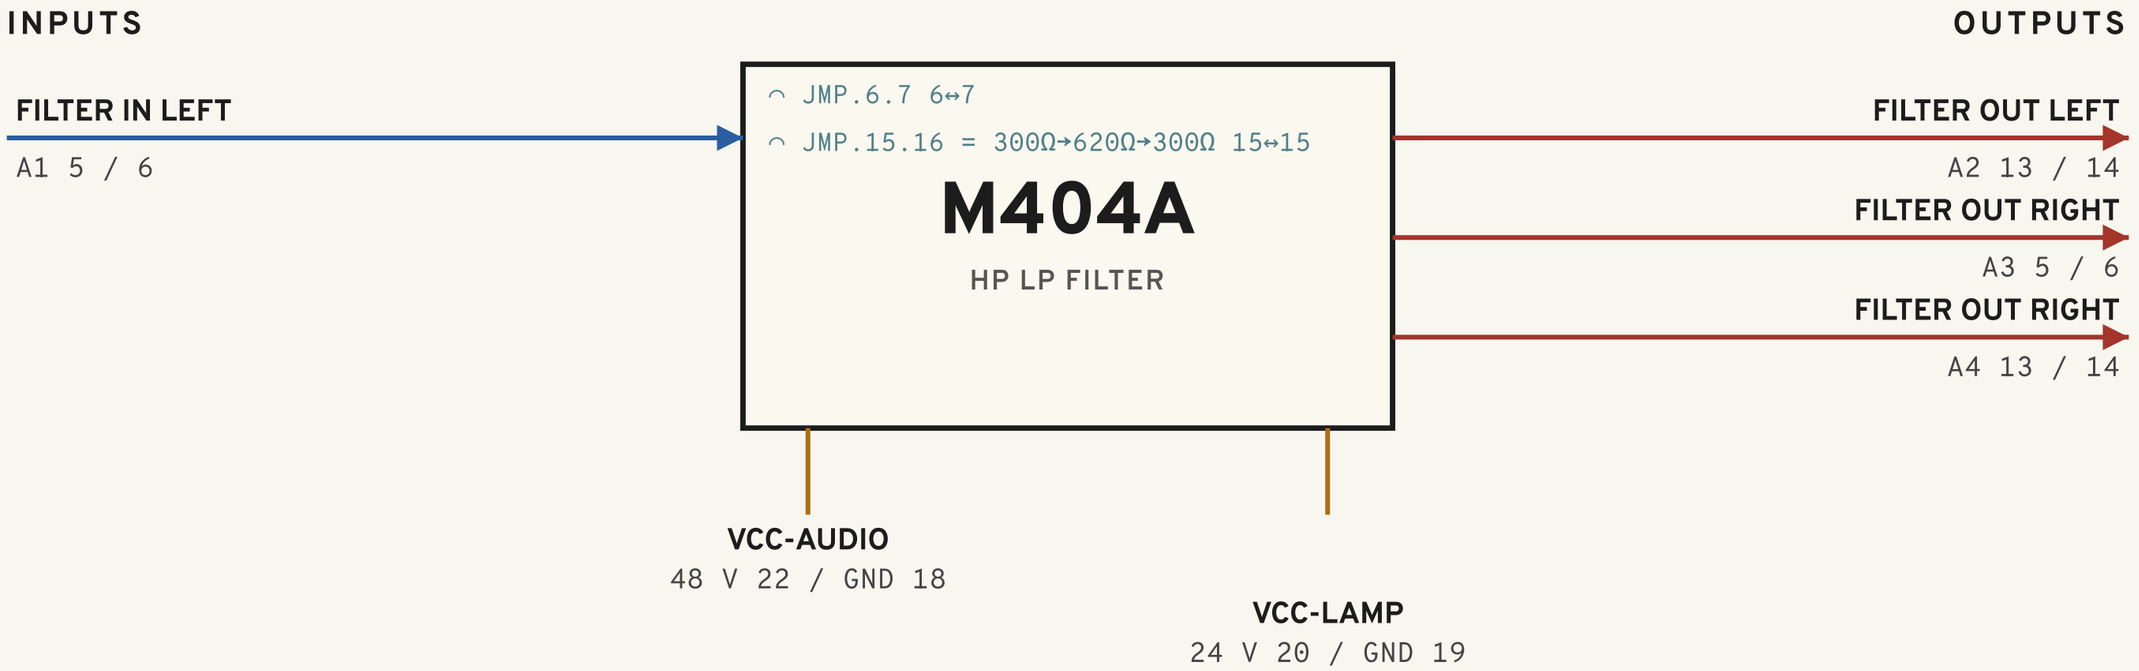

AUDIO CONNECTIONS · RTO-144 A / B

PORT	SIGNAL	DIR	PIN +	PIN −	PAD +	PAD −
A1	Filter IN LEFT	in	5	6	5.A.1.P	6.A.1.N
A2	FILTER OUT LEFT	out	13	14	13.A.2.P	14.A.2.N
A3	FILTER OUT RIGHT	out	5	6	5.A.3.P	6.A.3.N
A4	FILTER OUT RIGHT	out	13	14	13.A.4.P	14.A.4.N

POWER · BENCH PSU

RAIL	STYLE	VOLTS	MAX A	SUPPLY	GROUND	LINK
VCC-AUDIO	OLD	48	0.1	22	18	—
VCC-LAMP	OLD	24	0.1	20	19	—

JUMPERS

FUNCTION	DESIGNATION	FROM	TO
600Ω Input	JMP.6.7	6	7
OUtput 2	JMP.15.16 = 300Ω->620Ω->300Ω	15	15

Source: Ward-Beck Systems - Module RTO-144 Jumper calculator.xlsx (Database tab). Pin direction is inferred from the signal name. Verify against the module schematic before wiring.

WBS WARD-BECK SYSTEMS LTD.			
TITLE	M404A RTO-144 CONNECTIONS		
DRN.	MAKE_RTO144.PY	DATE	OCT 17 2026