
M441M ·RTO-144 CONNECTIONS

PREAMP ·series S400 ·line in 600 Ω, out 600 Ω


REAR CONNECTOR

REAR VIEW ·CARD EDGE ·44 CONTACTS

TOP ROW 1–22: COMPONENT SIDE BOTTOM ROW A–Z: SOLDER SIDE

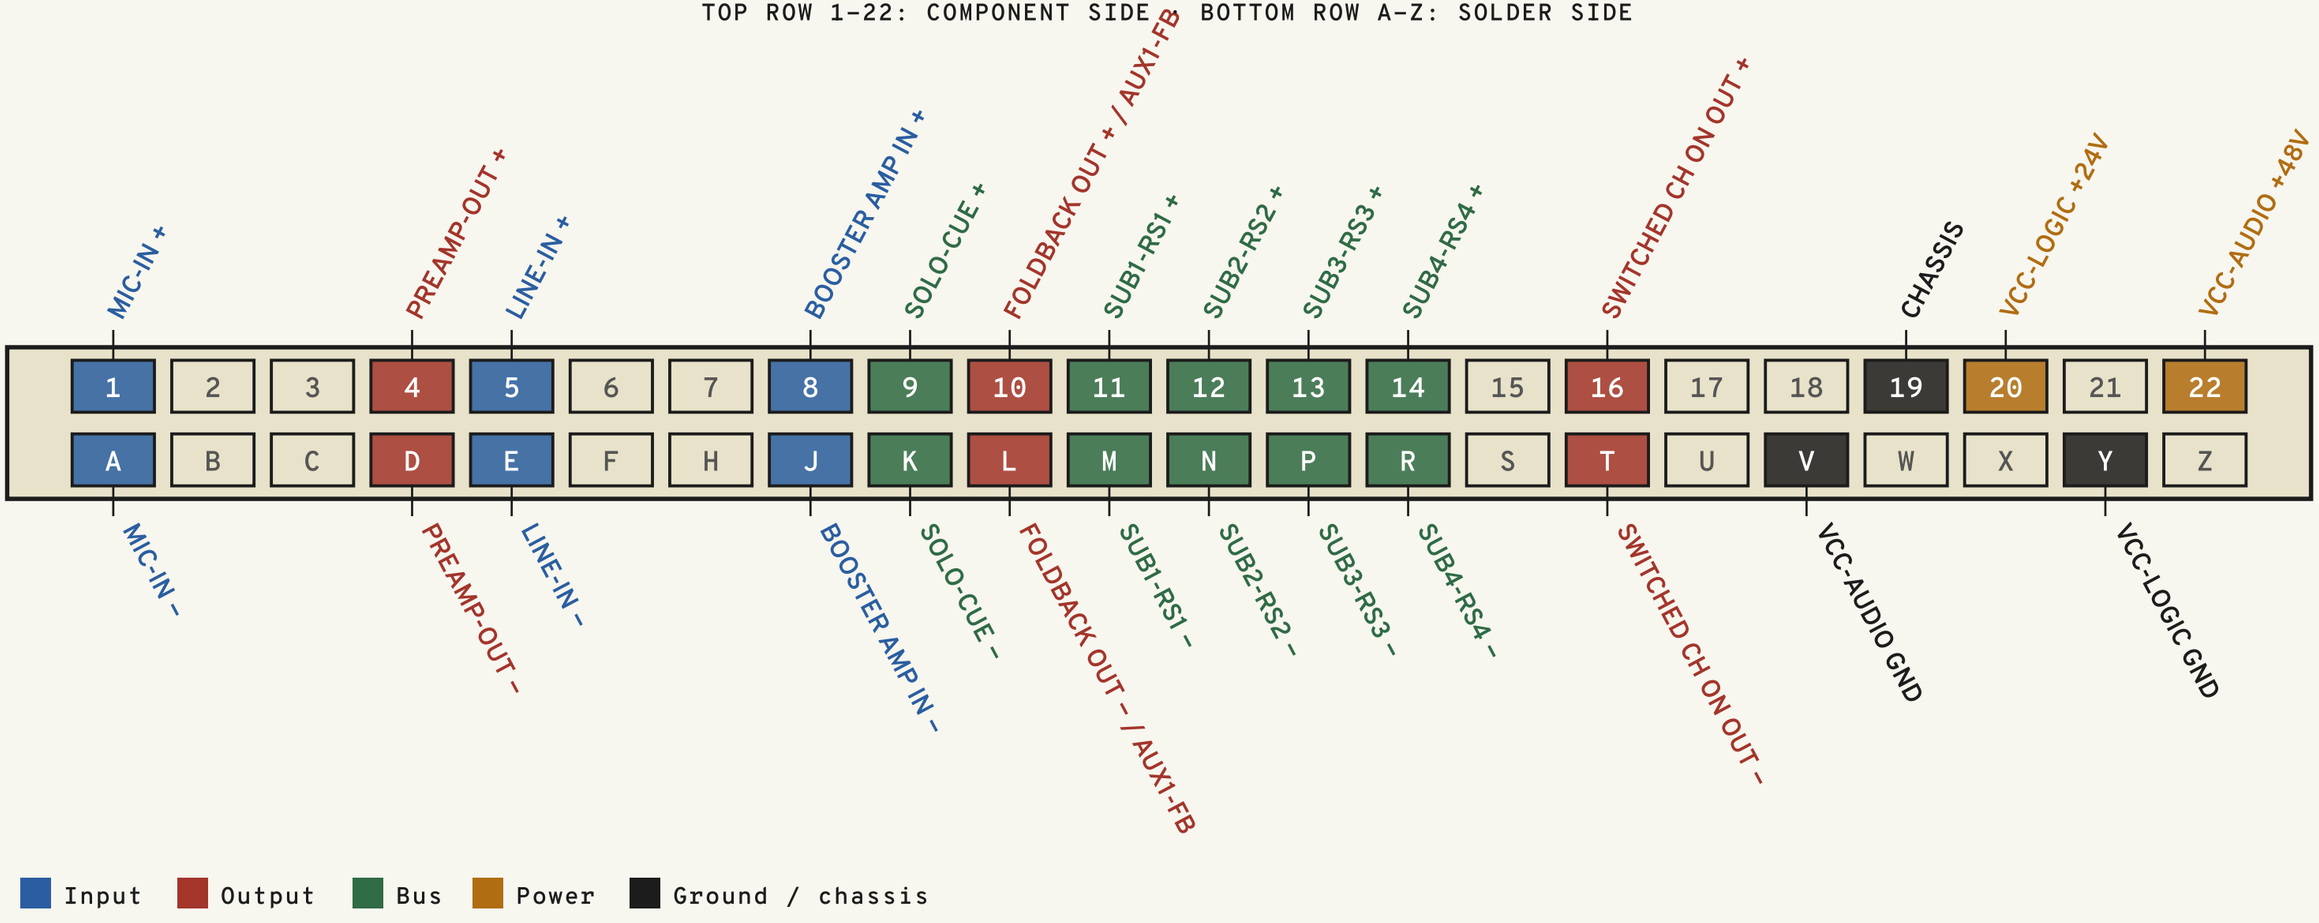

INPUTS AND OUTPUTS

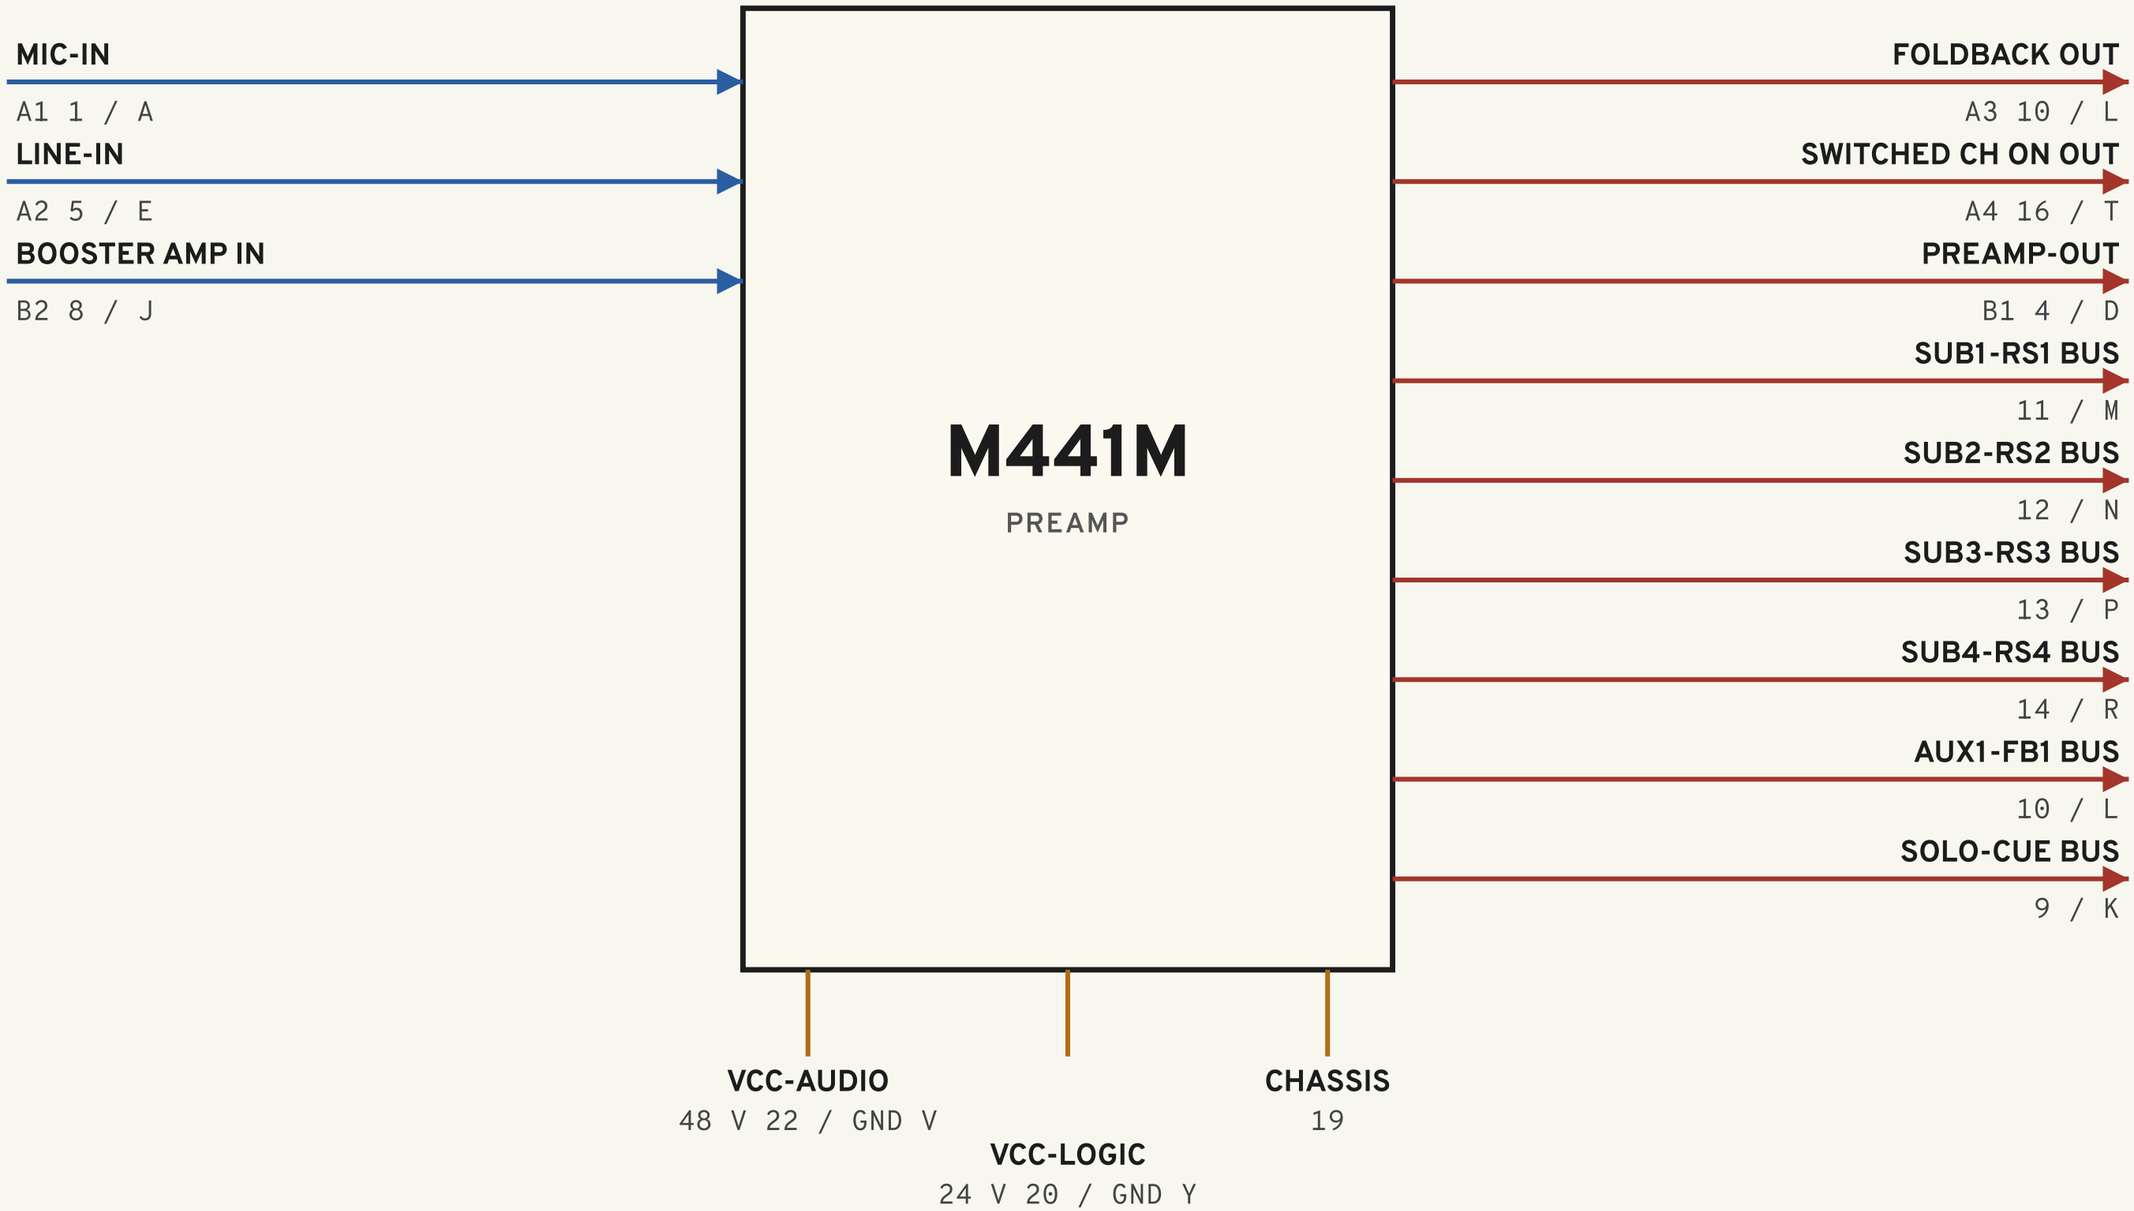

AUDIO CONNECTIONS · RTO-144 A / B

PORT	SIGNAL	DIR	PIN +	PIN −	PAD +	PAD −
A1	MIC-IN	in	1	A	1.A.1.P	A.A.1.N
A2	LINE-IN	in	5	E	5.A.2.P	E.A.2.N
A3	FoldBack OUT	out	10	L	10.A.3.P	L.A.3.N

BUS CONNECTIONS

BUS	DIR	SIGNAL	PIN +	PIN −
SUB1-RS1	out	BUS-SUB1-RS1-OUT	11	M
SUB2-RS2	out	BUS-SUB2-RS2-OUT	12	N
SUB3-RS3	out	BUS-SUB3-RS3-OUT	13	P

POWER · BENCH PSU

RAIL	STYLE	VOLTS	MAX A	SUPPLY	GROUND	LINK
VCC-AUDIO	OLD	48	0.1	22	V	—
VCC-LOGIC	OLD	24	0.1	20	Y	—

PORT	SIGNAL	DIR	PIN +	PIN −	PAD +	PAD −
A4	SWITCHED CH ON OUT	out	16	T	16.A.4.P	T.A.4.N
B1	PREAMP-OUT	out	4	D	4.B.1.P	D.B.1.N
B2	BOOSTER AMP IN	in	8	J	8.B.2.P	J.B.2.N

BUS	DIR	SIGNAL	PIN +	PIN −
SUB4-RS4	out	BUS-RS4-OUT	14	R
AUX1-FB1	out	BUS-FB1-OUT	10	L
SOLO-CUE	out	BUS-SOLO-CUE-OUT	9	K

Source: Ward-Beck Systems - Module RTO-144 Jumper calculator.xlsx (Database tab). Pin direction is inferred from the signal name. Verify against the module schematic before wiring.

WBS WARD-BECK SYSTEMS LTD.			
TITLE	M441M RTO-144 CONNECTIONS		
DRN.	MAKE_RTO144.PY	DATE	OCT 17 2026