
M457 ·RTO-144 CONNECTIONS

M457 - Pre-Mixer ·out 600 Ω


REAR CONNECTOR

REAR VIEW ·CARD EDGE ·44 CONTACTS

TOP ROW 1–22: COMPONENT SIDE · BOTTOM ROW A–Z: SOLDER SIDE

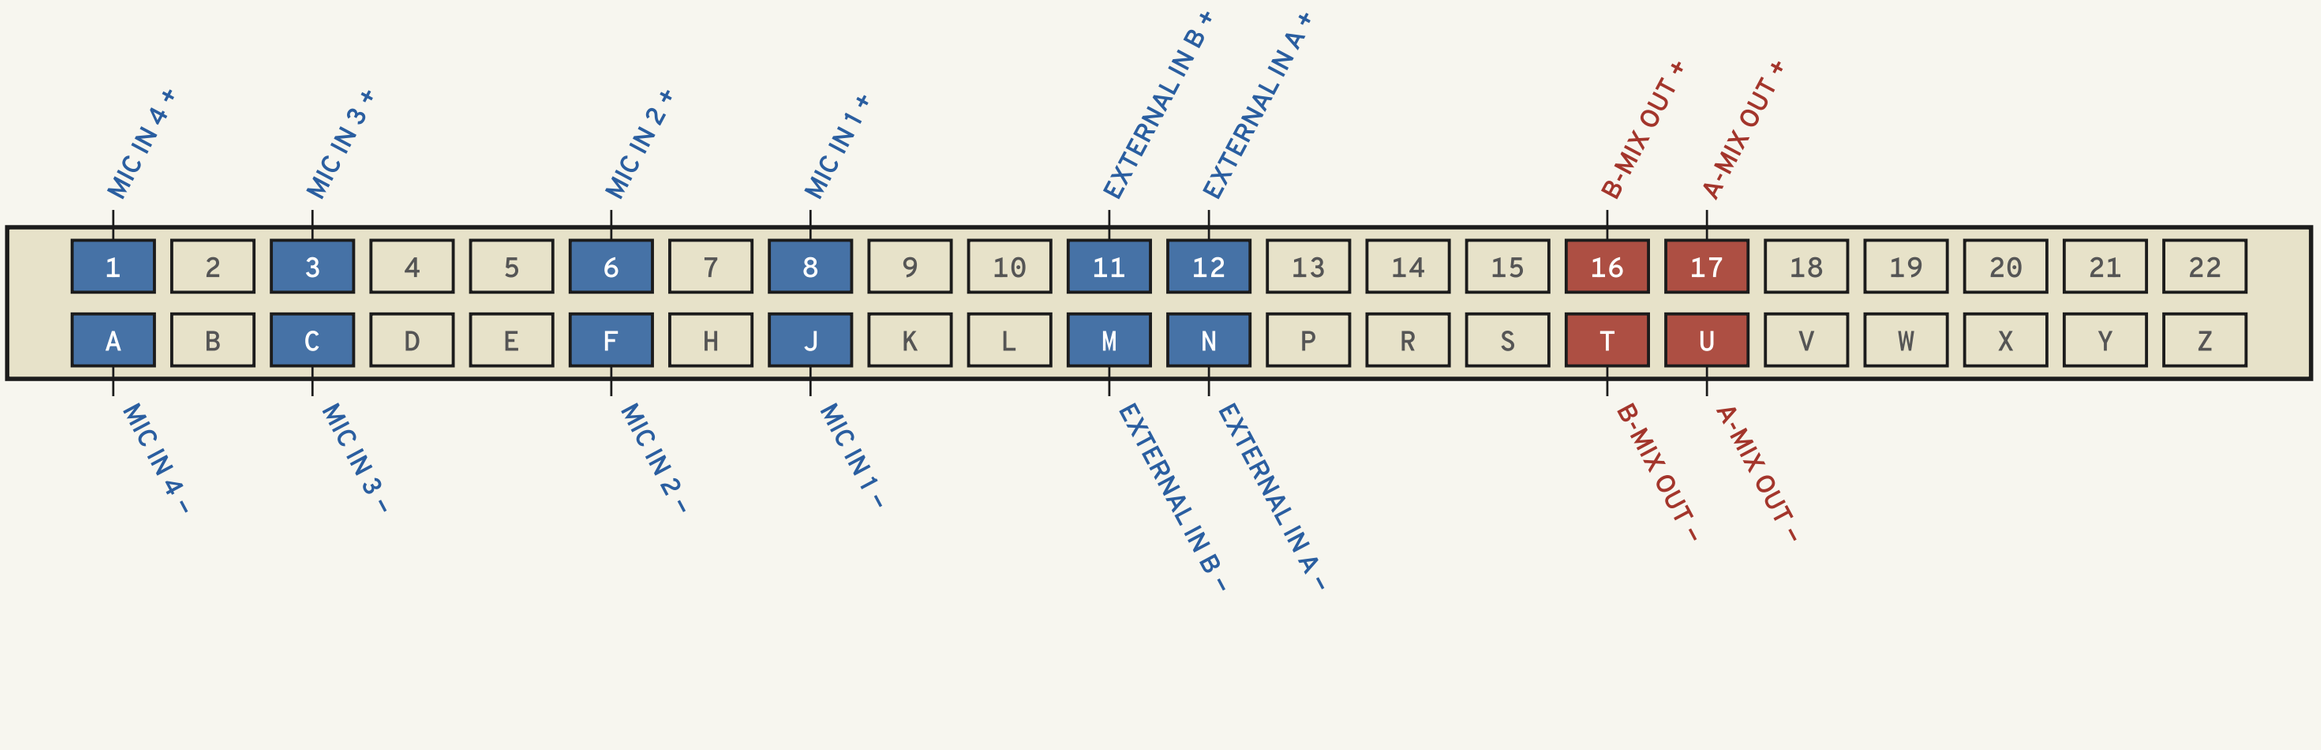

INPUTS AND OUTPUTS

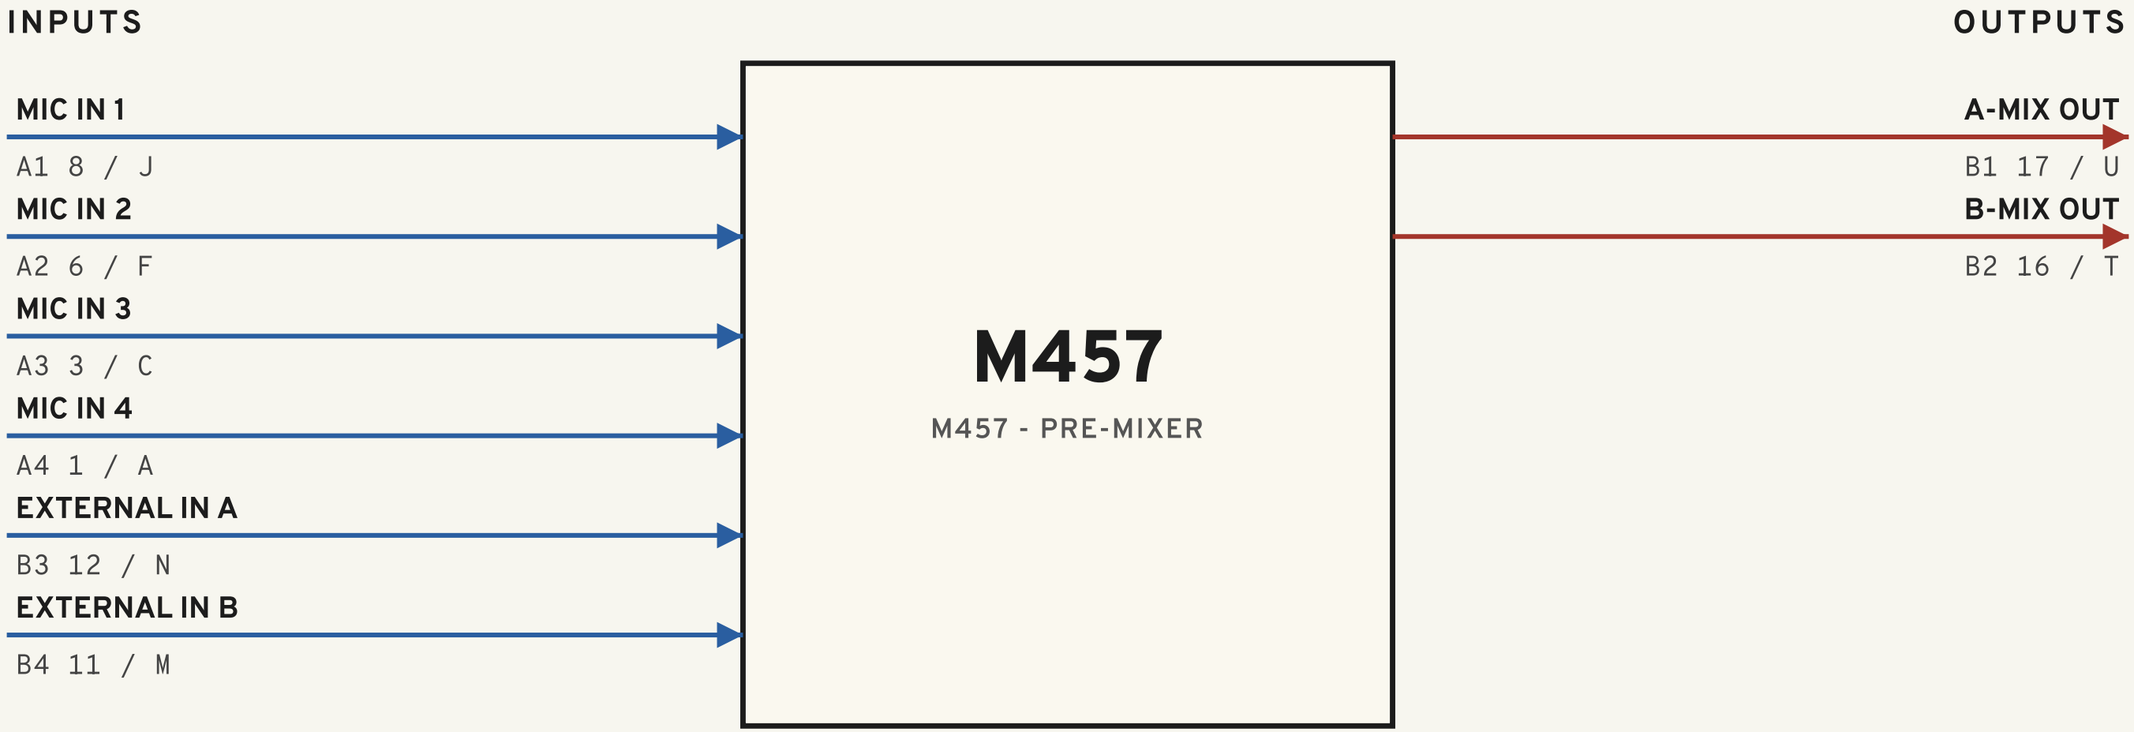

AUDIO CONNECTIONS · RTO-144 A / B

PORT	SIGNAL	DIR	PIN +	PIN –	PAD +	PAD –
A1	MIC IN 1	in	8	J	8.A.1.P	J.A.1.N
A2	MIC IN 2	in	6	F	6.A.2.P	F.A.2.N
A3	MIC IN 3	in	3	C	3.A.3.P	C.A.3.N
A4	MIC IN 4	in	1	A	1.A.4.P	A.A.4.N
B1	A-Mix OUT	out	17	U	17.B.1.P	U.B.1.N
B2	B-Mix OUT	out	16	T	16.B.2.P	T.B.2.N
B3	External IN A	in	12	N	12.B.3.P	N.B.3.N
B4	External IN B	in	11	M	11.B.4.P	M.B.4.N

Source: Ward-Beck Systems - Module RTO-144 Jumper calculator.xlsx (Database tab). Pin direction is inferred from the signal name. Verify against the module schematic before wiring.

WBS	WARD-BECK SYSTEMS LTD.		
TITLE	M457 RTO-144 CONNECTIONS		
DRN.	MAKE_RTO144.PY	DATE	OCT 17 2026