
M461AB · RTO-144 CONNECTIONS

Microphone Preamp


REAR CONNECTOR

REAR VIEW · CARD EDGE · 44 CONTACTS

TOP ROW 1–22: COMPONENT SIDE · BOTTOM ROW A–Z: SOLDER SIDE

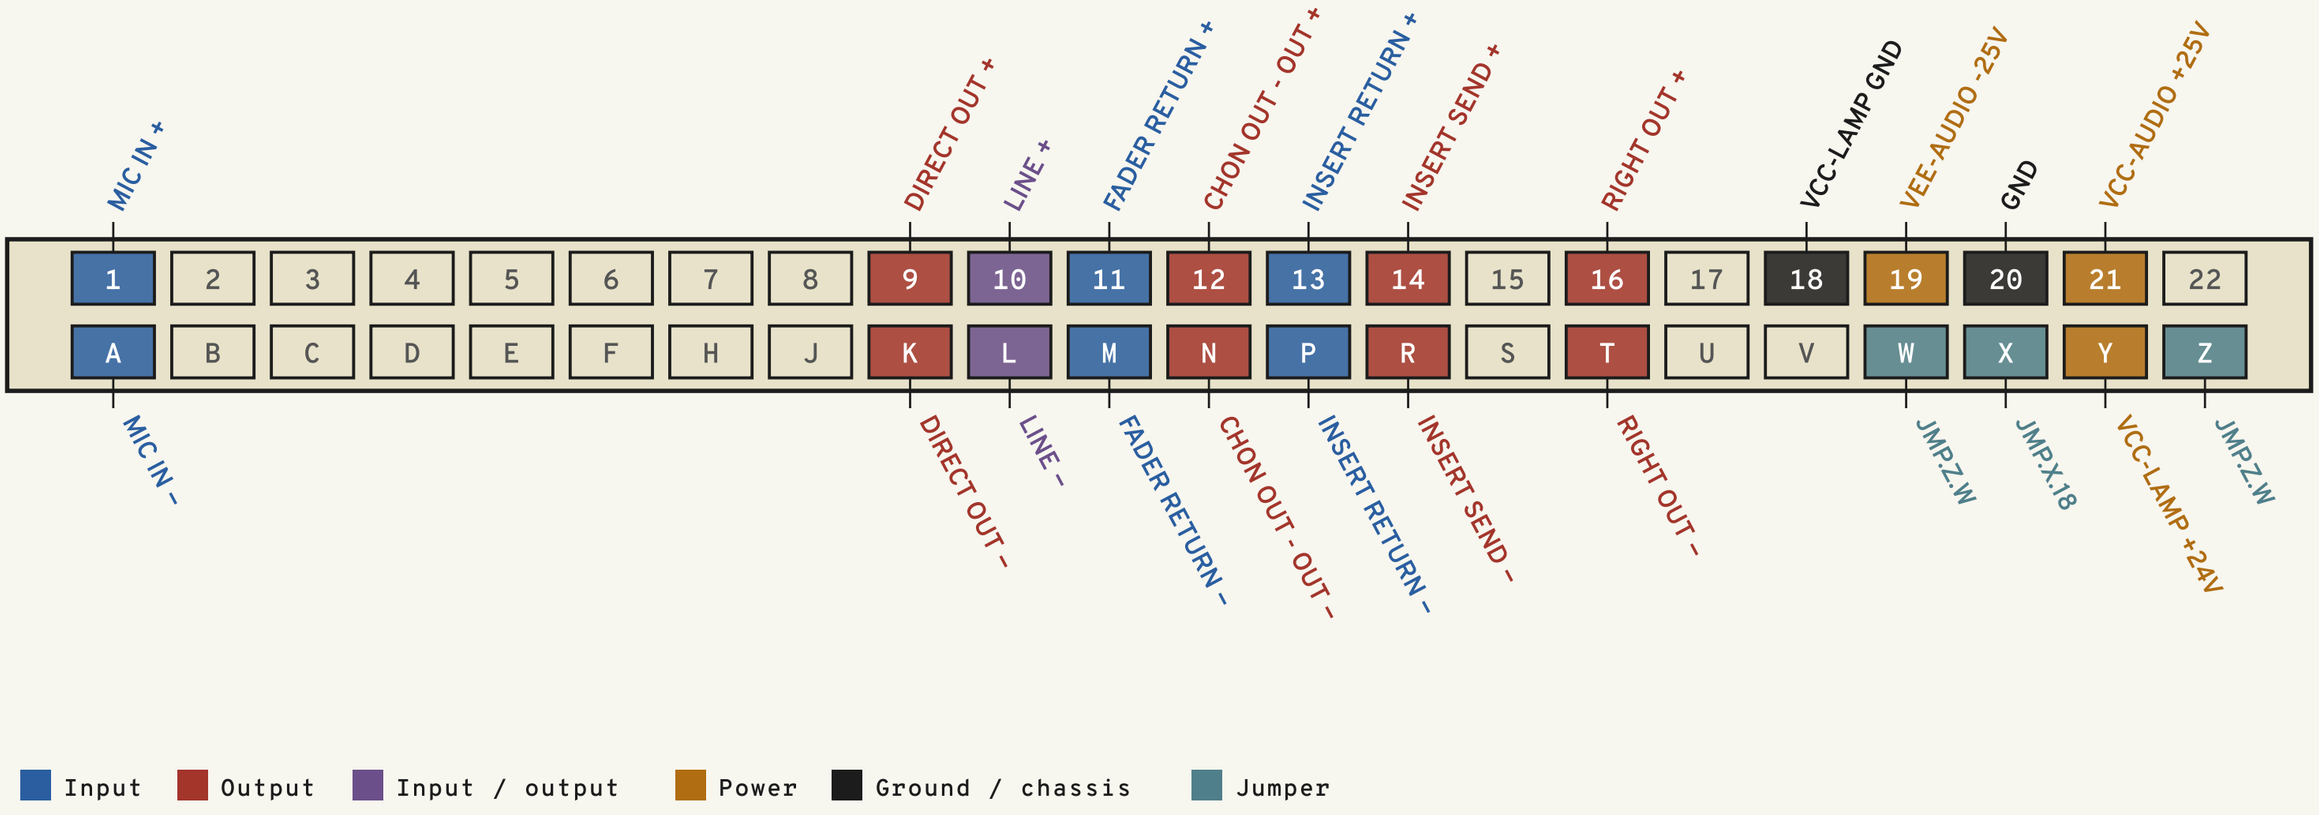

INPUTS AND OUTPUTS

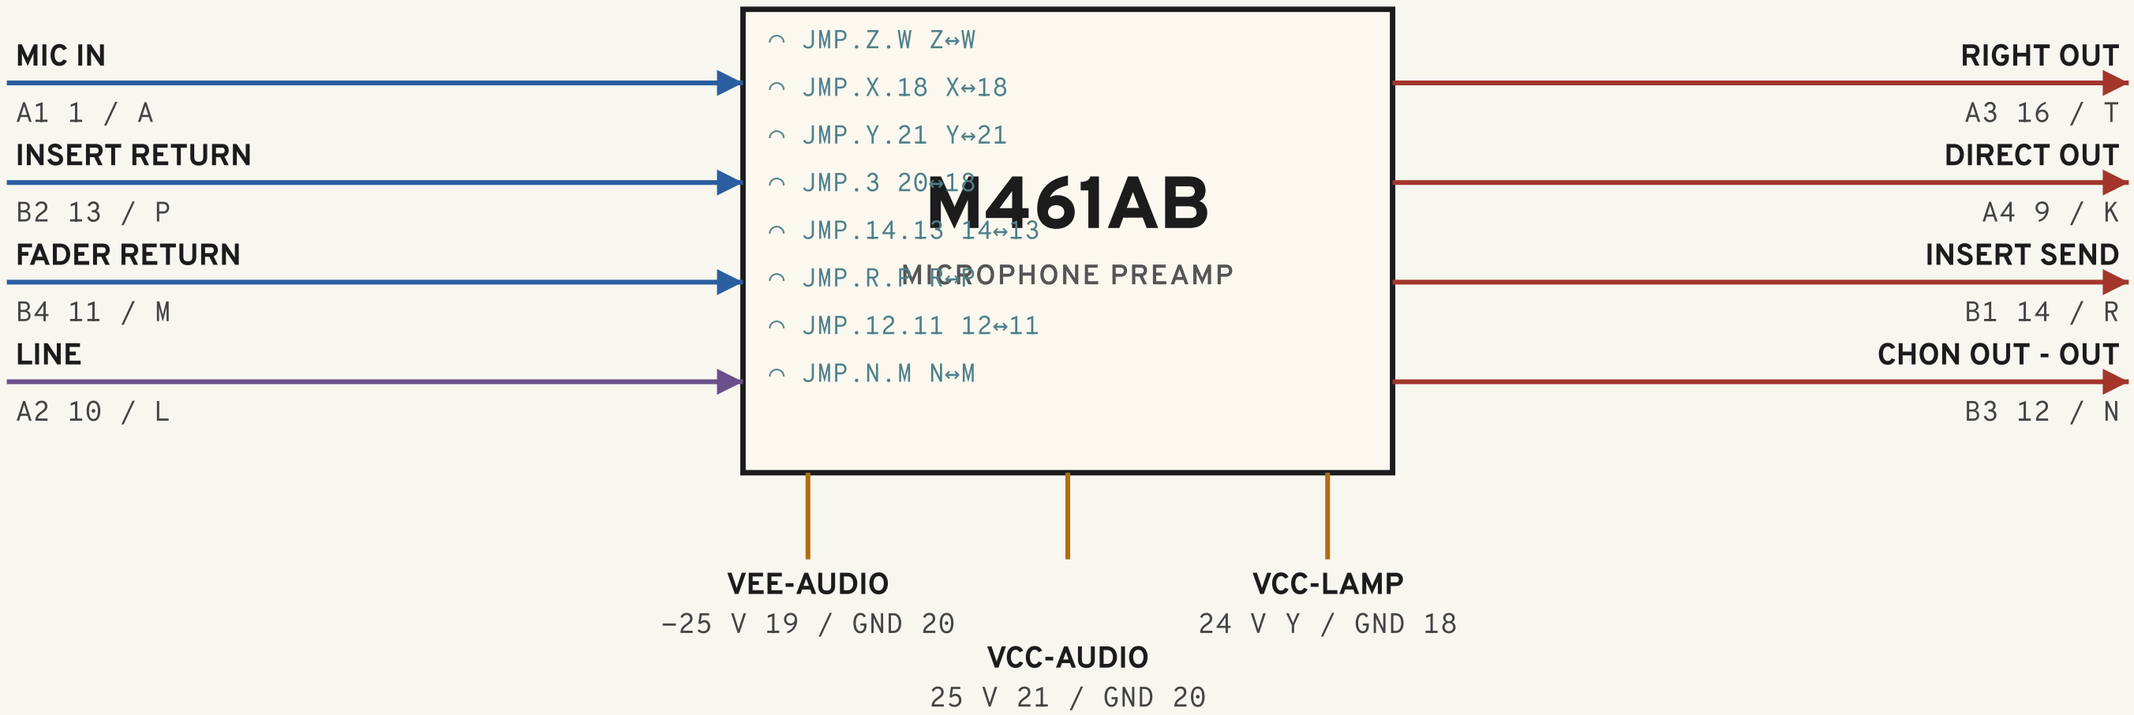

AUDIO CONNECTIONS · RTO-144 A / B

PORT	SIGNAL	DIR	PIN +	PIN −	PAD +	PAD −
A1	Mic In	in	1	A	1.A.1.P	A.A.1.N
A2	Line	io	10	L	10.A.2.P	L.A.2.N
A3	Right OUT	out	16	T	16.A.3.P	T.A.3.N
A4	Direct OUT	out	9	K	9.A.4.P	k.A.4.N
B1	Insert Send	out	14	R	14.B.1.P	R.B.1.N
B2	Insert Return	in	13	P	13.B.2.P	P.B.2.N
B3	CHON OUT - OUT	out	12	N	12.B.3.P	N.B.3.N
B4	Fader Return	in	11	M	11.B.4.P	M.B.4.N

POWER · BENCH PSU

RAIL	STYLE	VOLTS	MAX A	SUPPLY	GROUND	LINK
VEE-AUDIO	NEW	-25	0.1	19	20	2
VCC-AUDIO	NEW	25	0.2	21	20	1
VCC-LAMP	NEW	24	0.1	Y	18	—

JUMPERS

FUNCTION	DESIGNATION	FROM	TO
CH ON LAMP	JMP.Z.W	Z	W
24V Ground	JMP.X.18	X	18
24V to 25V	JMP.Y.21	Y	21
CH ON GND	JMP.3	20	18
Insert SEND	JMP.14.13	14	13
Insert Return	JMP.R.P	R	P
Fader Send	JMP.12.11	12	11
Fader Return	JMP.N.M	N	M

Source: Ward-Beck Systems - Module RTO-144 Jumper calculator.xlsx (Database tab). Pin direction is inferred from the signal name. Verify against the module schematic before wiring.

WBS WARD-BECK SYSTEMS LTD.			
TITLE	M461AB RTO-144 CONNECTIONS		
DRN.	MAKE_RTO144.PY	DATE	OCT 17 2026