
M464 · RTO-144 CONNECTIONS


FILTER · series L-EFFECT · line in 600 Ω, out 600 Ω

REAR CONNECTOR

REAR VIEW · CARD EDGE · 22 CONTACTS

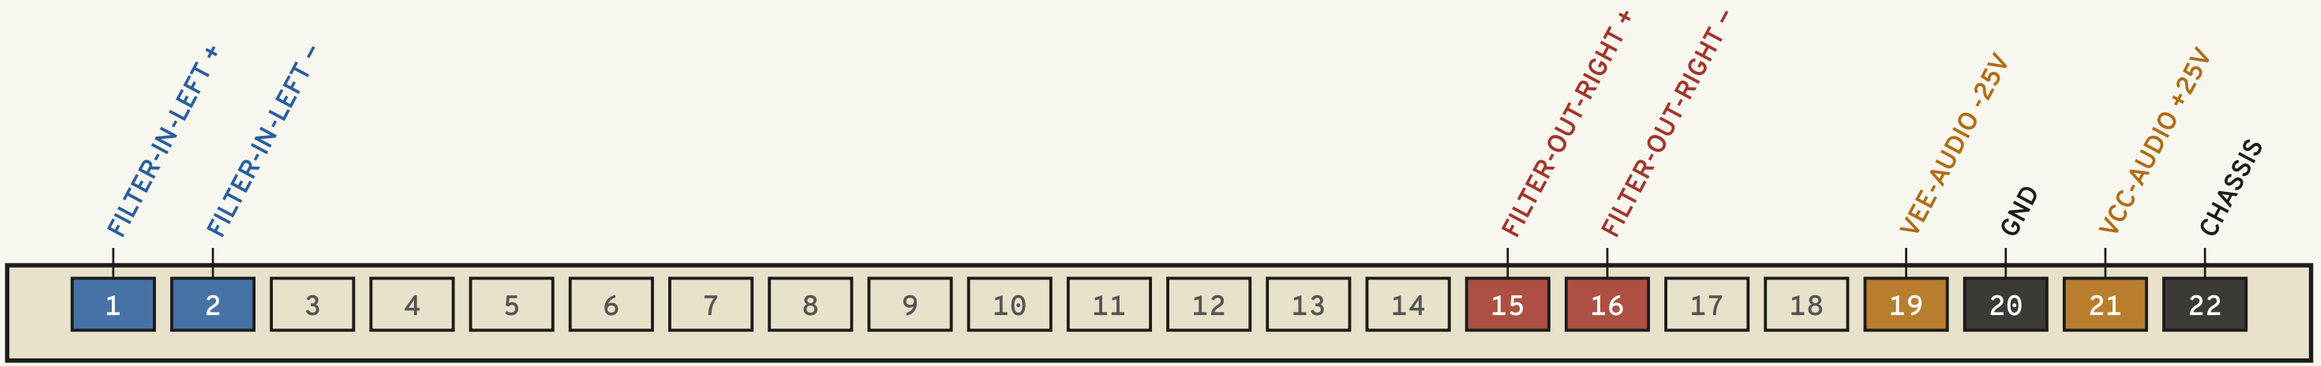

INPUTS AND OUTPUTS

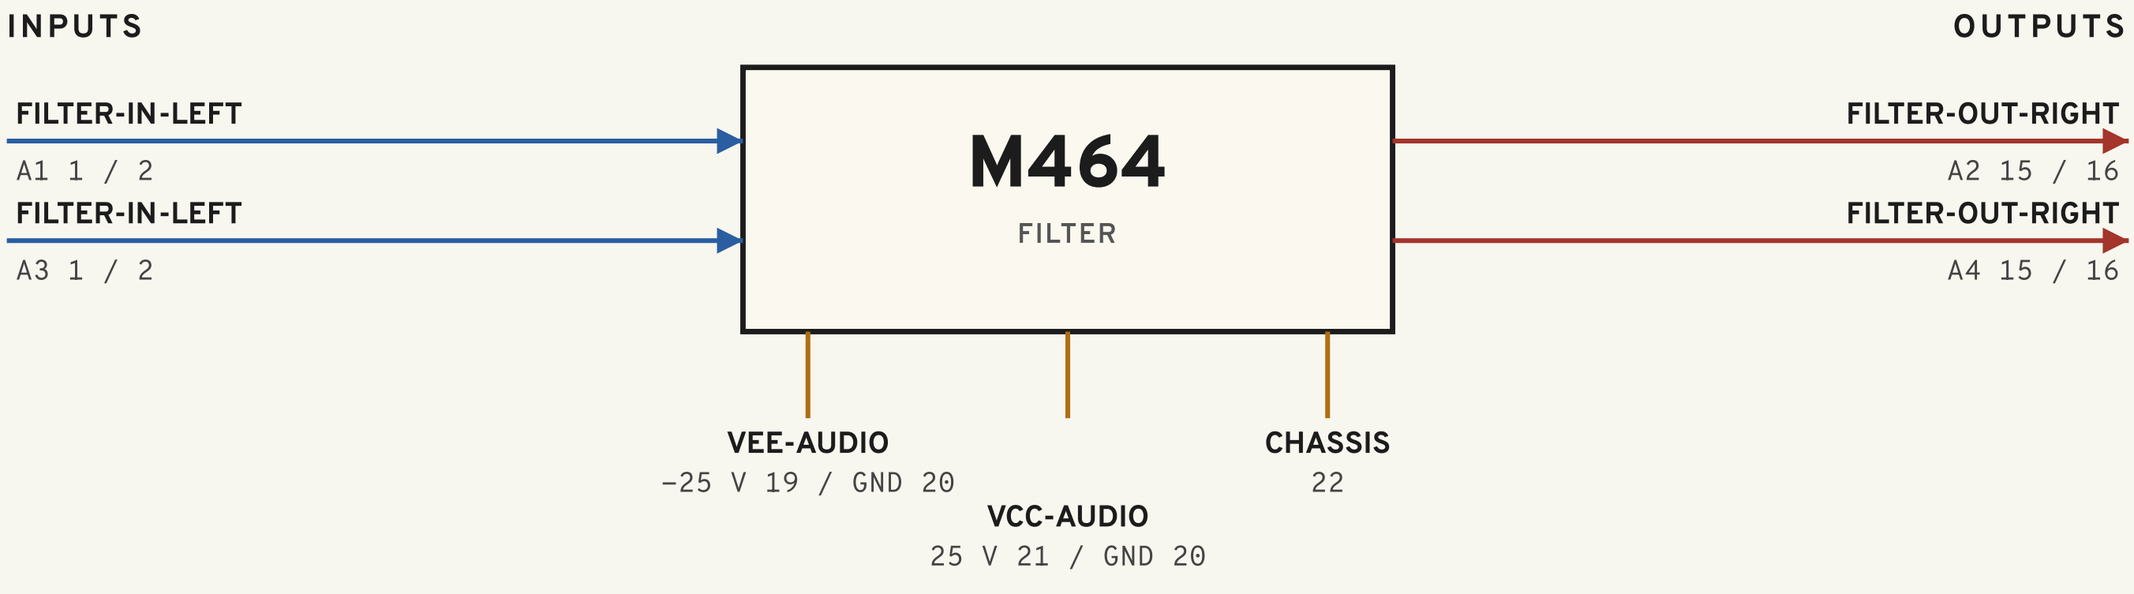

AUDIO CONNECTIONS · RTO-144 A / B

PORT	SIGNAL	DIR	PIN +	PIN −	PAD +	PAD −
A1	FILTER-IN-LEFT	in	1	2	1.A.1.P	2.A.1.N
A2	Filter-OUT-RIGHT	out	15	16	15.A.2.P	16.A.2.N
A3	FILTER-IN-LEFT	in	1	2	1.A.3.P	2.A.3.N
A4	Filter-OUT-RIGHT	out	15	16	15.A.4.P	16.A.4.N

Source: Ward-Beck Systems - Module RTO-144 Jumper calculator.xlsx (Database tab). Pin direction is inferred from the signal name. Verify against the module schematic before wiring.

POWER · BENCH PSU

RAIL	STYLE	VOLTS	MAX A	SUPPLY	GROUND	LINK
VEE-AUDIO	NEW	-25	0.2	19	20	2
VCC-AUDIO	NEW	25	0.2	21	20	1

WBS	WARD-BECK SYSTEMS LTD.		
TITLE	M464 RTO-144 CONNECTIONS		
DRN.	MAKE_RTO144.PY	DATE	OCT 17 2026