
M480 · RTO-144 CONNECTIONS

M480B Input Module


REAR CONNECTOR

REAR VIEW · CARD EDGE · 44 CONTACTS

TOP ROW 1–22: COMPONENT SIDE · BOTTOM ROW A–Z: SOLDER SIDE

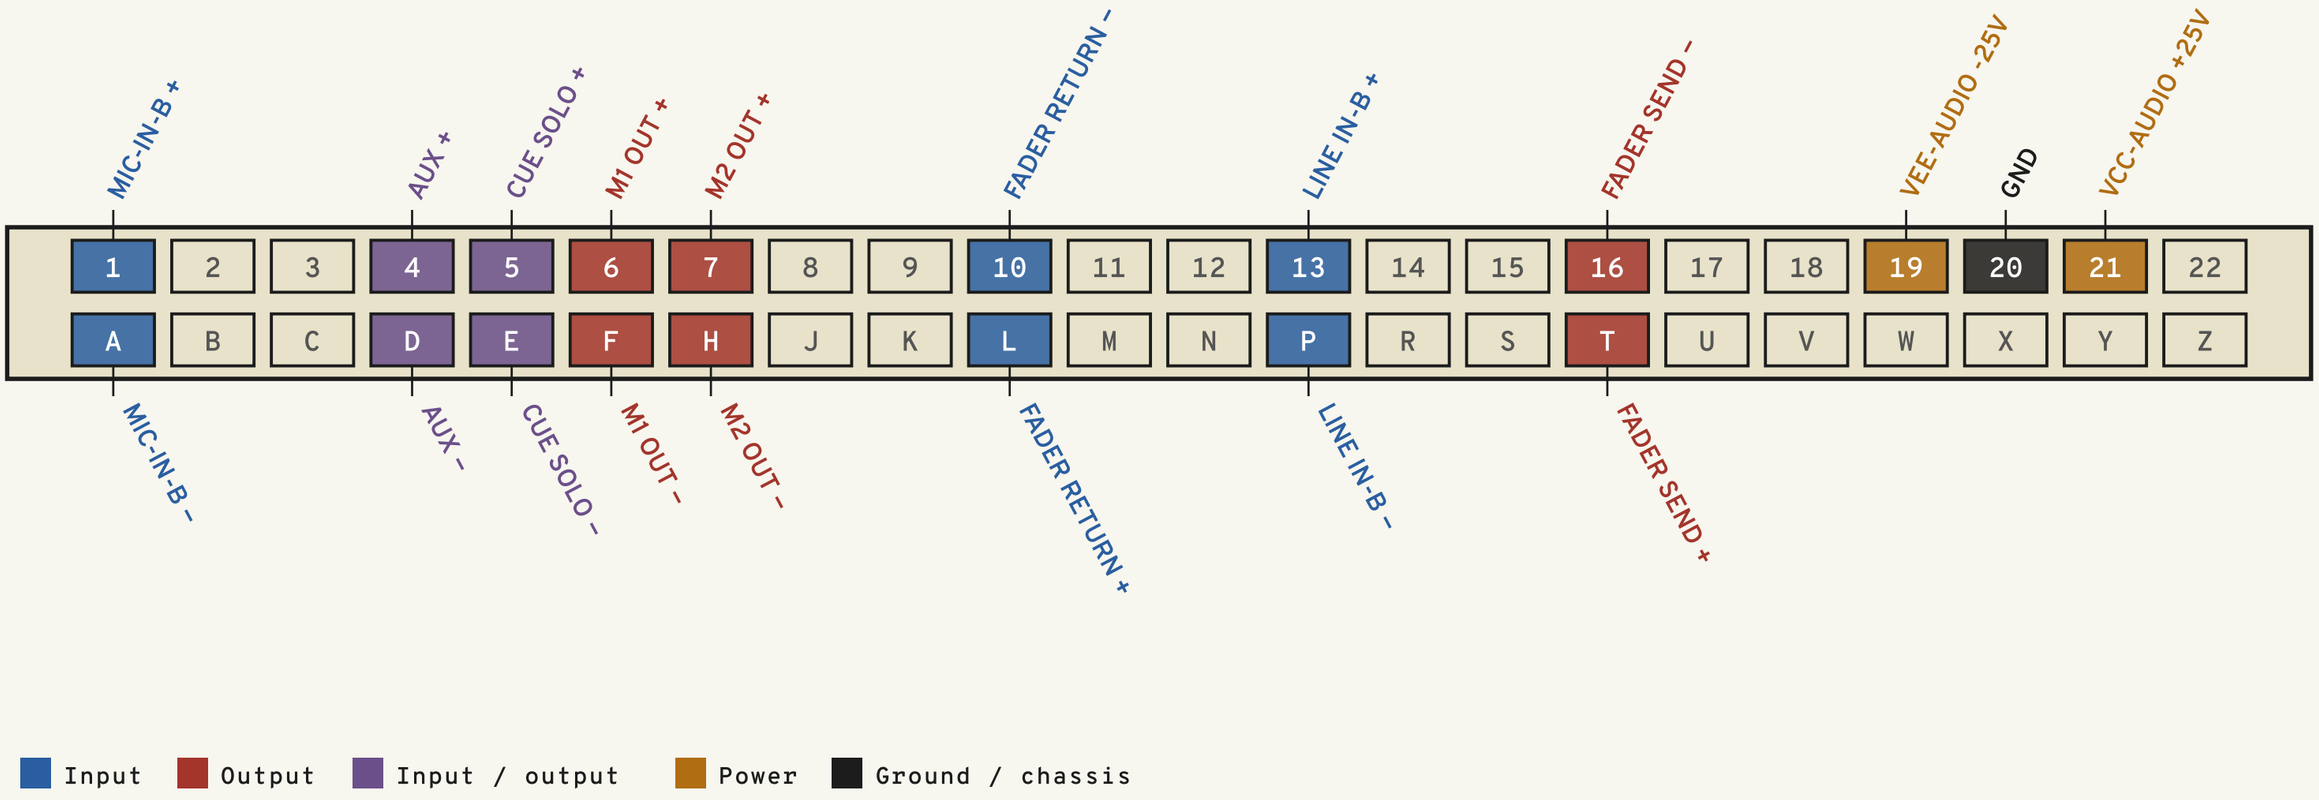

INPUTS AND OUTPUTS

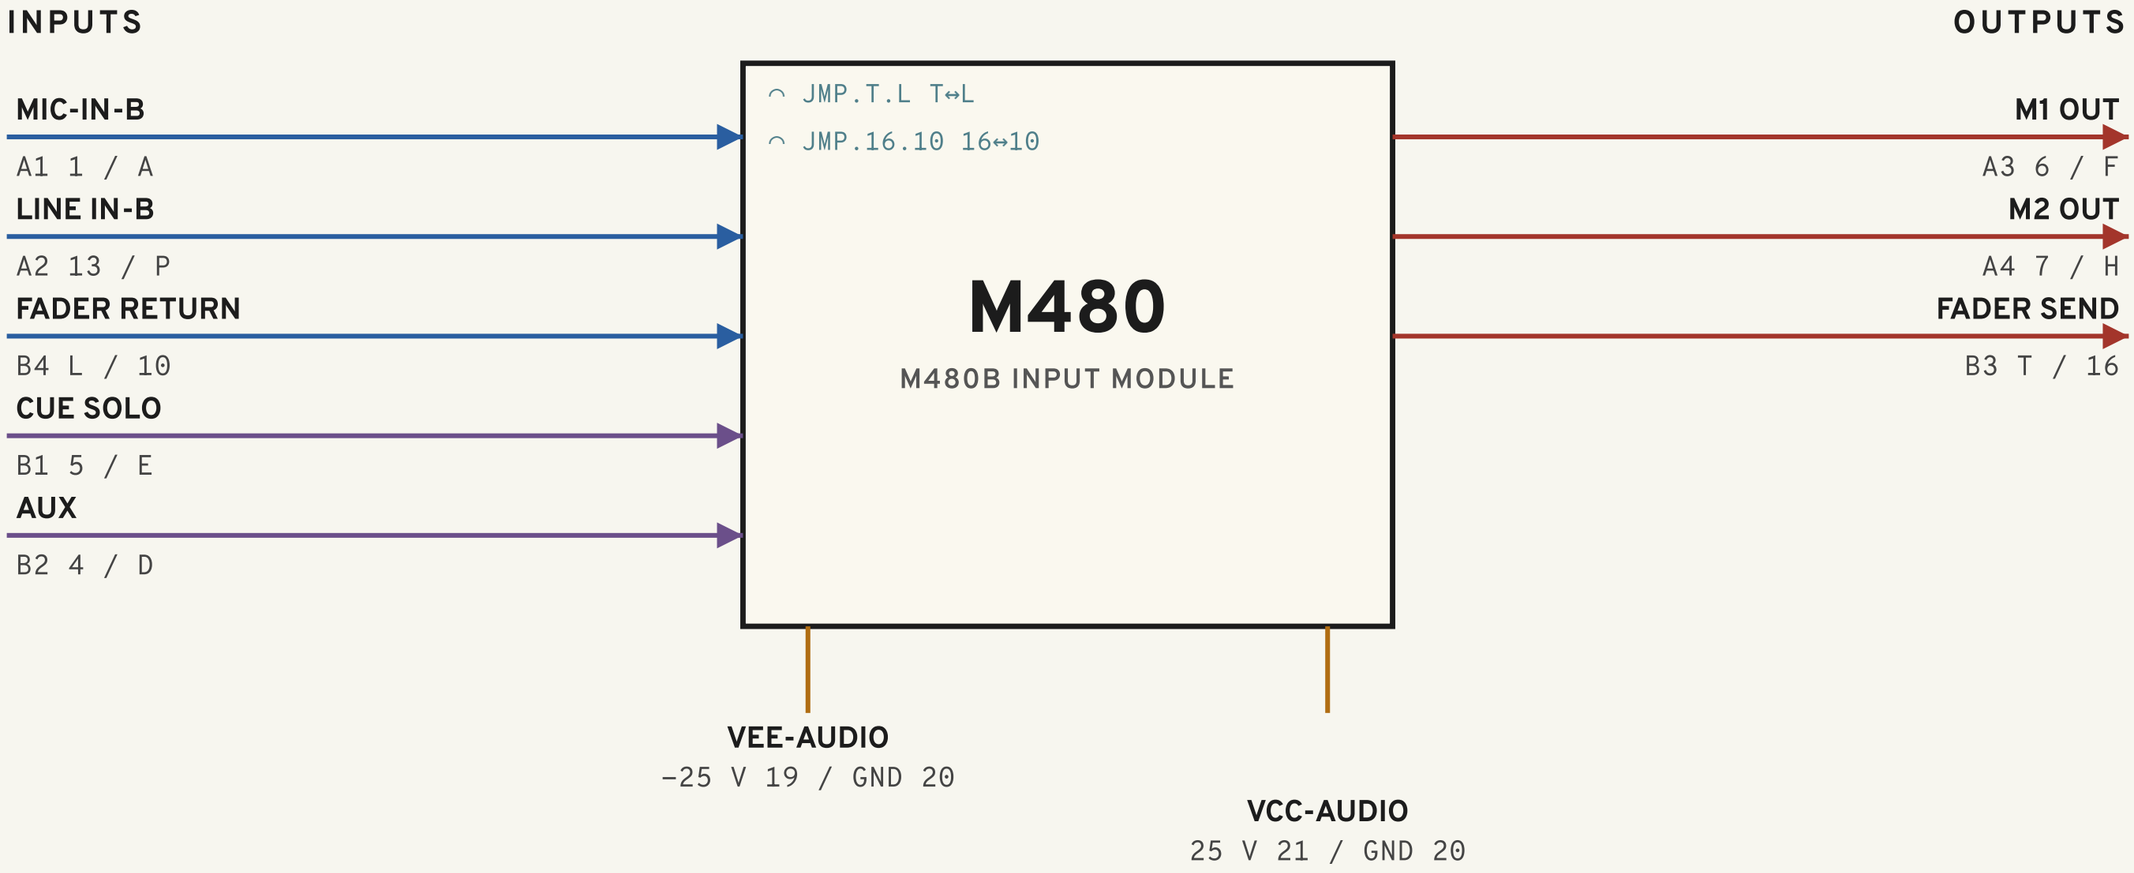

AUDIO CONNECTIONS · RTO-144 A / B

PORT	SIGNAL	DIR	PIN +	PIN −	PAD +	PAD −
A1	MIC-IN-B	in	1	A	1.A.1.P	A.A.1.N
A2	Line IN-B	in	13	P	13.A.2.P	P.A.2.N
A3	M1 OUT	out	6	F	6.A.3.P	F.A.3.N
A4	M2 OUT	out	7	H	7.A.4.P	H.A.4.N
B1	Cue Solo	io	5	E	5.B.1.P	E.B.1.N
B2	Aux	io	4	D	4.B.2.P	D.B.2.N
B3	Fader Send	out	T	16	T.B.3.P	16.B.3.N
B4	Fader Return	in	L	10	L.B.4.P	10.B.4.N

POWER · BENCH PSU

RAIL	STYLE	VOLTS	MAX A	SUPPLY	GROUND	LINK
VEE-AUDIO	NEW	−25	0.2	19	20	2
VCC-AUDIO	NEW	25	0.2	21	20	1

JUMPERS

FUNCTION	DESIGNATION	FROM	TO
Fader	JMP.T.L	T	L
Fader	JMP.16.10	16	10

Source: Ward-Beck Systems - Module RTO-144 Jumper calculator.xlsx (Database tab). Pin direction is inferred from the signal name. Verify against the module schematic before wiring.

WBS	WARD-BECK SYSTEMS LTD.		
TITLE	M480 RTO-144 CONNECTIONS		
DRN.	MAKE_RTO144.PY	DATE	OCT 17 2026