
M495 · RTO-144 CONNECTIONS

M495 - Stereo Monitor Module


REAR CONNECTOR

REAR VIEW · CARD EDGE · 44 CONTACTS

TOP ROW 1–22: COMPONENT SIDE · BOTTOM ROW A–Z: SOLDER SIDE

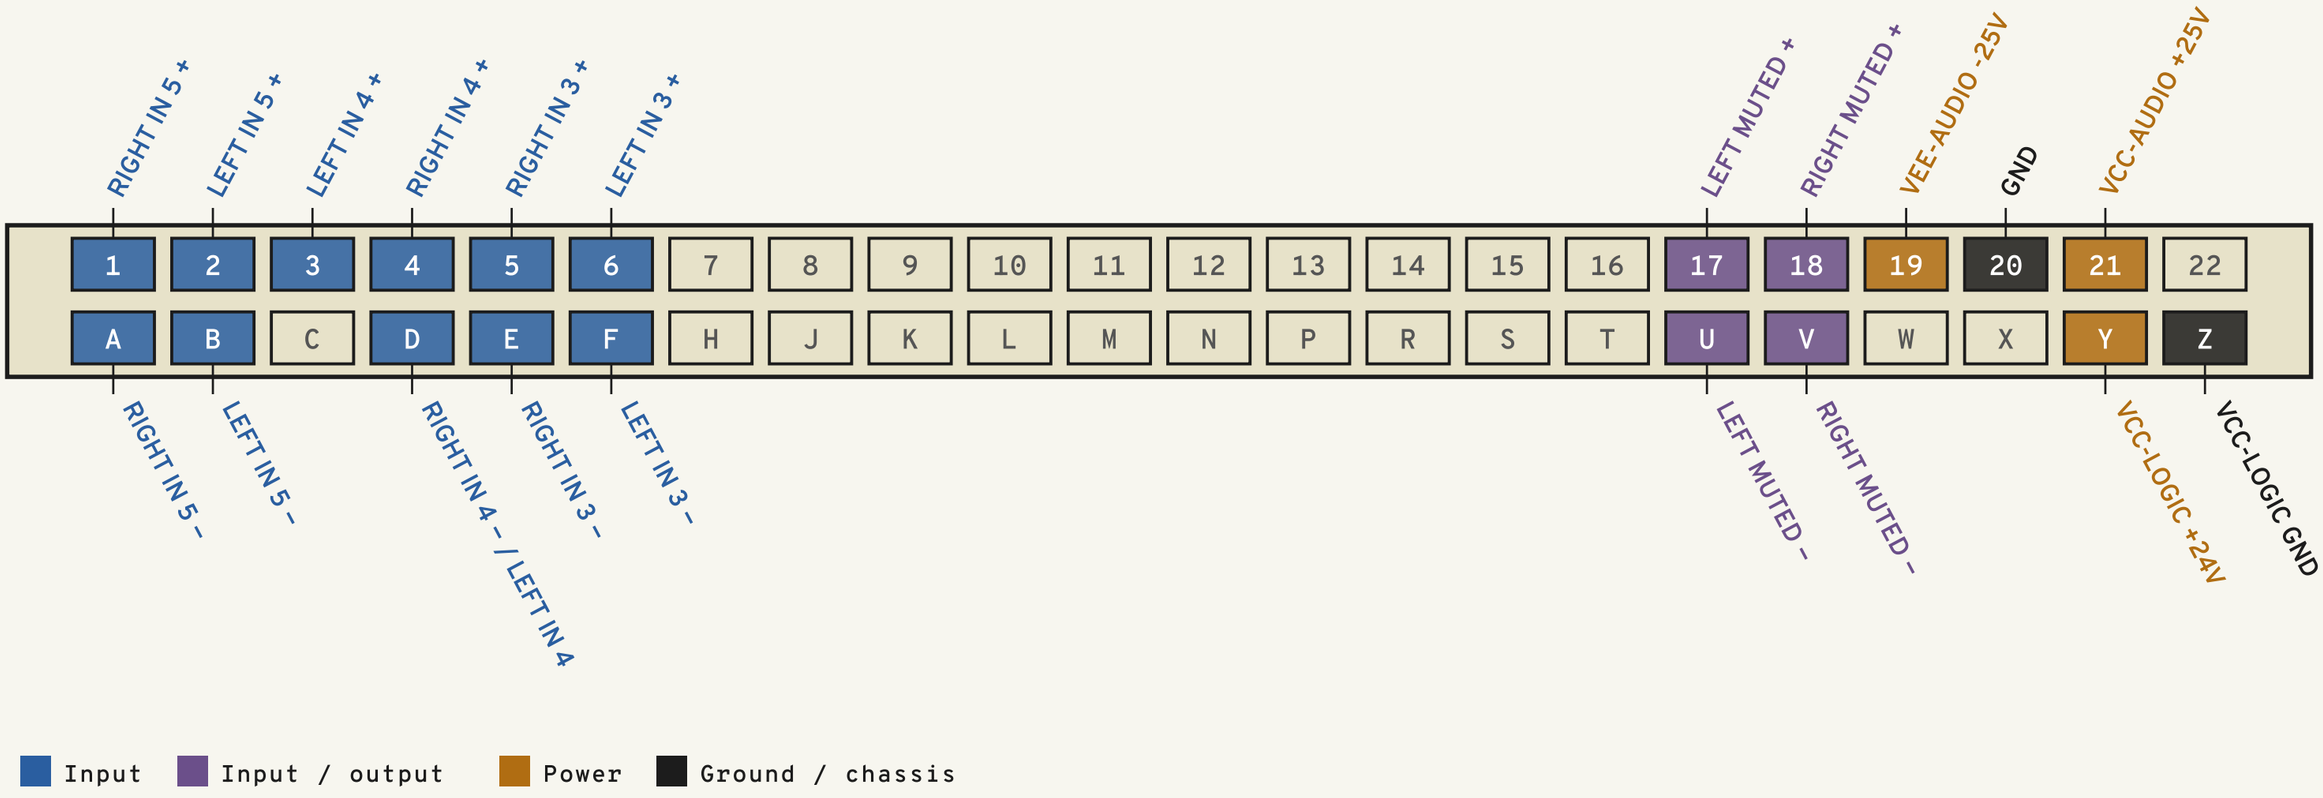

INPUTS AND OUTPUTS

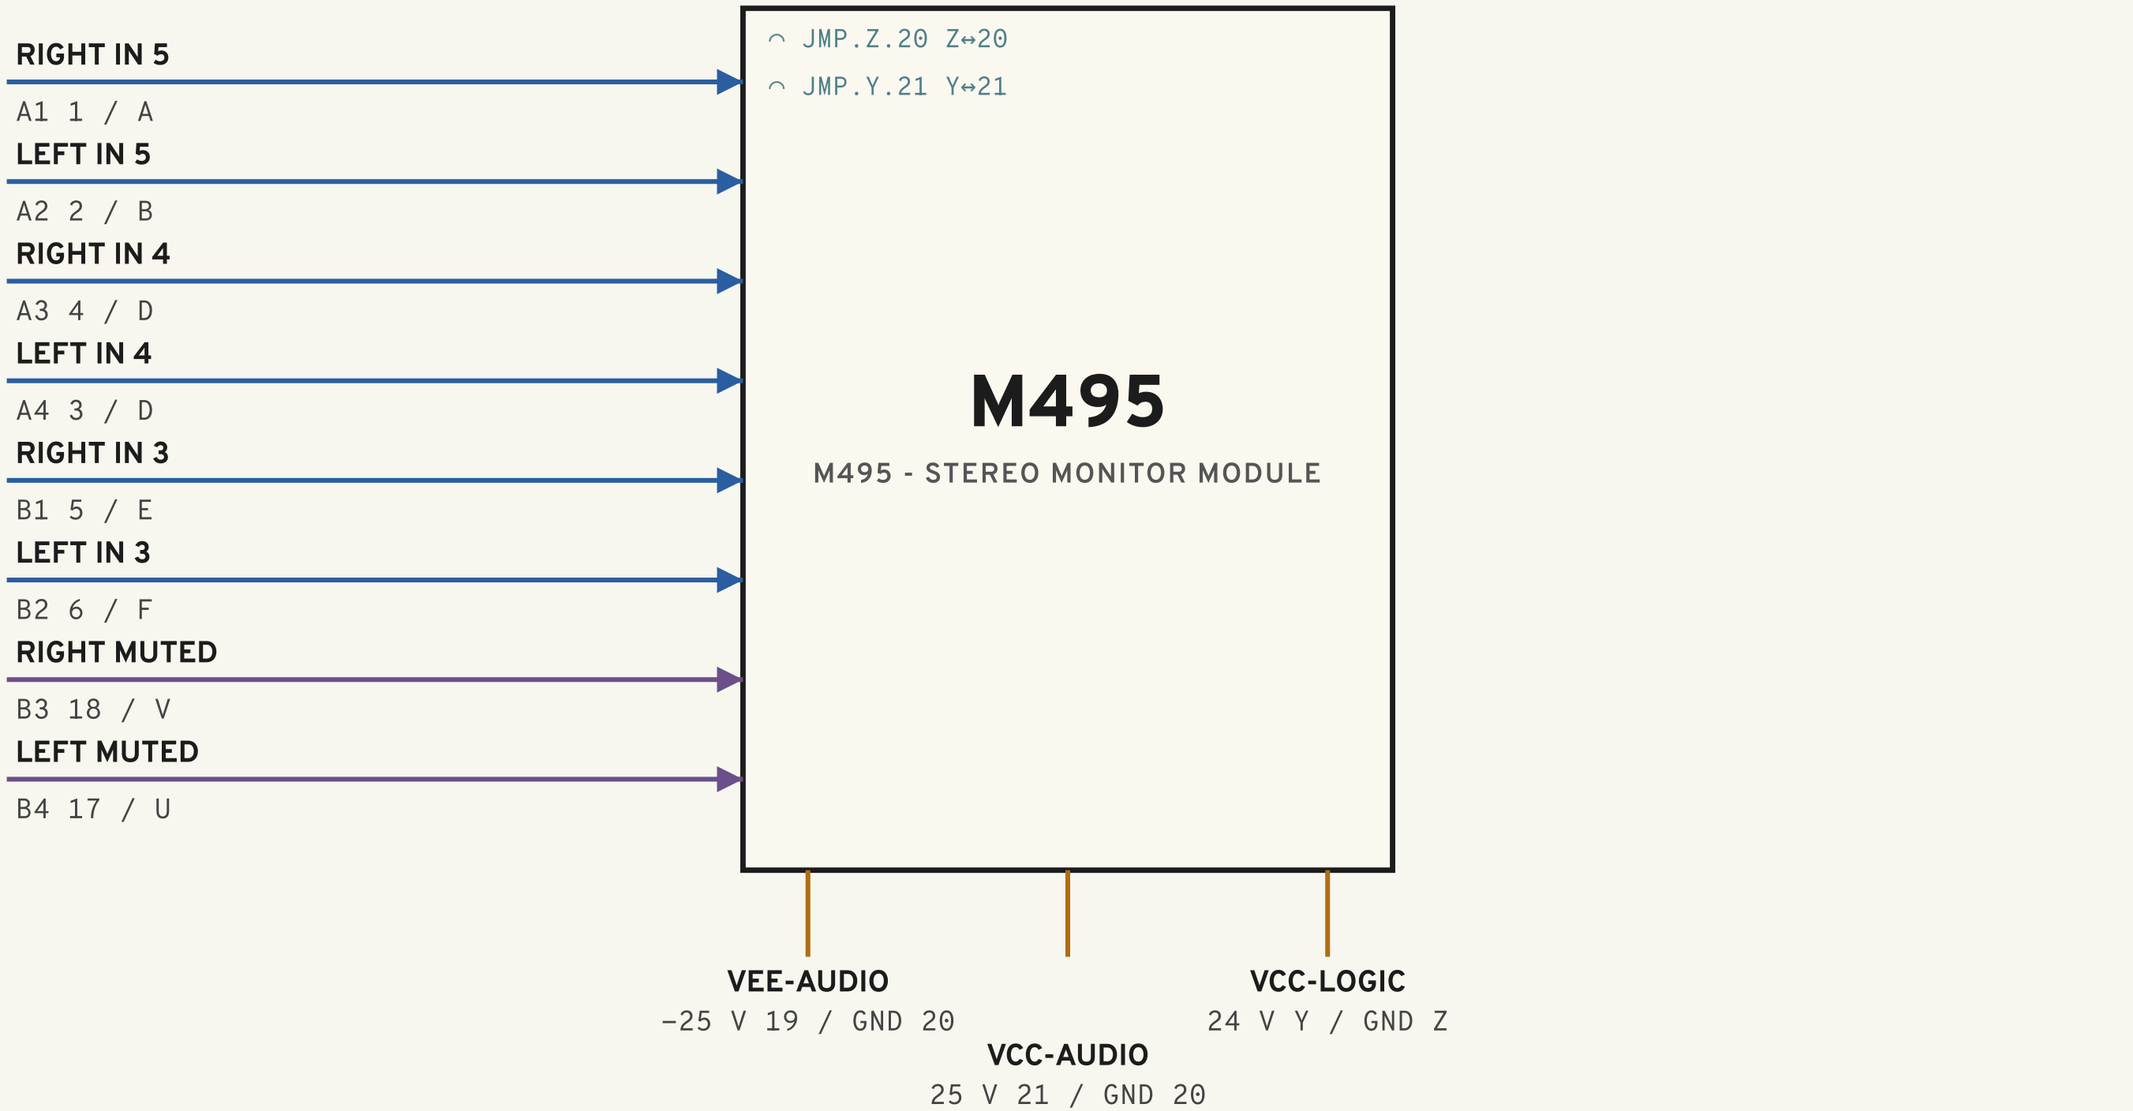

AUDIO CONNECTIONS · RTO-144 A / B

PORT	SIGNAL	DIR	PIN +	PIN −	PAD +	PAD −
A1	Right IN 5	in	1	A	1.A.1.P	A.A.1.N
A2	Left IN 5	in	2	B	2.A.2.P	B.A.2.N
A3	Right IN 4	in	4	D	4.A.3.P	D.A.3.N
A4	Left IN 4	in	3	D	3.A.4.P	D.A.4.N
B1	Right IN 3	in	5	E	5.B.1.P	E.B.1.N
B2	Left IN 3	in	6	F	6.B.2.P	F.B.2.N

POWER · BENCH PSU

RAIL	STYLE	VOLTS	MAX A	SUPPLY	GROUND	LINK
VEE-AUDIO	NEW	-25	0.2	19	20	2
VCC-AUDIO	NEW	25	0.2	21	20	1
VCC-LOGIC	NEW	24	0.2	Y	Z	—

JUMPERS

FUNCTION	DESIGNATION	FROM	TO
CTRL COM	JMP.Z.20	Z	20
24V	JMP.Y.21	Y	21

PORT	SIGNAL	DIR	PIN +	PIN −	PAD +	PAD −
B3	Right Muted	io	18	V	18.B.3.P	V.B.3.N
B4	Left Muted	io	17	U	17.B.4.P	U.B.4.N

Source: Ward-Beck Systems - Module RTO-144 Jumper calculator.xlsx (Database tab). Pin direction is inferred from the signal name. Verify against the module schematic before wiring.

WBS WARD-BECK SYSTEMS LTD.			
TITLE	M495 RTO-144 CONNECTIONS		
DRN.	MAKE_RTO144.PY	DATE	OCT 17 2026