

Modeling and Optimizing a Battery Charging Profile

In this project, you will use MATLAB to model a battery charging profile. You will fit real lithium-ion battery data in MATLAB, compute energy transfer through numerical integration, and analyze key performance characteristics such as charge-rate behavior and efficiency losses.

Use this Live Script as a template to get started on your project solution. You may include helper functions at the bottom of this document or as separate files. For a tutorial on how to use Live Scripts, check out this [video](#).

Suggested Tasks

1. Given data for a lithium-ion battery charging profile, use MATLAB to fit the equation for voltage provided in the Project Description.
2. Plot the following curves: voltage vs. time, current vs. time, and power vs. time.
3. Use integration to compute the total energy delivered to the battery (area under power-time curve).
4. Analyze the rate of voltage change at different intervals (calculate derivatives), compute the time to reach 80% and 100% charge, and compute the energy lost due to resistance.

Table of Contents

Task 1: Fit the voltage equation to a lithium-ion battery profile	1
Task 2: Plot the electrical terms that express how energy moves in a circuit	7
Task 3: Compute analytical results	10

Task 1: Fit the voltage equation to a lithium-ion battery profile

Description of the data: Single cell cycled to failure at a temperature chamber of 30 degrees Celsius. In each cycle, the battery is fully charged until it reaches 3.6 V and fully discharged when it reaches 2 V.

Purpose: obtain data from a single cell to analyze its performance over time.

1 cycle: Rest, charge the battery, constant voltage, rest, and discharge the battery.

```
%STEP 1- load the battery dataset into MATLAB memory and show the first five rows
dataFile=matlab.internal.examples.downloadSupportFile("predmaint","batteryagingdata/
singlecell/v1/singleCellLifeTimeData.zip");
unzip(dataFile)
load("singleCellLifeTimeData.mat")
head(data,5)
```

Data_Point	Test_Time	DateTime	Step_Time	Step_Index	Cycle_Index	Current	Voltage
1	0	13-May-2017 03:21:40	-1780	0	0	0	3.3018
2	0.0001	13-May-2017 03:21:40	-1780	0	0	0	3.3018
3	9.9983	13-May-2017 03:21:50	-1770	0	0	0	3.3018
4	20.002	13-May-2017 03:22:00	-1760	0	0	0	3.3018
5	30.001	13-May-2017 03:22:10	-1750	0	0	0	3.3018

```
%STEP 2-Select one battery cycle and only keep the period of time in which the
battery was being charged
%The following code selects solely the battery cycle with index 1
```

```

cycleData=data(data.Cycle_Index==1,:);
%To identify the cycling phases we will use the batteryTestDataParser. This
%function enables raw data visualization, aids in identifying anomalies, and
prepare high-quality data.
%The bParser is an object-parser will analyze Cycle 1
bParser=batteryTestDataParser(cycleData);
%Indicates the use of the column called current when current values are
%needed
bParser.CurrentVariable='Current';
%Indicates the use of the column called voltage when voltage values are
%needed
bParser.VoltageVariable="Voltage";
%Indicates the use of the column called DateTime when time information is
%needed
bParser.TimeVariable="DateTime";
%Indicates the use of the column called Cycle Index to know which cycle a
%measurement belongs to
bParser.CycleIndexVariable='Cycle_Index';
%Indicates the use of the column called Step Index to identify the different
%steps inside the cycle
bParser.StepIndexVariable='Step_Index';
%Use segmentData to identify the cycling phase and mode that each data
%point belongs to, and flag invalid data points.
segmentedRawDataTable=segmentData(bParser);
%Select only the data in which the battery was being charged
chargeData=segmentedRawDataTable(segmentedRawDataTable.CyclingPhases=="Charge",:);
% Convert time to seconds starting at charging beginning (makes the exact
% time in which the battery started charging to be time=0 seconds)
chargeData.DateTime = seconds(chargeData.DateTime - chargeData.DateTime(1));

%STEP 3- fit the voltage equation to the selected data
%The x variable corresponds to time and the y variable corresponds to
%voltage. Obtain these variables from charging data
t=chargeData.DateTime;
V=chargeData.Voltage;
%The battery is fully charged at 3.6 V so Vmax=3.6 V
Vmax=3.6;
%Define the capacitor charging equation  $V(t)=V_{max}(1-e^{(-t/RC)})$ , also known
%as the RC charging equation.
%Tau equals RC and it represents the time it takes for a capacitor to reach
approximately 63.2% of its max voltage. Our only unknown is tau.
rcEquation=fittype(@(tau, t) Vmax*(1-exp(-t/tau)), 'independent', 't',
'coefficients', 'tau');
%Give an initial guess for tau and create fitting options
opts=fitoptions(rcEquation);
opts.StartPoint=1000;
opts.Lower=0.0000001;
opts.Upper = 100000;
%Syntax: [fitobject,gof]=fit(x,y,fitType,fitOptions)
[fitobject,gof]=fit(t,V,rcEquation,opts);


```

```
%Display fitted time constant
fitobject
```

```
fitobject =
  General model:
  fitobject(t) = Vmax*(1-exp(-t/tau))
  Coefficients (with 95% confidence bounds):
    tau =      0.2279  (0.2096, 0.2462)
```

```
%STEP 4-Plot the data and the fitted curve in the same figure
```

```
plot(fitobject,t,V);
xlabel('Time (s)');
ylabel('Voltage (V)');
title('Battery Charging Profile and RC Model Fit');
legend('Voltage Measured','RC Model');
grid on;
% To save the visualization as a PNG image.
exportgraphics(gcf, 'TASK1_RCMODELFIT_MANUAL.png', 'Resolution', 300);
```

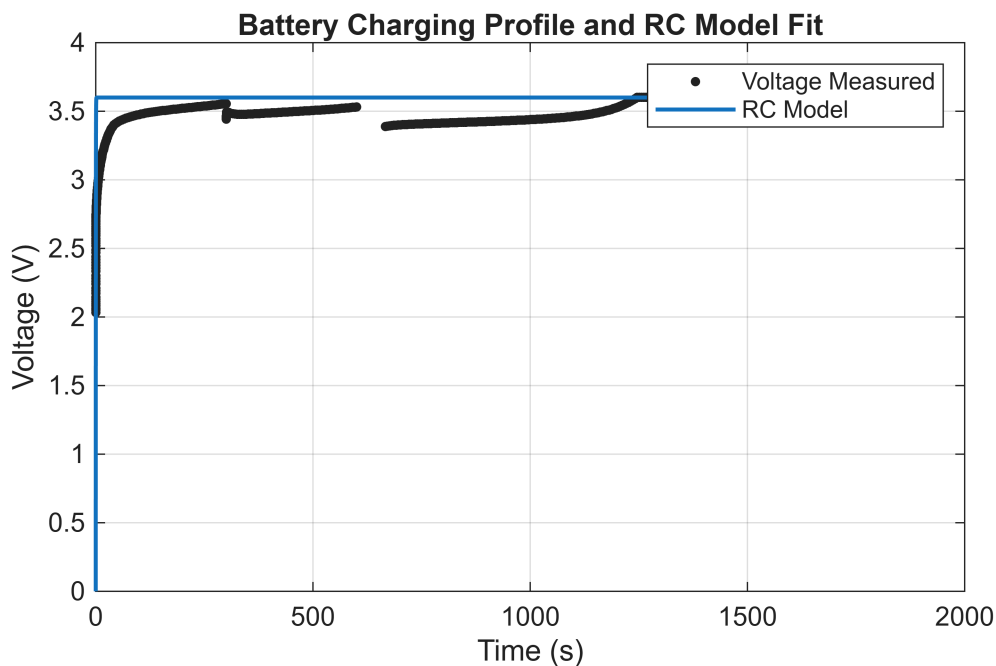

```
%STEP 5- Display the goodness of fit statistics
```

```
gof
gof =
  struct with fields:
    sse: 45.6319
    rsquare: 0.2294
    dfe: 611
    adjrsquare: 0.2294
    rmse: 0.2733
```

%%% STUFF ADDED BY LISETH%%%

%%%WE CAN USE THIS TO ARGUE THE goodness of fit statistics%%%

This curved was created using the Curve Fitter APP

The equation used is:

$$V(t) = V_0 + (V_{\max} - V_0)(1 - e^{-t/\tau})$$

Note: Vmax = 3.6 V and Vo = 2.0326 V

```
% Create RC Model Fit Plot


DateTime = chargeData.DateTime;
Voltage = chargeData.Voltage;

[fitresult, gof] = CREATE_RC_CURVE(DateTime, Voltage);

xlim("auto")
ylim("auto")
legend(["Voltage vs. DateTime", "RC Model"], "Interpreter", "none", "Location",
"none", "Position", [0.5642 0.3519 0.2968, 0.0941])

title("RC Model vs Voltage vs Time")
xlabel("DateTime (s)", "Interpreter", "none")
ylabel("Voltage (v)", "Interpreter", "none")

% To save the visualization as a PNG image.
exportgraphics(gcf, 'TASK1_RCMODELFIT_CURVEFITTERAPP.png', 'Resolution', 300);
```

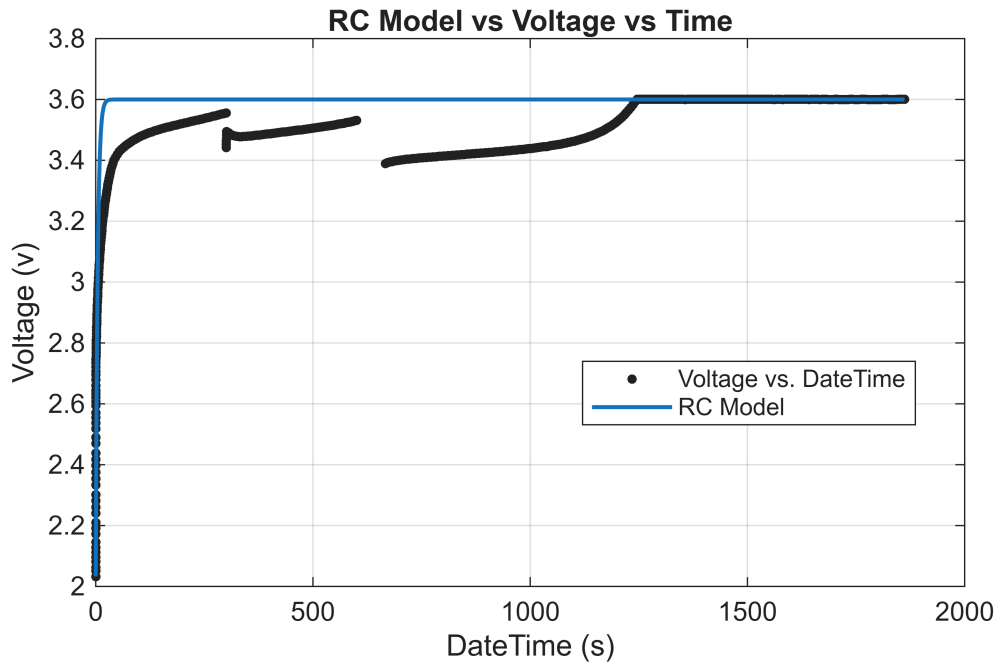

%STEP 5- Display the goodness of fit statistics

% Create variable tau = RC

% RC parameters

tau = fitresult.tau;

R = chargeData.Internal_Resistance(1);

C = tau / R;

% Goodness-of-fit table

```
FitStats = table( ...
    tau, ...
    gof.rsquare, ...
    gof.adjrsquare, ...
    gof.rmse, ...
    gof.sse, ...
    'VariableNames', ...
    {'Tau_s', 'Rsquare', 'AdjustedRsquare', 'RMSE', 'SSE'});
```

FitStats

FitStats = 1x5 table

	Tau_s	Rsquare	AdjustedRsquare	RMSE	SSE
1	4.4285	0.7294	0.7294	0.1619	16.0202

Note: R^2 is 0.7294

This value changed!

```

% Tau the time constant

% Declare Variables
tau = 4.4285;
Vo = chargeData.Voltage(1);
Vmax = 3.6;

t = linspace(0,5*tau,200);
%voltage = Vmax*(1-exp(-t/tau)); DELETE THIS
voltage = Vo + (Vmax-Vo).*(1-exp(-t/tau));

% 63.2 % out of 100%
%V63 = 0.632 * Vmax; Use this line to use tau from the original model
%starting at 0V

%OR
% Use this when using Vo = 2.0326 V
V63 = Vo + 0.632*(Vmax - Vo);

figure
plot(t,voltage,'b','LineWidth',2)
hold on

% Mark the 63.2% point
plot(tau,V63,'ro','MarkerSize',10,'MarkerFaceColor','r')


% Draw reference lines
xline(tau,'--r','\tau')
yline(V63,'--k','63.2% of V_{max}')

text(tau,V63,...
    sprintf(' (%.4f, %.3f V)',tau,V63),...
    'VerticalAlignment','bottom')

xlabel('Time (S)')
ylabel('Voltage (V)')
title('RC Charging Curve with Time Constant')
grid on
legend('RC Fit','63.2% Point','Location','southeast')

% To save the visualization as a PNG image.
exportgraphics(gcf, 'TASK1_RCCURVE_TIMECONSTANT.png', 'Resolution', 300);

```

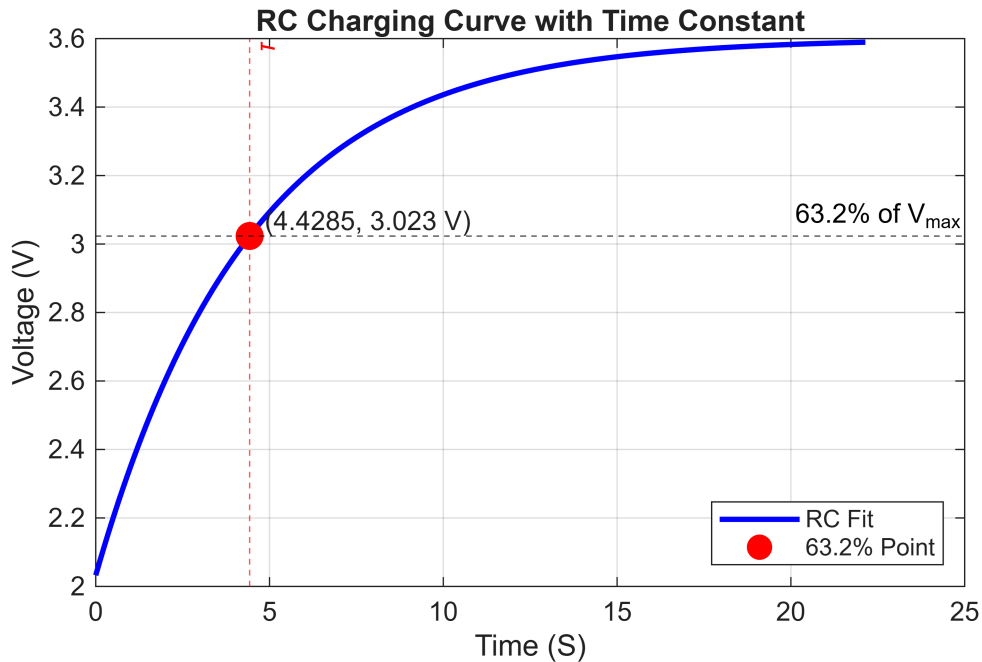

Task 2: Plot the electrical terms that express how energy moves in a circuit

To visualize the battery's charging policy, write code to visualize the current, voltage, and power measurements for one charging cycle. Present the visualization as one figure with three subplots, one each for:

- Voltage vs. time
- Current vs. time
- Power vs. time

```
chargeData=segmentedRawDataTable(segmentedRawDataTable.CyclingPhases=="Charge" &
segmentedRawDataTable.Cycle_Index==1 & segmentedRawDataTable.IsValid==true,:);
chargeData.DateTime = seconds(chargeData.DateTime - chargeData.DateTime(1));
% Filter out the irregular data points.
```

```
% STEP 1
```

```
% Create a figure handle and initialize the first subplot. Plot voltage vs.
% time.
```

```
fig = figure;
```

```
% To create the figure handle.
```

```
subplot(3, 1, 1);
```

```
% Because general format is subplot(number_of_rows, number_of_columns,
% position), 3 rows refer to the 3 different subplots (Voltage vs. Time,
% Current vs. Time, and Power vs. Time), the 1 column stacks the three
% subplots vertically satisfying the condition that they be presented as
% a visualization with one figure, and lastly, the position is 1 referring
% to the first subplot Voltage vs. Time.
```

```
plot(chargeData.DateTime, chargeData.Voltage, 'b-', 'LineWidth', 2)
```

```

% Because general format is plot(x, y, 'type of color + line style',
% 'optionally enlarge line width', value for linewidth), for subplot 1
% time is the x axis, voltage is the y axis, color of the line of plot is
% self-dictated as blue, and width of line is increased to 2 for better
% visibility.
xlabel('Time (s)');
% To name the x-axis as its represented value time.
ylabel('Voltage (V)');
% To name the y-axis as its represented value voltage.
title('Voltage vs. Time');
% To name the title
grid on;
% To display grid lines for visibility.


% STEP 2
% Use a second subplot to plot current vs. time.
subplot(3, 1, 2);
% Once again, general format remains the same, only change: the position is
% 2 now and refers to the second subplot
% Current vs. Time.
plot(chargeData.DateTime, chargeData.Current, 'g-', 'LineWidth', 2)
% General format remains the same, changes: y axis is now current,
% self-dictated color of line is now green.
xlabel('Time (s)');
% To name the x-axis as its represented value time.
ylabel('Current (A)');
% To name the y-axis as its represented value current.
title('Current vs. Time');
% To name the title
grid on;
% To display grid lines for visibility.

% STEP 3
% Use a third subplot to plot power vs time.
% Hint:  $P = I * V$  where I is current in amps. You will first
% need to compute power before you can create this plot.
chargeData.Power = chargeData.Voltage .* chargeData.Current;
% Compute power by using element-by-element operator '.*' and the
% equation  $P = I * V$ .
subplot(3, 1, 3);
% Once again, general format remains the same, only change: the position is
% 3 now and refers to the third subplot
% Power vs. Time.
plot(chargeData.DateTime, chargeData.Power, 'r-', 'LineWidth', 2)
% General format remains the same, changes: y axis is now power,
% self-dictated color of line is now red.
xlabel('Time (s)');
% To name the x-axis as its represented value time.
ylabel('Power (W)');
% To name the y-axis as its represented value power.

```

```
title('Power vs. Time');  
% To name the title.  
grid on;  
% To display grid lines for visibility.  
  
sgtitle('Battery Charging Cycle: Voltage, Current, and Power');  
% To have a cumulative title summarizing the purpose of all 3 subplots.  
  
set(gcf, 'position', [100, 50, 800, 900]);  
% Change dimensions of graph for visibility.  
  
exportgraphics(fig, 'TASK2_PLOTS_VOLTAGECURRENTPOWER_VS_TIME.png', 'Resolution',  
300);
```

Battery Charging Cycle: Voltage, Current, and Power

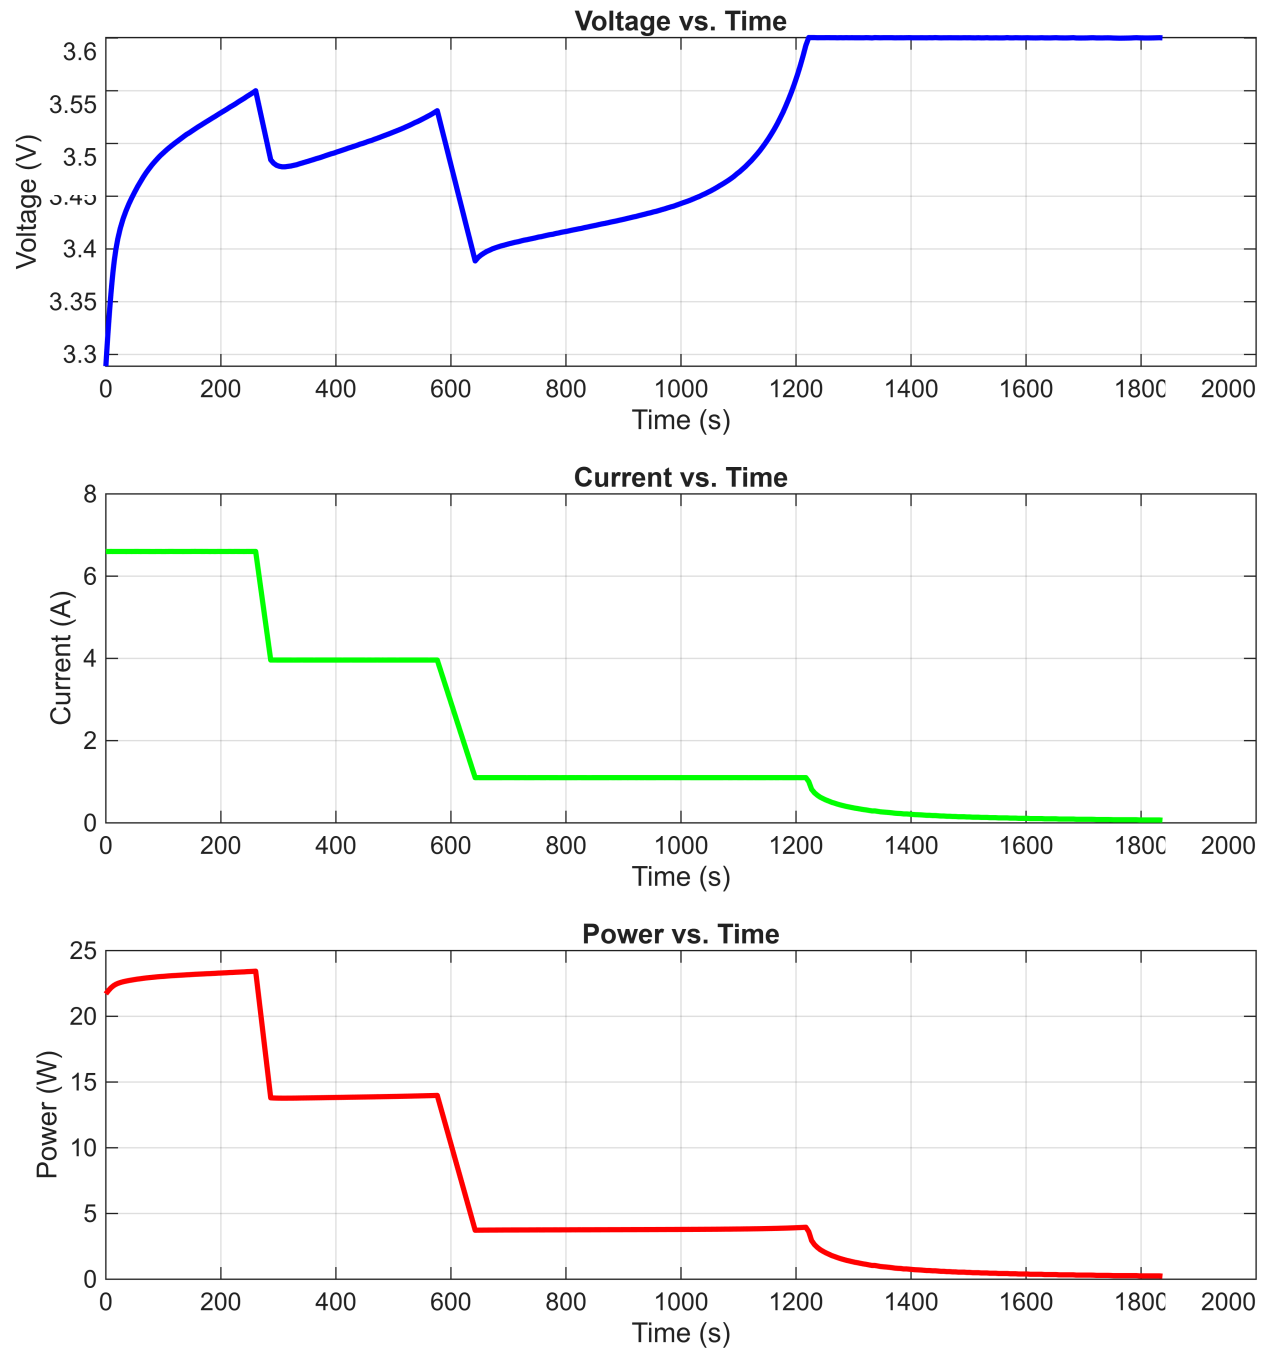

% To save the visualization as a PNG image.

Task 3: Compute analytical results

3.1 Conduct a rate-of-change analysis by computing the derivative at key intervals in the voltage data:

Compute the voltage derivative:


The rate of change of voltage with respect to time.

```
% Variables
time = chargeData.DateTime;
% Raw data
dVdt = chargeData("dV/dt");

% dVdt tells us how quickly the voltage is charging at each
% point in time during the charging cycle.

figure
plot(time, dVdt)
xlabel('Time (s)')
ylabel('dV/dt (V/s)')
title('Rate of Change of Voltage During Charging')
grid on

% To save the visualization as a PNG image.
exportgraphics(gcf, 'TASK3_DVDT_VS_TIME.png', 'Resolution', 300);
```

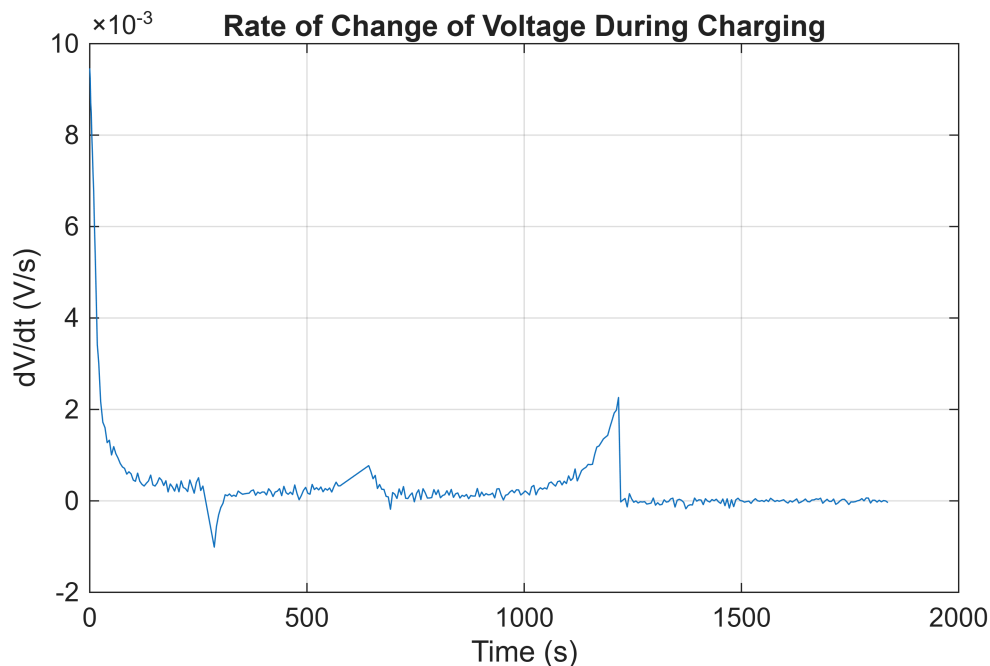

```
%xlim([-8 195])
%ylim([-0.020 0.071])

% UNCOMMENT THE LINE OF CODE BELOW TO SEE ALL THE DATA OF CYCLE 1
%openvar('chargeData');
```

```
%openvar("dVdt")
```

Compute the rate of voltage at different key time intervals:

```
% Rate of voltage change at key intervals

% Computed dV/dt from voltage and time
dVdt_Compute = gradient(chargeData.Voltage, chargeData.DateTime);

% dV/dt provided in the raw dataset
dVdt_Raw = chargeData("dV/dt");

% Representative indices
idxBeginning = 1;
idxMiddle = round(length(dVdt_Compute)/2);
idxEnd = length(dVdt_Compute);

% Computed values
dVdt_beginning = dVdt_Compute(idxBeginning);
dVdt_middle = dVdt_Compute(idxMiddle);
dVdt_end = dVdt_Compute(idxEnd);
dVdt_Cmax = max(dVdt_Compute);
dVdt_Cmin = min(dVdt_Compute);

% Raw-data values
dVdt_beginning_RD = dVdt_Raw(idxBeginning);
dVdt_middle_RD = dVdt_Raw(idxMiddle);
dVdt_end_RD = dVdt_Raw(idxEnd);
dVdt_max = max(dVdt_Raw);
dVdt_min = min(dVdt_Raw);

% Display computed values
fprintf('\nComputed dV/dt values\n');
```

Computed dV/dt values

```
fprintf('Beginning: %.6f s, dV/dt = %.6f V/s\n', ...
        time(idxBeginning), dVdt_beginning);
```

Beginning: 0.000000 s, dV/dt = 0.009005 V/s

```
fprintf('Middle: %.6f s, dV/dt = %.6f V/s\n', ...
        time(idxMiddle), dVdt_middle);
```

Middle: 952.148200 s, dV/dt = 0.000164 V/s

```
fprintf('End: %.6f s, dV/dt = %.6f V/s\n', ...
```

```
time(idxEnd), dVdt_end);
```

End: 1837.158000 s, dV/dt = 0.000159 V/s

```
fprintf('Maximum computed dV/dt: %.6f V/s\n', dVdt_Cmax);
```

Maximum computed dV/dt: 0.009005 V/s

```
fprintf('Minimum computed dV/dt: %.6f V/s\n', dVdt_Cmin);
```

Minimum computed dV/dt: -0.002202 V/s

```
% Display raw-data values
```

```
fprintf('\nRaw-data dV/dt values\n');
```

Raw-data dV/dt values

```
fprintf('Beginning: %.6f s, dV/dt = %.6f V/s\n', ...  
time(idxBeginning), dVdt_beginning_RD);
```

Beginning: 0.000000 s, dV/dt = 0.009459 V/s

```
fprintf('Middle: %.6f s, dV/dt = %.6f V/s\n', ...  
time(idxMiddle), dVdt_middle_RD);
```

Middle: 952.148200 s, dV/dt = 0.000018 V/s

```
fprintf('End: %.6f s, dV/dt = %.6f V/s\n', ...  
time(idxEnd), dVdt_end_RD);
```

End: 1837.158000 s, dV/dt = -0.000038 V/s

```
fprintf('Maximum raw-data dV/dt: %.6f V/s\n', dVdt_max);
```

Maximum raw-data dV/dt: 0.009459 V/s

```
fprintf('Minimum raw-data dV/dt: %.6f V/s\n', dVdt_min);
```

Minimum raw-data dV/dt: -0.001013 V/s

```
% Plot computed and raw-data dV/dt
```

```
figure  
plot(time, dVdt_Compute, 'LineWidth', 1.5)  
hold on  
plot(time, dVdt_Raw, '--', 'LineWidth', 1.5)
```

```
% Mark representative computed values
```

```
plot(time(idxBeginning), dVdt_beginning, 'o', ...  
      'MarkerSize', 8, 'MarkerFaceColor', 'auto')
```

```

plot(time(idxMiddle), dVdt_middle, 'o', ...
      'MarkerSize', 8, 'MarkerFaceColor', 'auto')

plot(time(idxEnd), dVdt_end, 'o', ...
      'MarkerSize', 8, 'MarkerFaceColor', 'auto')

% Mark representative raw-data values
plot(time(idxBeginning), dVdt_beginning_RD, 's', ...
      'MarkerSize', 8)


plot(time(idxMiddle), dVdt_middle_RD, 's', ...
      'MarkerSize', 8)

plot(time(idxEnd), dVdt_end_RD, 's', ...
      'MarkerSize', 8)

xlabel('Time (s)')
ylabel('dV/dt (V/s)')
title('Comparison of Computed and Raw-Data Voltage Change Rates')
legend('Computed dV/dt', ...
      'Raw-data dV/dt', ...
      'Computed beginning', ...
      'Computed middle', ...
      'Computed end', ...
      'Raw beginning', ...
      'Raw middle', ...
      'Raw end', ...
      'Location', 'best')
grid on
hold off

% To save the visualization as a PNG image.
exportgraphics(gcf, 'TASK3_DVDT_COMPUTED_VS_RAW.png', 'Resolution', 300);

```

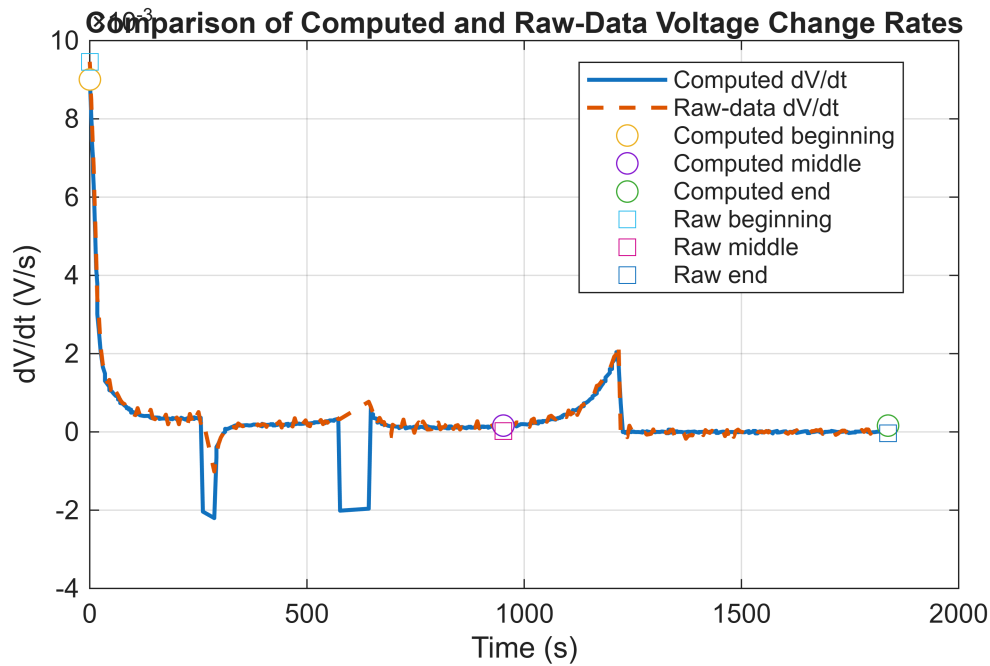

```
%xlim([-17 167])
%ylim([-0.048 0.413])
```

The values calculated at the beginning, middle, and end represent the instantaneous rate of voltage change at different stages of charging.

```
% Constant current vs constant voltage
time      = chargeData.DateTime;
voltage   = chargeData.Voltage;
current   = chargeData.Current;
% Raw data
%dVdt     = chargeData("dV/dt");

% Transition from CC to CV
% CV begins when voltage reaches 99% of its maximum value
% Voltage Threshold = 0.99*3.60=3.564
voltageThreshold = 0.99 * max(voltage);

idx_transition = find(voltage >= voltageThreshold, 1, 'first');


% Indices for each charging region
idx_CC = 1:idx_transition-1;
idx_CV = idx_transition:length(time);
```

figure

```
subplot(2,1,1)
plot(time, voltage, 'LineWidth', 1.5)
hold on
xline(time(idx_transition), '--', 'CC to CV')
ylabel('Voltage (V)')
title('Voltage vs Time')
grid on

subplot(2,1,2)
plot(time, current, 'LineWidth', 1.5)
hold on
xline(time(idx_transition), '--', 'CC to CV')
xlabel('Time')
ylabel('Current (A)')
title('Current vs Time')
grid on

% To save the visualization as a PNG image.
exportgraphics(gcf, 'TASK3_CC_VS_CV_VOLTAGECURRENT.png', 'Resolution', 300);
```

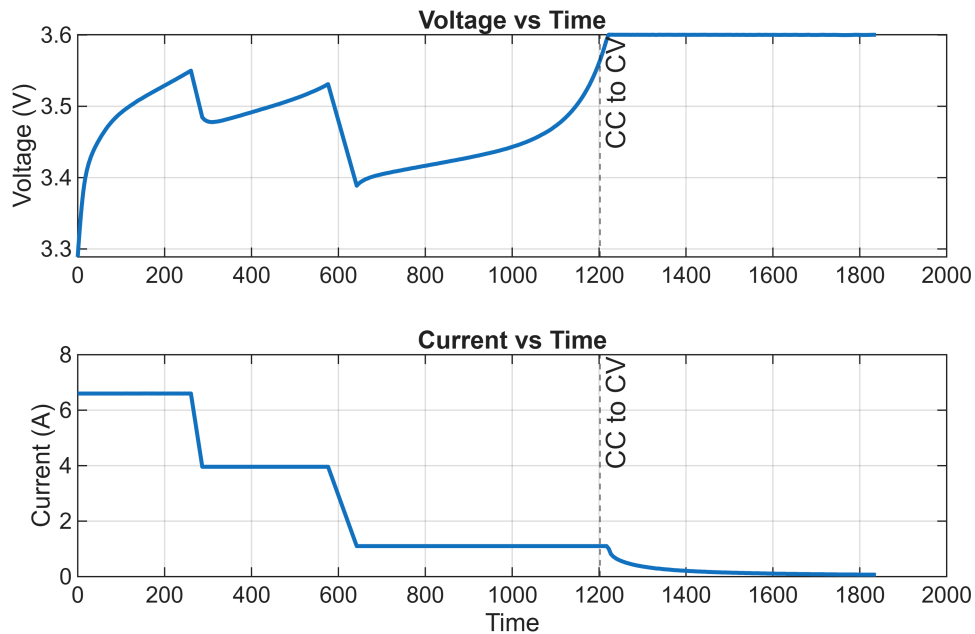

%%% After adding this line to code in task 1: & segmentedRawDataTable.IsValid==true,;)

%%% Maybe this part is no needed.

```
% Keep only valid charge data
validCharge = chargeData.IsValid & ...
    chargeData.CyclingPhases == "Charge";

data = chargeData(validCharge,:);
```

```

% Variables
time = data.DateTime;
dVdt = data("dV/dt");

% Constant-Current (CC) data
CC = data.CyclingModes == "CC";

timeCC = time(CC);
dVdtCC = dVdt(CC);


% Constant-Voltage (CV) data
CV = data.CyclingModes == "CV";

timeCV = time(CV);
dVdtCV = dVdt(CV);

% Plot dV/dt during CC charging
figure
plot(timeCC, dVdtCC,'LineWidth',1.5)
xlabel('Time (s)')
ylabel('dV/dt (V/s)')
title('dV/dt During Constant-Current (CC) Charging')
grid on

% To save the visualization as a PNG image.
exportgraphics(gcf, 'TASK3_DVDT_CC_PHASE.png', 'Resolution', 300);

```

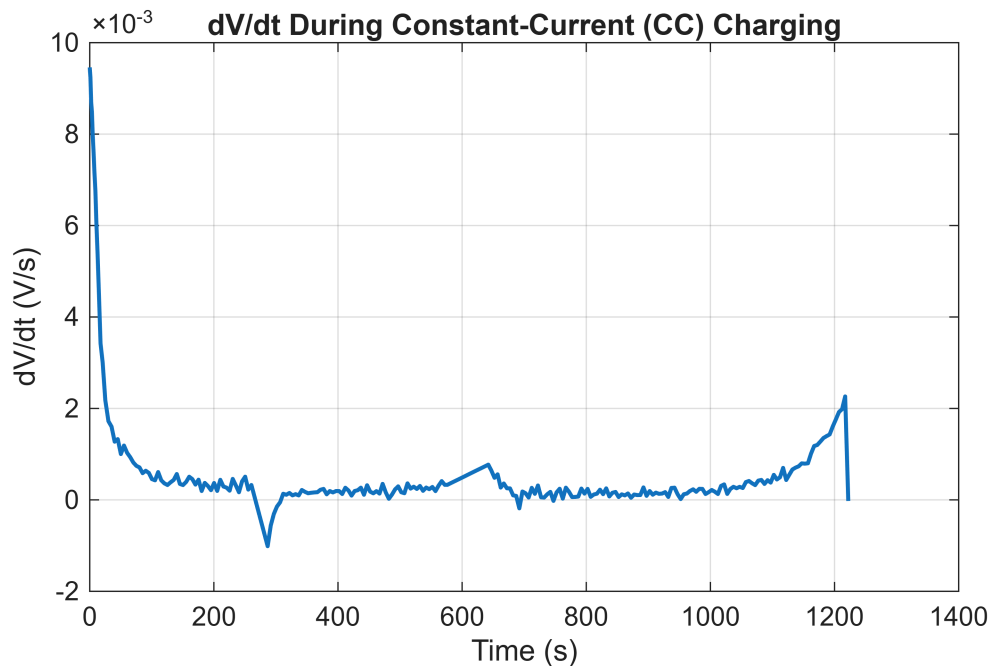

```

% Plot dV/dt during CV charging
figure
plot(timeCV, dVdtCV,'LineWidth',1.5)


```

```

xlabel('Time (s)')
ylabel('dV/dt (V/s)')
title('dV/dt During Constant-Voltage (CV) Charging')
grid on

% To save the visualization as a PNG image.
exportgraphics(gcf, 'TASK3_DVDT_CV_PHASE.png', 'Resolution', 300);

```

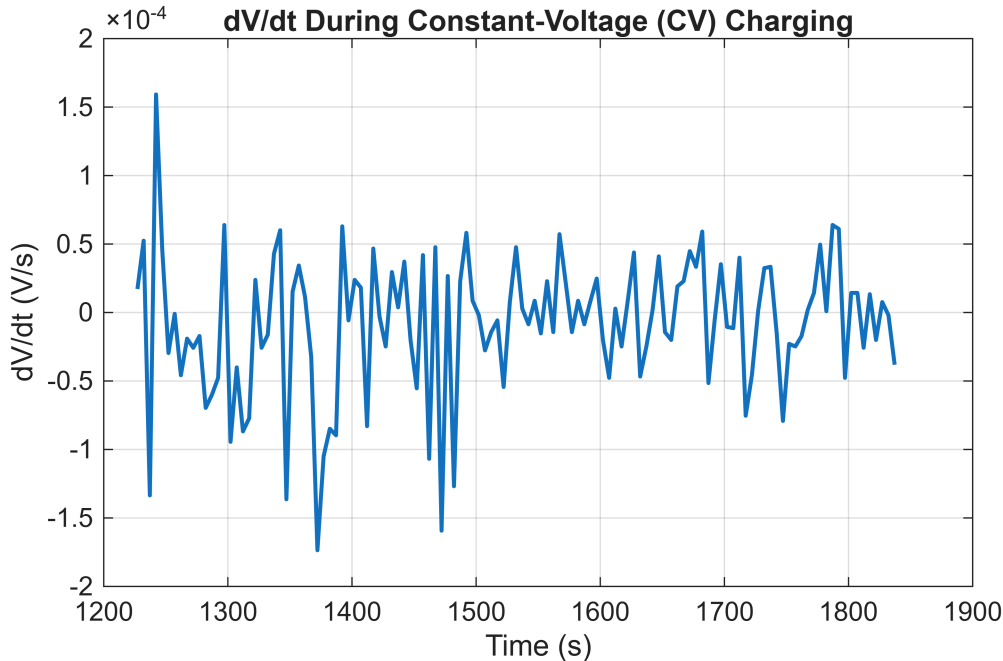

3.2 Compute the time required to reach 80% and 100% charge:

```

% Declare Variables
% Maximum charge capacity
% When battery reaches 100% approximately 3.6V
maxCapacity = max(chargeData.Charge_Capacity);

% 80% of the maximum capacity
capacity80 = 0.8 * maxCapacity;

% Find the data point when 80% and 100% are reached:

% Find when the battery reaches 80%
charge80 = find(chargeData.Charge_Capacity >= capacity80, 1, 'first');
% Find when the battery reaches 100%
charge100 = find(chargeData.Charge_Capacity >= maxCapacity, 1, 'first');

% Convert data point position to time
time80 = time(charge80);
time100 = time(charge100);

% Display the times

```

```
fprintf('Time to reach 80%% charge =%.6f s\n', time80);
```

Time to reach 80% charge =572.098800 s

```
fprintf('Time to reach 100%% charge =%.6f s\n', time100);
```

Time to reach 100% charge =1837.158000 s

3.2.1 The following code displays a visual plot of the charging process, highlighting the points at which the battery reaches 80% and 100% charge. The 100% charge level represents the maximum charge capacity recorded during Cycle1.

```
% Plot Charge Capacity vs Time
```

```
figure
```

```
plot(time, chargeData.Charge_Capacity, 'b', 'LineWidth', 1.5)
```

```
% To keep the current graph and add plots to it
```

```
hold on
```

```
% Mark the 80% charge point
```

```
% The red circle identifies the point at which the battery reaches 80% charge.
```

```
plot(time80, chargeData.Charge_Capacity(charge80), 'ro', 'MarkerSize', 8, 'LineWidth', 2)
```

```
% Mark the 100% charge point
```

```
% The green circle identifies the point at which the battery reaches 100% charge.
```

```
plot(time100, chargeData.Charge_Capacity(charge100), 'go', 'MarkerSize', 8, 'LineWidth', 2)
```

```
% Display the points when the battery reaches 80% and 100% charge
```

```
text(time80 + 30, chargeData.Charge_Capacity(charge80), + 0.01, '80%', 'Color', 'black')
```

```
text(time100 + 30, chargeData.Charge_Capacity(charge100), +0.01, '100%', 'Color', 'black')
```

```
% Display the plot
```

```
xlabel('Time (s)')
```

```
ylabel('Charge Capacity (Ah)')
```

```
title('Charge Capacity vs Time')
```


```
legend('Charge Capacity', '80% Charge', '100% Charge', 'Location', 'southoutside')
```

```
xlim([127 1945])
```

```
ylim([0.04 1.13])
```

```
% To save the visualization as a PNG image.
```

```
exportgraphics(gcf, 'TASK3_CHARGECAPACITY_80_100.png', 'Resolution', 300);
```

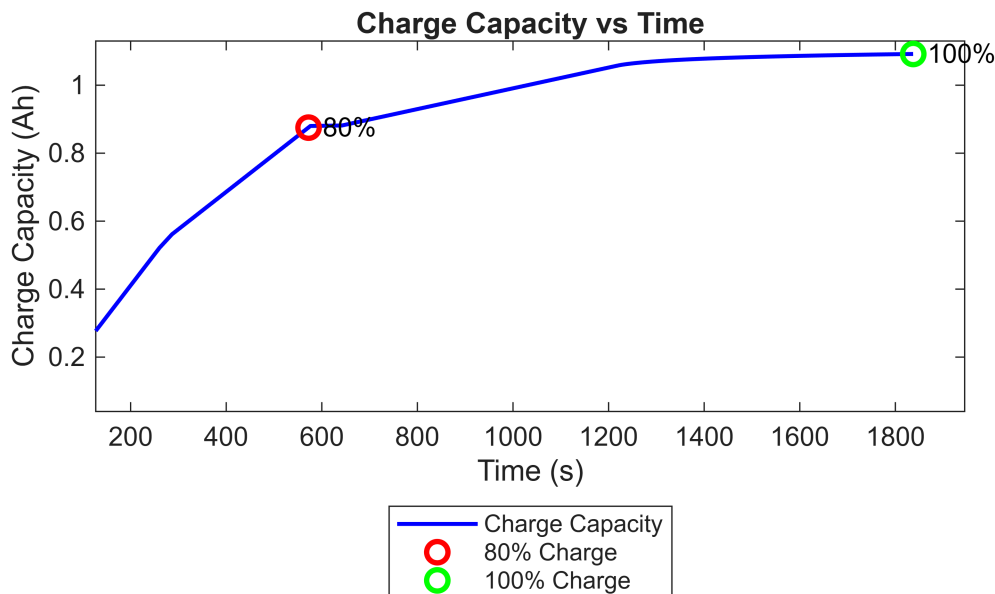

3.3 Compute the total energy delivered to the battery by using integration to calculate the area under the power-time curve.

The instantaneous power tells us how fast electrical energy is being delivered to the battery at each moment during the charging process.

Power is:

$$P(t) = V(t)I(t)$$

Then calculate the total energy delivered:

$$E = \int_{t_i}^{t_f} P(t)dt$$

```
% Calculate the Energy delivered

% First calculate instantaneous power in watts
% Use (.* )
power = voltage .* current;

% Calculate the area under the power-time curve
% Which is the total energy delivered in joules
energy = trapz(time, power);

% Display the result
fprintf('Total energy delivered = %.2f J\n', energy);
```


Total energy delivered = 13712.89 J

```
% Power-Time curve represent the total energy delivered
figure
area(time, power, 'FaceAlpha', 0.3)
hold on
plot(time, power, 'b', 'LineWidth',1.5)

xlabel('Time (s)')
ylabel('Power (W)')
title('Power-Time Curve During Battery Charging')
legend('Area representing energy', 'Instantaneous power', 'Location', 'best')

grid on

% To save the visualization as a PNG image.
exportgraphics(gcf, 'TASK3_POWERTIMECURVE_ENERGY.png', 'Resolution', 300);
```

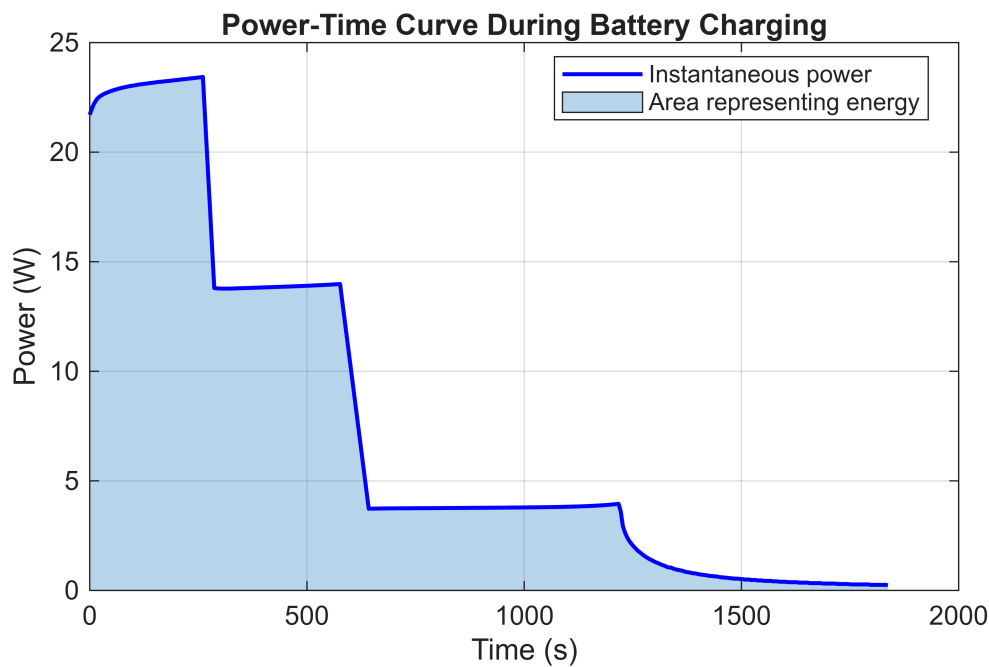

The power-time curve shows that the battery initially receives the highest charging power. As charging progresses, the charger transition through different charging stages, reducing the charging current and therefore, the charging power. During the final stage, the power gradually decreases as the battery approaches full charge. The area under the curve is the total energy delivered.

3.4 Estimate the energy loss due to the battery's internal resistance

Apply Joule's Law:

The heating formula estimate power loss in watts.

Power Loss: $P_{\text{loss}} = I^2 R$

The Energy loss is given as:

Energy Loss: $E_{\text{loss}} = P_{\text{loss}} * t$

```
% Check is the internal resistance is constant
unique(chargeData.Internal_Resistance ...
)
```

```
ans = 2x1
    0.0170
    0.0176
```

Note: The internal resistance varies slightly overtime.

```
% Estimate Resistive energy loss

% Get internal resistance
R = chargeData.Internal_Resistance;
% Instantaneous Resistive power loss (W)
powerLoss = current.^2 .* R;

% Total Resistive energy loss (J)
energyLoss = trapz(time, powerLoss);

% Display values
fprintf('Total resistive energy loss = %.2f J\n', energyLoss);
```

```
Total resistive energy loss = 316.23 J
```

```
% Plot Power Loss vs Time


figure
% The area represents the energy loss
area(time, powerLoss, 'FaceAlpha', 0.3)
hold on
plot(time, powerLoss, 'LineWidth', 1.5)

xlabel('Time (s)')
ylabel('Power Loss (W)')
title('Resistive Power Loss During Charging')
legend('Area representing energy loss', 'Instantaneous power loss', 'Location',
'best')

grid on

% To save the visualization as a PNG image.
```

```
exportgraphics(gcf, 'TASK3_RESISTIVEPOWERLOSS.png', 'Resolution', 300);
```

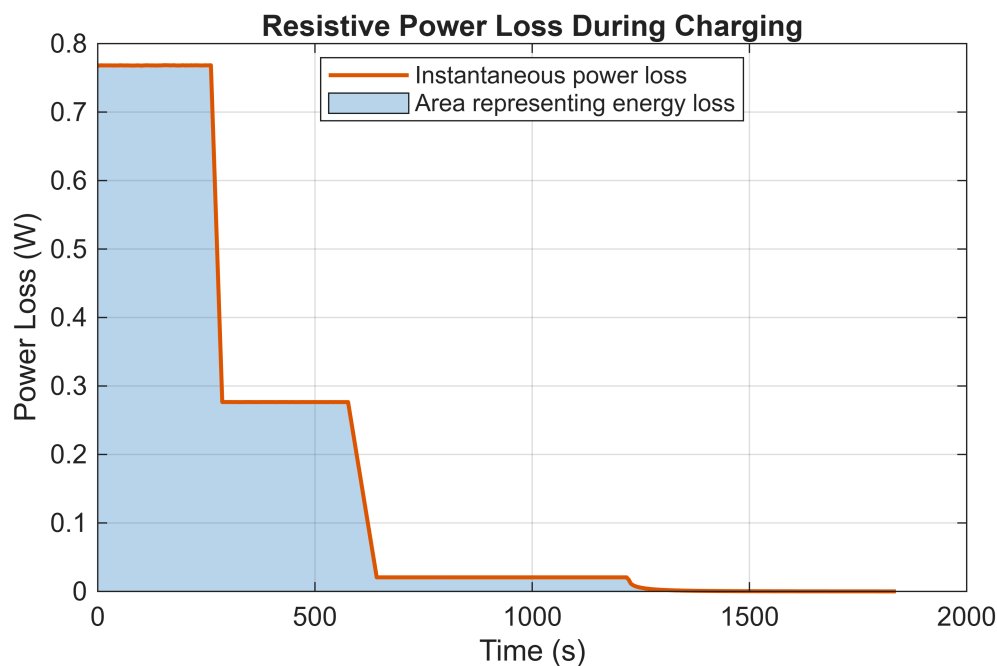

3.5 Save the results to a summary table.

```
% Create summary table
% The results in the summary table correspond to the charging portion of
% Cycle 1.
```

```
summaryTable = table( ...
    dVdt_beginning, dVdt_middle, dVdt_end, ...
    dVdt_beginning_RD, dVdt_middle_RD, dVdt_end_RD, ...
    dVdt_Cmax, dVdt_Cmin, ...
    dVdt_max, dVdt_min, ...
    time80, time100, ...
    energy, energyLoss, ...
    'VariableNames', { ...
    'Computed_dVdt_Beginning', ...
    'Computed_dVdt_Middle', ...
    'Computed_dVdt_End', ...
    'Raw_dVdt_Beginning', ...
    'Raw_dVdt_Middle', ...
    'Raw_dVdt_End', ...
    'Computed_dVdt_Max', ...
    'Computed_dVdt_Min', ...
    'Raw_dVdt_Max', ...
    'Raw_dVdt_Min', ...
    'Time_80', ...
```

```
'Time_100', ...  
'Energy_Delivered', ...  
'Resistive_Energy_Loss'}));
```

```
disp(summaryTable)
```

<u>Computed_dVdt_Beginning</u>	<u>Computed_dVdt_Middle</u>	<u>Computed_dVdt_End</u>	<u>Raw_dVdt_Beginning</u>	<u>Raw_dVdt_Middle</u>
0.0090051	0.00016396	0.00015873	0.0094595	1.812e-05