

Willie Finder tracker — first-pass schematic (not yet reviewed, not for fabrication)


USB-C, ESD, charger (77 mA), battery

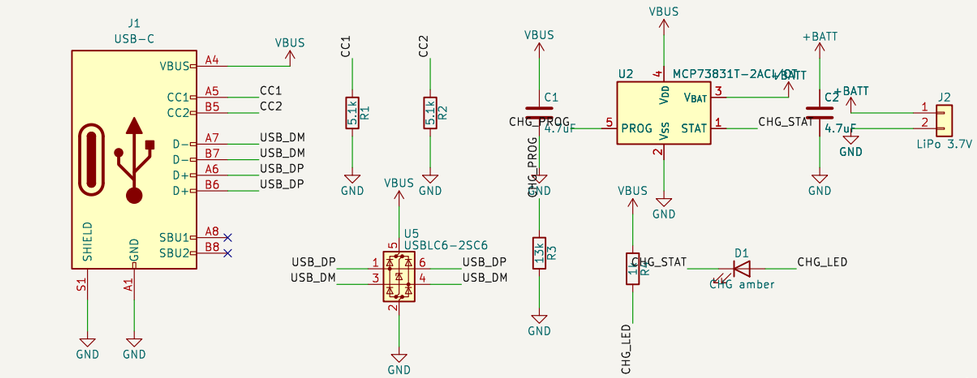


3.3 V regulator and battery sense (same divider as RAK4631 firmware expects)

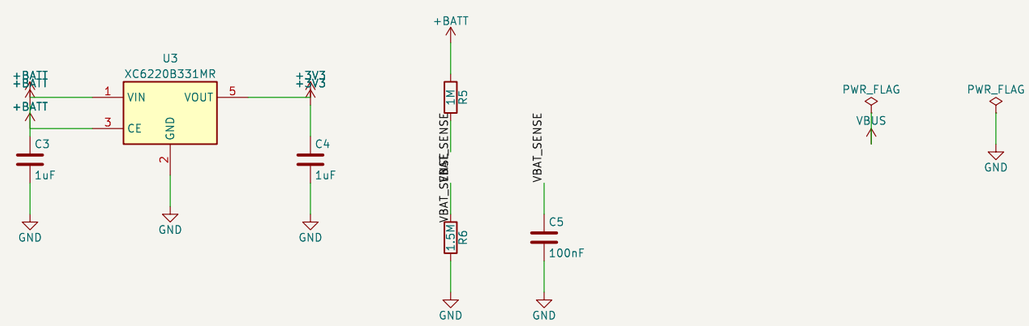


RAK4630: nRF52840 + SX1262. Pin use mirrors the Meshtastic rak4631 variant

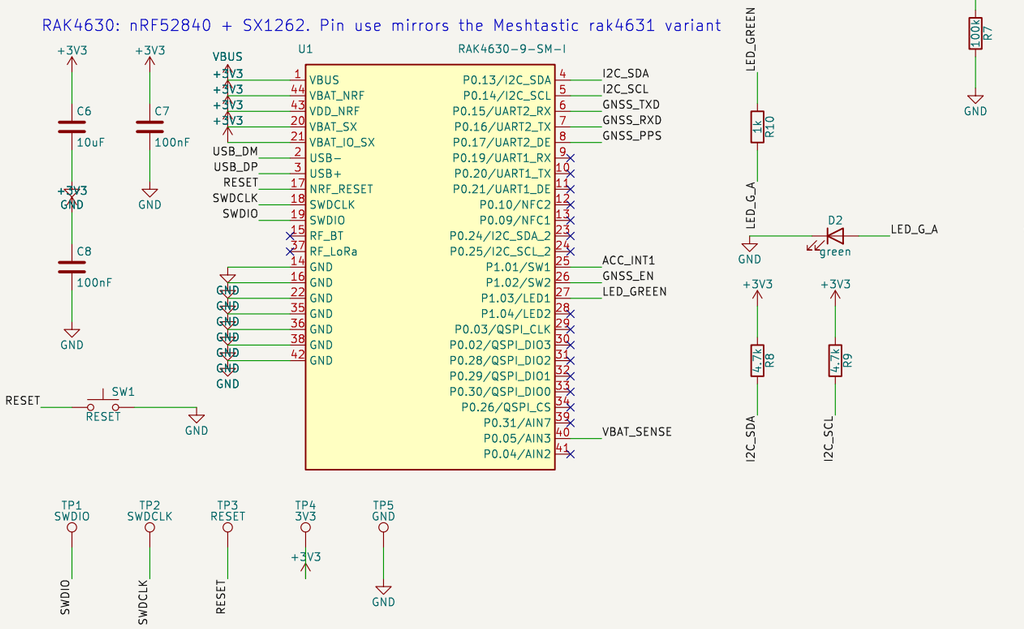

GNSS on a switched rail (GNSS_EN = P1.02, high = on)

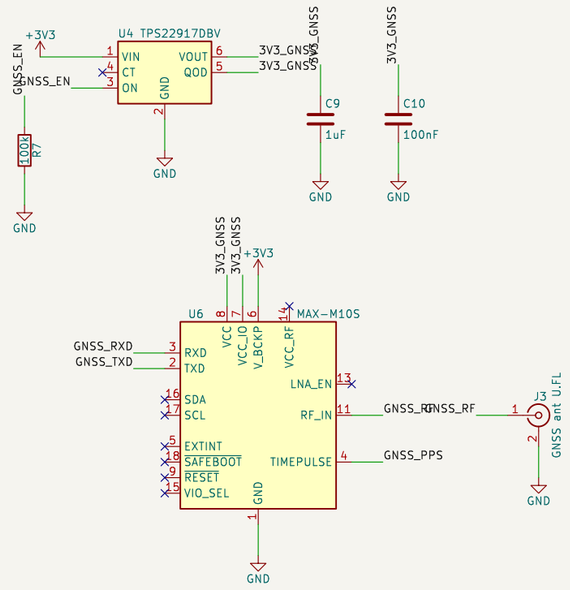

Accelerometer, I2C address 0x18

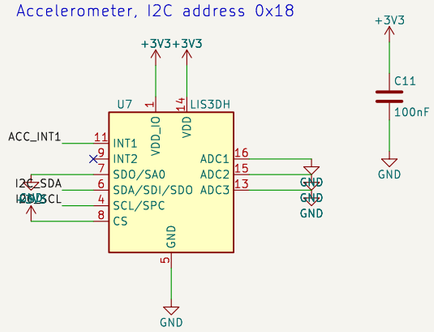

LoRa and Bluetooth antennas plug into the U.FL sockets on the RAK4630 itself (−I variant).

MAX-M10S VIO_SEL left open = 3.3 V I/O (check against the u-blox integration manual).

Battery must have its own protection circuit; none on this board.

First pass, generated from pcb/gen_schematic.py. Needs review before layout.

Sheet: /		
File: willie_tracker.kicad_sch		
Title: Willie Finder tracker		
Size: A3	Date:	**Rev: 0.1 draft**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1