


Introduction to Assembly and RISC-V

Reminders:


- Lab 1 released today
- Lab hours begin tomorrow
- Sign up for piazza

“General Purpose” Processor

- It would be highly desirable if the same hardware could execute programs written in Python, Java, C, or any high-level language
- It is also not sensible to execute every feature of a high-level language directly in hardware

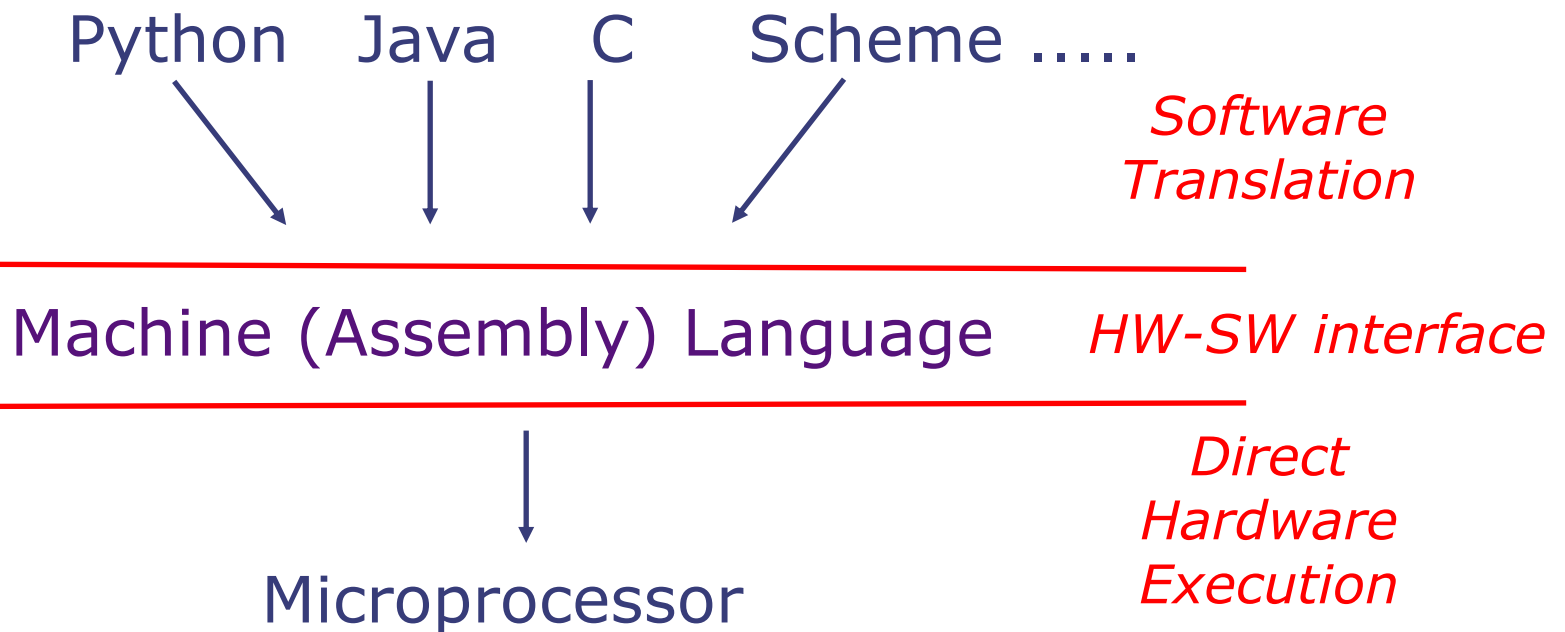

Components of a MicroProcessor

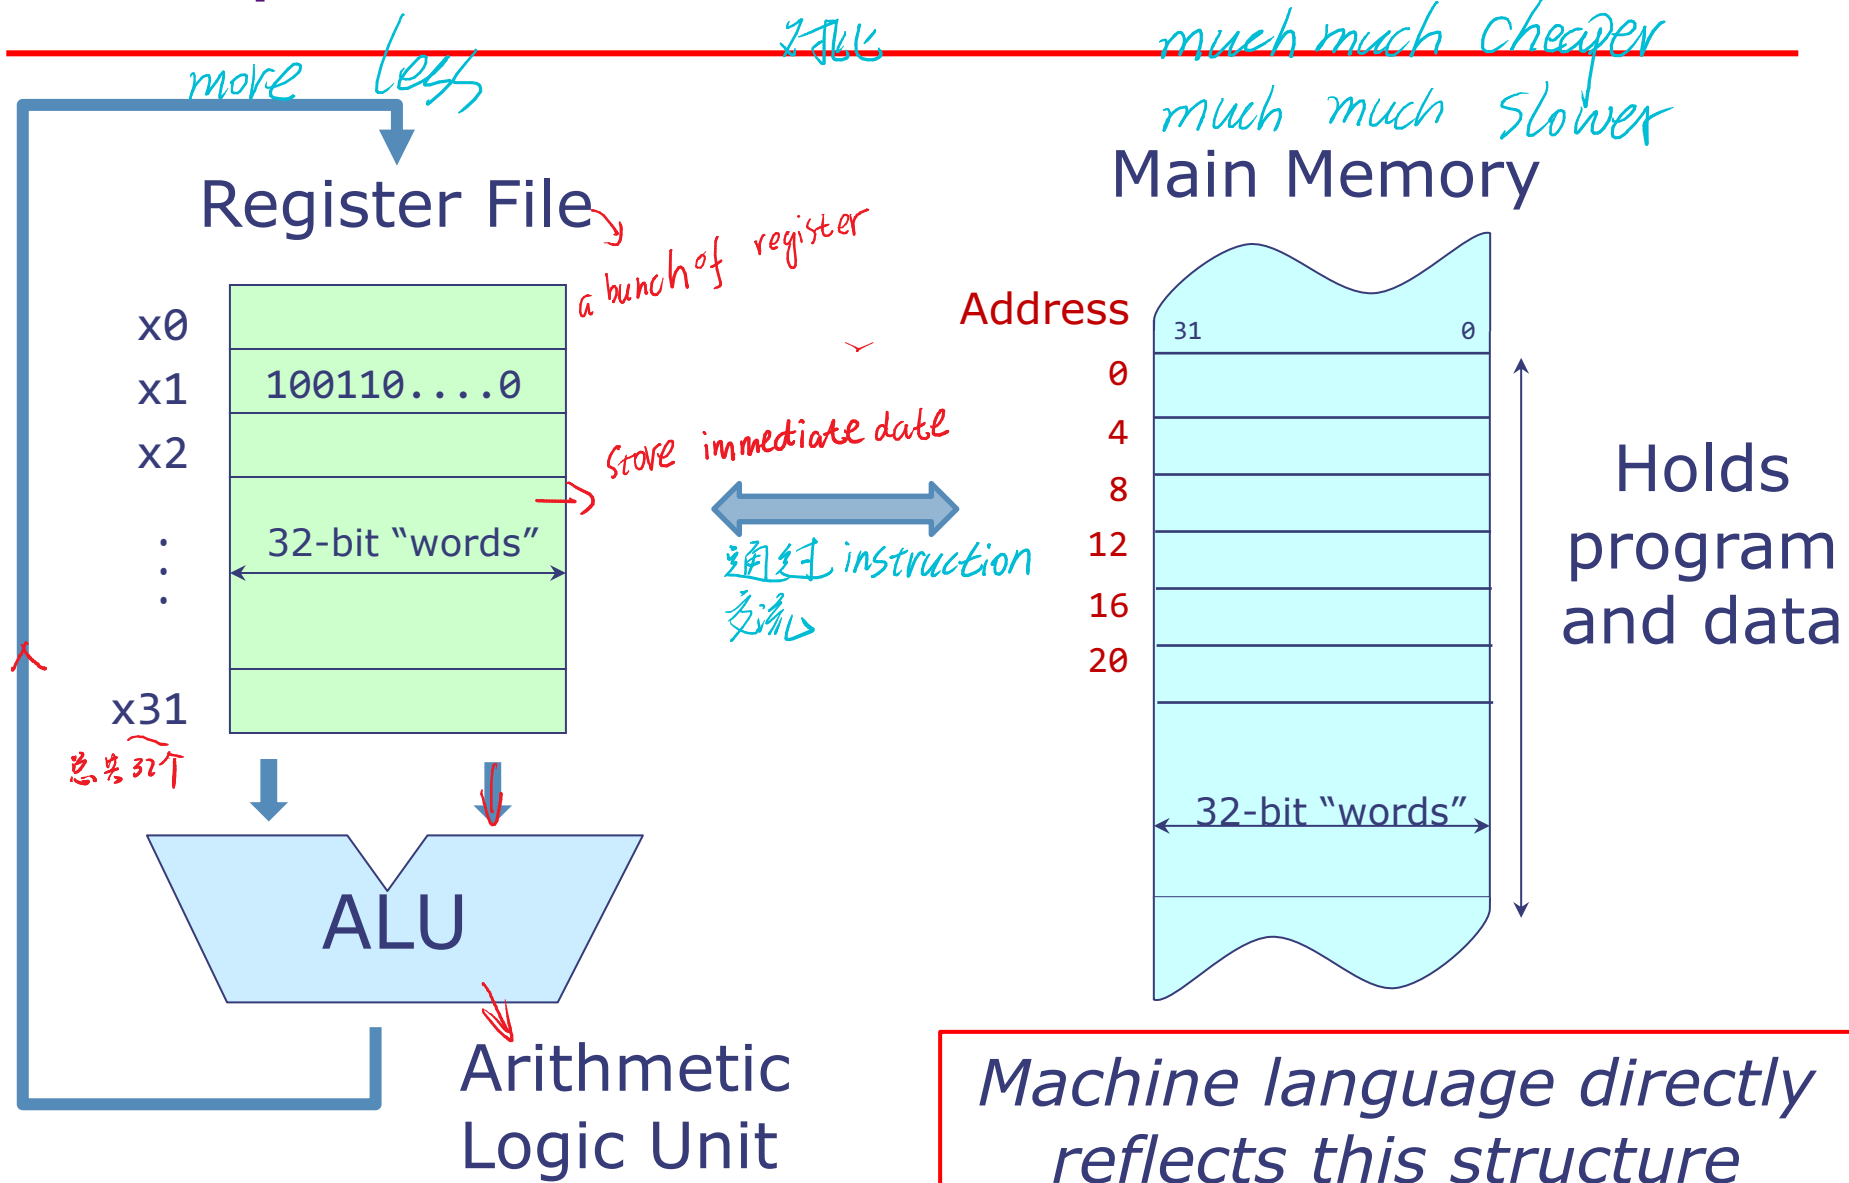

MicroProcessor Structure / Assembly Language

- Each register is of fixed size, say 32 bits
- The number of registers are small, say 32 其他处理器寄存器可更多
- ALU directly performs operations on the register file, typically
 - $x_i \leftarrow \text{Op}(x_j, x_k)$ where $\text{Op} \in \{+, \text{AND}, \text{OR}, <, >, \dots\}$
- Memory is large, say Giga bytes, and holds program and data
- Data can be moved back and forth between Memory and Register File using load and store instructions

Assembly (Machine) Language Program

XXXXXXXXXXXXXXXXXXXX

XXXXXXXXXXXXXXXXXXXX

- An assembly language program is a sequence of instructions which execute in a sequential order unless a control transfer instruction is executed
- Each instruction specifies an operation supported by the processor hardware
 - ALU
 - Load or Store
 - Control transfer: e.g., if $x_i < x_j$ go to label l

Program to sum array elements

$$\text{sum} = a[0] + a[1] + a[2] + \dots + a[n-1]$$


```
x1 ← load(base)
x2 ← load(n)
x3 ← 0
loop:
  x4 ← load(Mem[x1])
  add x3, x3, x4
  x3 = x3 + x4
  addi x1, x1, 4
  x1 = x1 + 4
  addi x2, x2, -1
  x2 = x2 - 1
  bnez x2, loop
  x2 = 0 停止loop

store(sum) ← x3
```

Register File

x1	Addr of a[i]
x2	n
x3	sum
x10	100

Main Memory

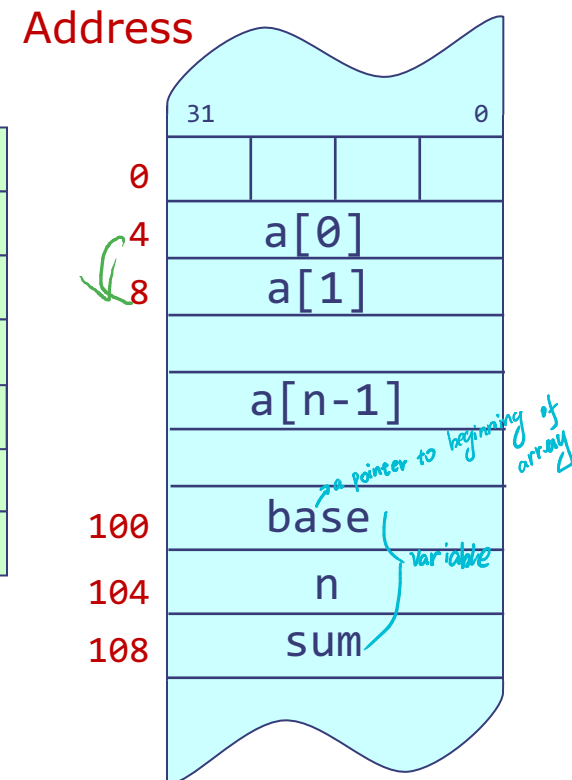

High Level vs Assembly Language

High Level Language

1. Complex arithmetic and logical operations
2. Complex data types and data structures
3. Complex control structures - Conditional statements, loops and procedures
4. Not suitable for direct implementation in hardware

Assembly Language

1. Primitive arithmetic and logical operations
2. Primitive data structures – bits and integers
3. Control transfer instructions
4. Designed to be directly implementable in hardware
tedious programming!


Instruction Set Architecture (ISA)

ISA

- ISA: The contract between software and hardware
 - Functional definition of **operations** and **storage locations**
 - **Precise description** of how software can invoke and access them
- RISC-V ISA:
 - A new, open, free ISA from Berkeley
 - Several variants
 - RV32, RV64, RV128: Different data widths
 - 'I': Base Integer instructions
 - 'M': Multiply and Divide
 - 'F' and 'D': Single- and Double-precision floating point
 - And many other modular extensions
- We will design an **RV32I processor**, which is the base integer 32-bit variant

RISC-V Processor Storage

0 1 bit
8 bits - byte
4 bytes - word

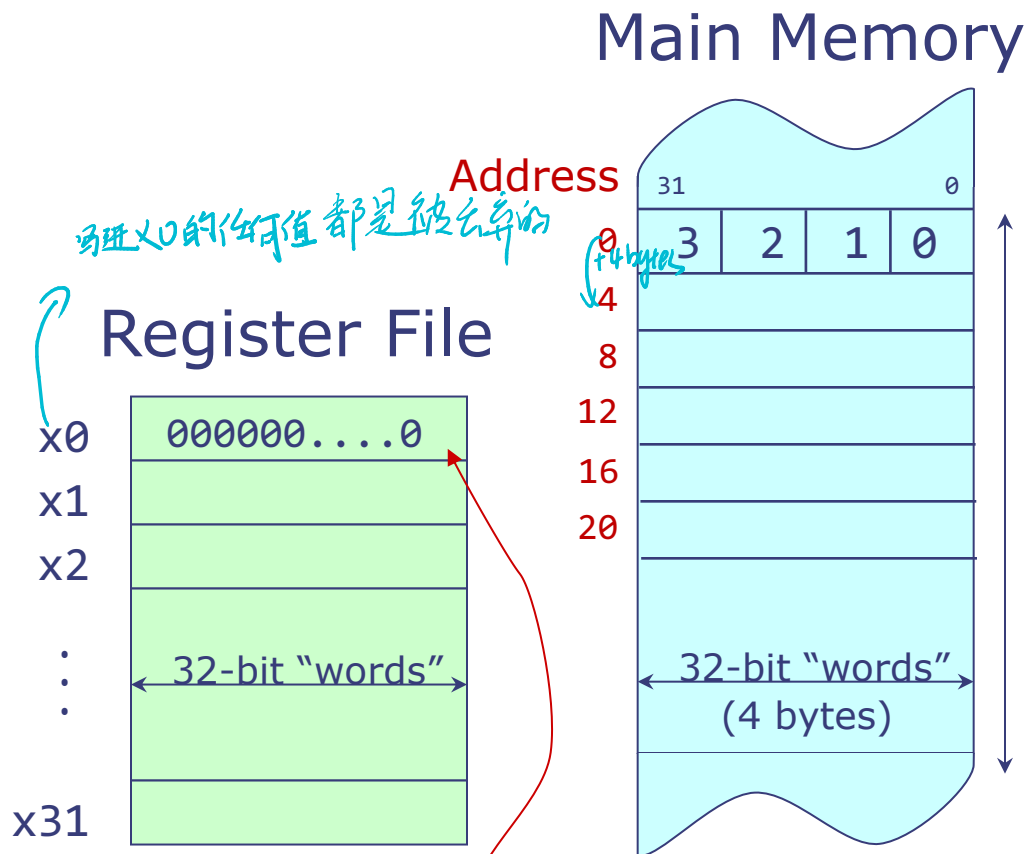

$x0$ hardwired to 0

值总是0

Registers:

- 32 General Purpose Registers
- Each register is 32 bits wide
- $x0 = 0$

Memory:

- Each memory location is 32 bits wide (1 word)
 - Instructions and data
- Memory is byte (8 bits) addressable
- Address of adjacent words are 4 apart
- Address is 32 bits
- Can address 2^{32} bytes or 2^{30} words.

RISC-V ISA: Instructions

- Three types of operations:
 - **Computational:** Perform arithmetic and logical operations on registers - 寄存器之间的运算
 - **Loads and stores:** Move data between registers and main memory - 寄存器与主内存之间的数据移动
内存中无法直接进行计算
 - **Control Flow:** Change the execution order of instructions to support conditional statements and loops.
- 改变指令的执行顺序

官网下载 RISC-V reference.
需要理解

Computational Instructions

- Arithmetic, comparison, logical, and shift operations.

两个 operand 都来自 register

- Register-Register Instructions:

- 2 source operand registers
- 1 destination register

Arithmetic	Comparisons	Logical	Shifts
add, sub	slt, sltu	and, or, xor	sll, srl, sra

src1 < src2
set less than
set less than unsign
exclusive-or
log ic
shift right arithmetic
right
(a < b) V (a > b)

- Format: oper dest, src1, src2

- add x3, x1, x2
- slt x3, x1, x2
- and x3, x1, x2
- sll x3, x1, x2

$x3 \leftarrow x1 + x2$

If $x1 < x2$ then $x3 = 1$ else $x3 = 0$

$x3 \leftarrow x1 \& x2$

$x3 \leftarrow x1 \ll x2$

将 x_1 左移 x_2 位, 再存到 x_3
 ↓ 按位逻辑

All Values are Binary

补0
srl 补0
sra 补1
正: 和srl一样
负: 补1

- Suppose: $x1 = 00101$; $x2 = 00011$ \Rightarrow

- add $x3$, $x1$, $x2$

Base 10

$$\begin{array}{r} 5 \\ + 3 \\ \hline 8 \end{array}$$

Base 2

$$\begin{array}{r} 111 \\ 00101 \\ + 00011 \\ \hline 01000 \end{array}$$

shift 左 补0 +2
shift 右 补0 -2

- ~~add~~ sll $x3$, $x1$, $x2$
Shift $x1$ left
by $x2$ bits

00101
01010
10100
01000

由于 $x2=3$, 所以
移3位
Notice fixed
width

Register-Immediate Instructions

- One operand comes from a register and the other is a small constant that is encoded into the instruction.

- Format:** oper dest, src1, const

- addi x3, x1, 3

- $x3 \leftarrow x1 + 3$

- andi x3, x1, 3

- $x3 \leftarrow x1 \& 3$

- slli x3, x1, 3

- $x3 \leftarrow x1 \ll 3$

Format	Arithmetic	Comparisons	Logical	Shifts
Register-Register	add, sub	slt, sltu	and, or, xor	sll, srl, sra
Register-Immediate	addi <i>addi 是 subtract? 因为直接可以加一个负数</i>	slti, sltiu	andi, ori, xori	slli, srli, srai

- No subi, instead use negative constant.


- addi x3, x1, -3

- $x3 \leftarrow x1 - 3$

Instruction Encoding


32 register ARS

Register-Register Instruction Format

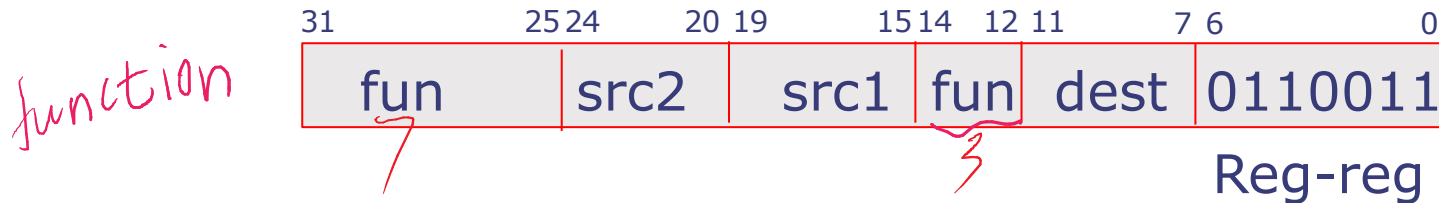

- src1, src2, and dest are 5 bits wide why? 由于存在32个 register 所以只能化为二进制到最多5位
- fun bits encode the actual function (add, and, etc.)


Register-Immediate Instruction Format

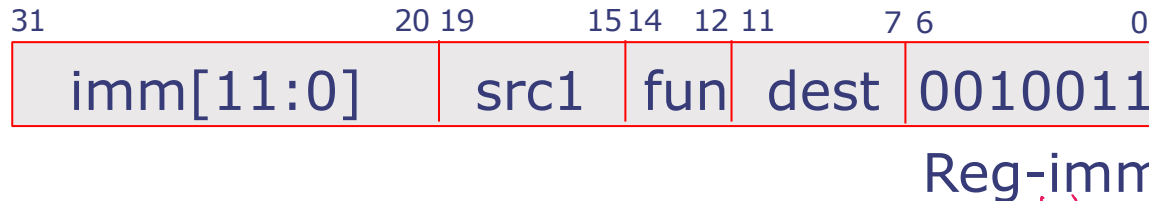

- No src2, imm: 12 bit constant

为什么是12bit, 因为只能12位了

Compound Computation

- Execute $a = ((b+3) \gg c) - 1;$
 - Break up complex expression into **basic computations**.
 - Our instructions can only specify two source operands and one destination operand (also known as three address instruction) 
 - Assume a, b, c are in registers x1, x2, and x3 respectively. Use x4 for t0, and x5 for t1.

```
t0 = b + 3;  
t1 = t0 >> c;  
a = t1 - 1;
```

```
addi x4, x2, 3  
srl x5, x4, x3  
addi x1, x5, -1
```

LUI

- Load upper immediate
 - Doesn't load anything from memory
 - Puts immediate value in the upper portion of a register
 - Appends 12 zeroes to the low end of the register
- 12 zeros
 - Supports getting constants that are larger than 12 bits into register
- 12 zeros
- lui x2, 0x3
 - x2 = 0x3000 16 bits
↓ 12 zeros

Control Flow Instructions

- Execute `if (a < b):`
`c = a + 1`
`else:`
`c = b + 2`
- Need Conditional branch instructions:
 - Format: `comp src1, src2, label` → 想要跳转的地方
 - First performs comparison to determine if branch is taken or not: `src1 comp src2`
 - If comparison returns True, then branch is taken, else continue executing program in order.

Instruction	beq	bne	blt	bge	bltu	bgeu
<i>comp</i>	==	!=	<	≥	<	≥

← 此处分支跳转
`bge x1, x2, else`
`addi x3, x1, 1`
`beq x0, x0, end` → 结束
`else:`
`addi x3, x2, 2`
`end:`

Assume
`x1=a; x2=b; x3=c;`

Unconditional Control Instructions: Jumps

- jal: Unconditional jump and link
 - Example: `jal x3, label`
 - Jump target specified as label 想要跳转到哪里
 - label is encoded as an offset from current instruction
-XXXXXXXXXXXXXXXXXXXX
 - Link (To be discussed next lecture): is stored in x3



- jalr: Unconditional jump via register and link
 - Example: `jalr x3, 4(x1)`
 - Jump target specified as register value plus constant offset
 - Example: Jump target = x1 + 4
 - Can jump to any 32 bit address – supports long jumps

Performing Computations on Values in Memory


$a = b + c$

b: $x1 \leftarrow \text{load}(\text{Mem}[0x4])$

c: $x2 \leftarrow \text{load}(\text{Mem}[0x8])$

$x3 \leftarrow x1 + x2$

a: $\text{store}(\text{Mem}[0x10]) \leftarrow x3$

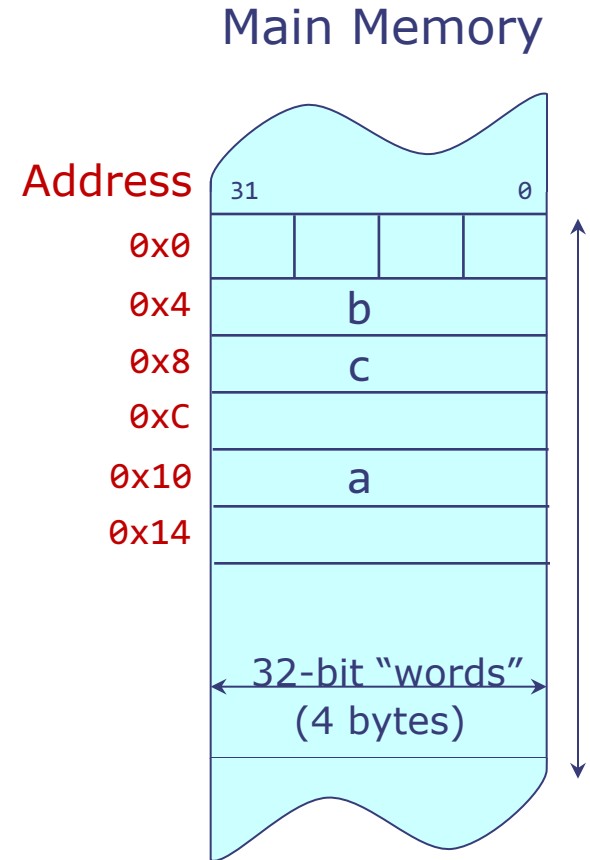

RISC-V Load and Store Instructions

- Address is specified as a **<base address, offset>** pair;
 - base address is always stored in a register
 - the offset is encoded as a 12 bit constant in the instruction
 - Format: **lw dest, offset(base)** **sw src, offset(base)**
- Assembly:
- Behavior:

```
lw x1, 0x4(x0)
lw x2, 0x8(x0)
add x3, x1, x2
sw x3, 0x10(x0)
```

```
x1 ← load(Mem[x0 + 0x4])
x2 ← load(Mem[x0 + 0x8])
x3 ← x1 + x2
store(Mem[x0 + 0x10]) ← x3
```

Program to sum array elements

$\text{sum} = a[0] + a[1] + a[2] + \dots + a[n-1]$


(Assume 100 (address of base) already loaded into x10)

a[0]地址


```
lw x1, 0x0(x10)
lw x2, 0x4(x10) n
add x3, x0, x0

loop:
    lw x4, 0x0(x1)
    add x3, x3, x4
    addi x1, x1, 4
    addi x2, x2, -1
    bnez x2, loop

    sw x3, 0x8(x10)
```

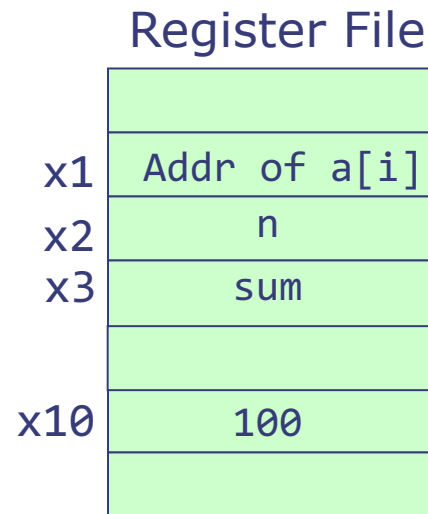

Main Memory

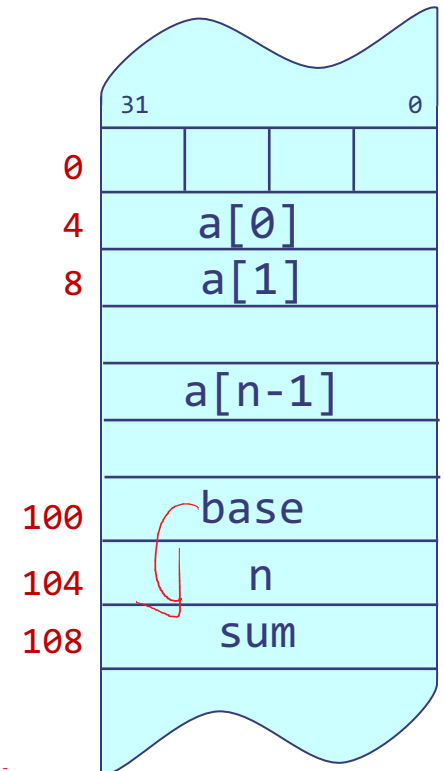

Pseudoinstructions

- Aliases to other actual instructions to simplify assembly programming. -XXXXXXXXXXXXXXXXXXXX

Pseudoinstruction:	Equivalent Assembly Instruction:
<code>mv x2, x1</code>	<code>addi x2, x1, 0</code>
<code>ble x1, x2, label</code>	<code>bge x2, x1, label</code>
<code>li x2, 3</code>	<code>addi x2, x0, 3</code>
<code>li x3, 0x4321</code>	<code>lui x3, 0x4</code> <code>addi x3, x3, 0x321</code>

Thank you!

Next lecture:
Implementing Procedures in Assembly