


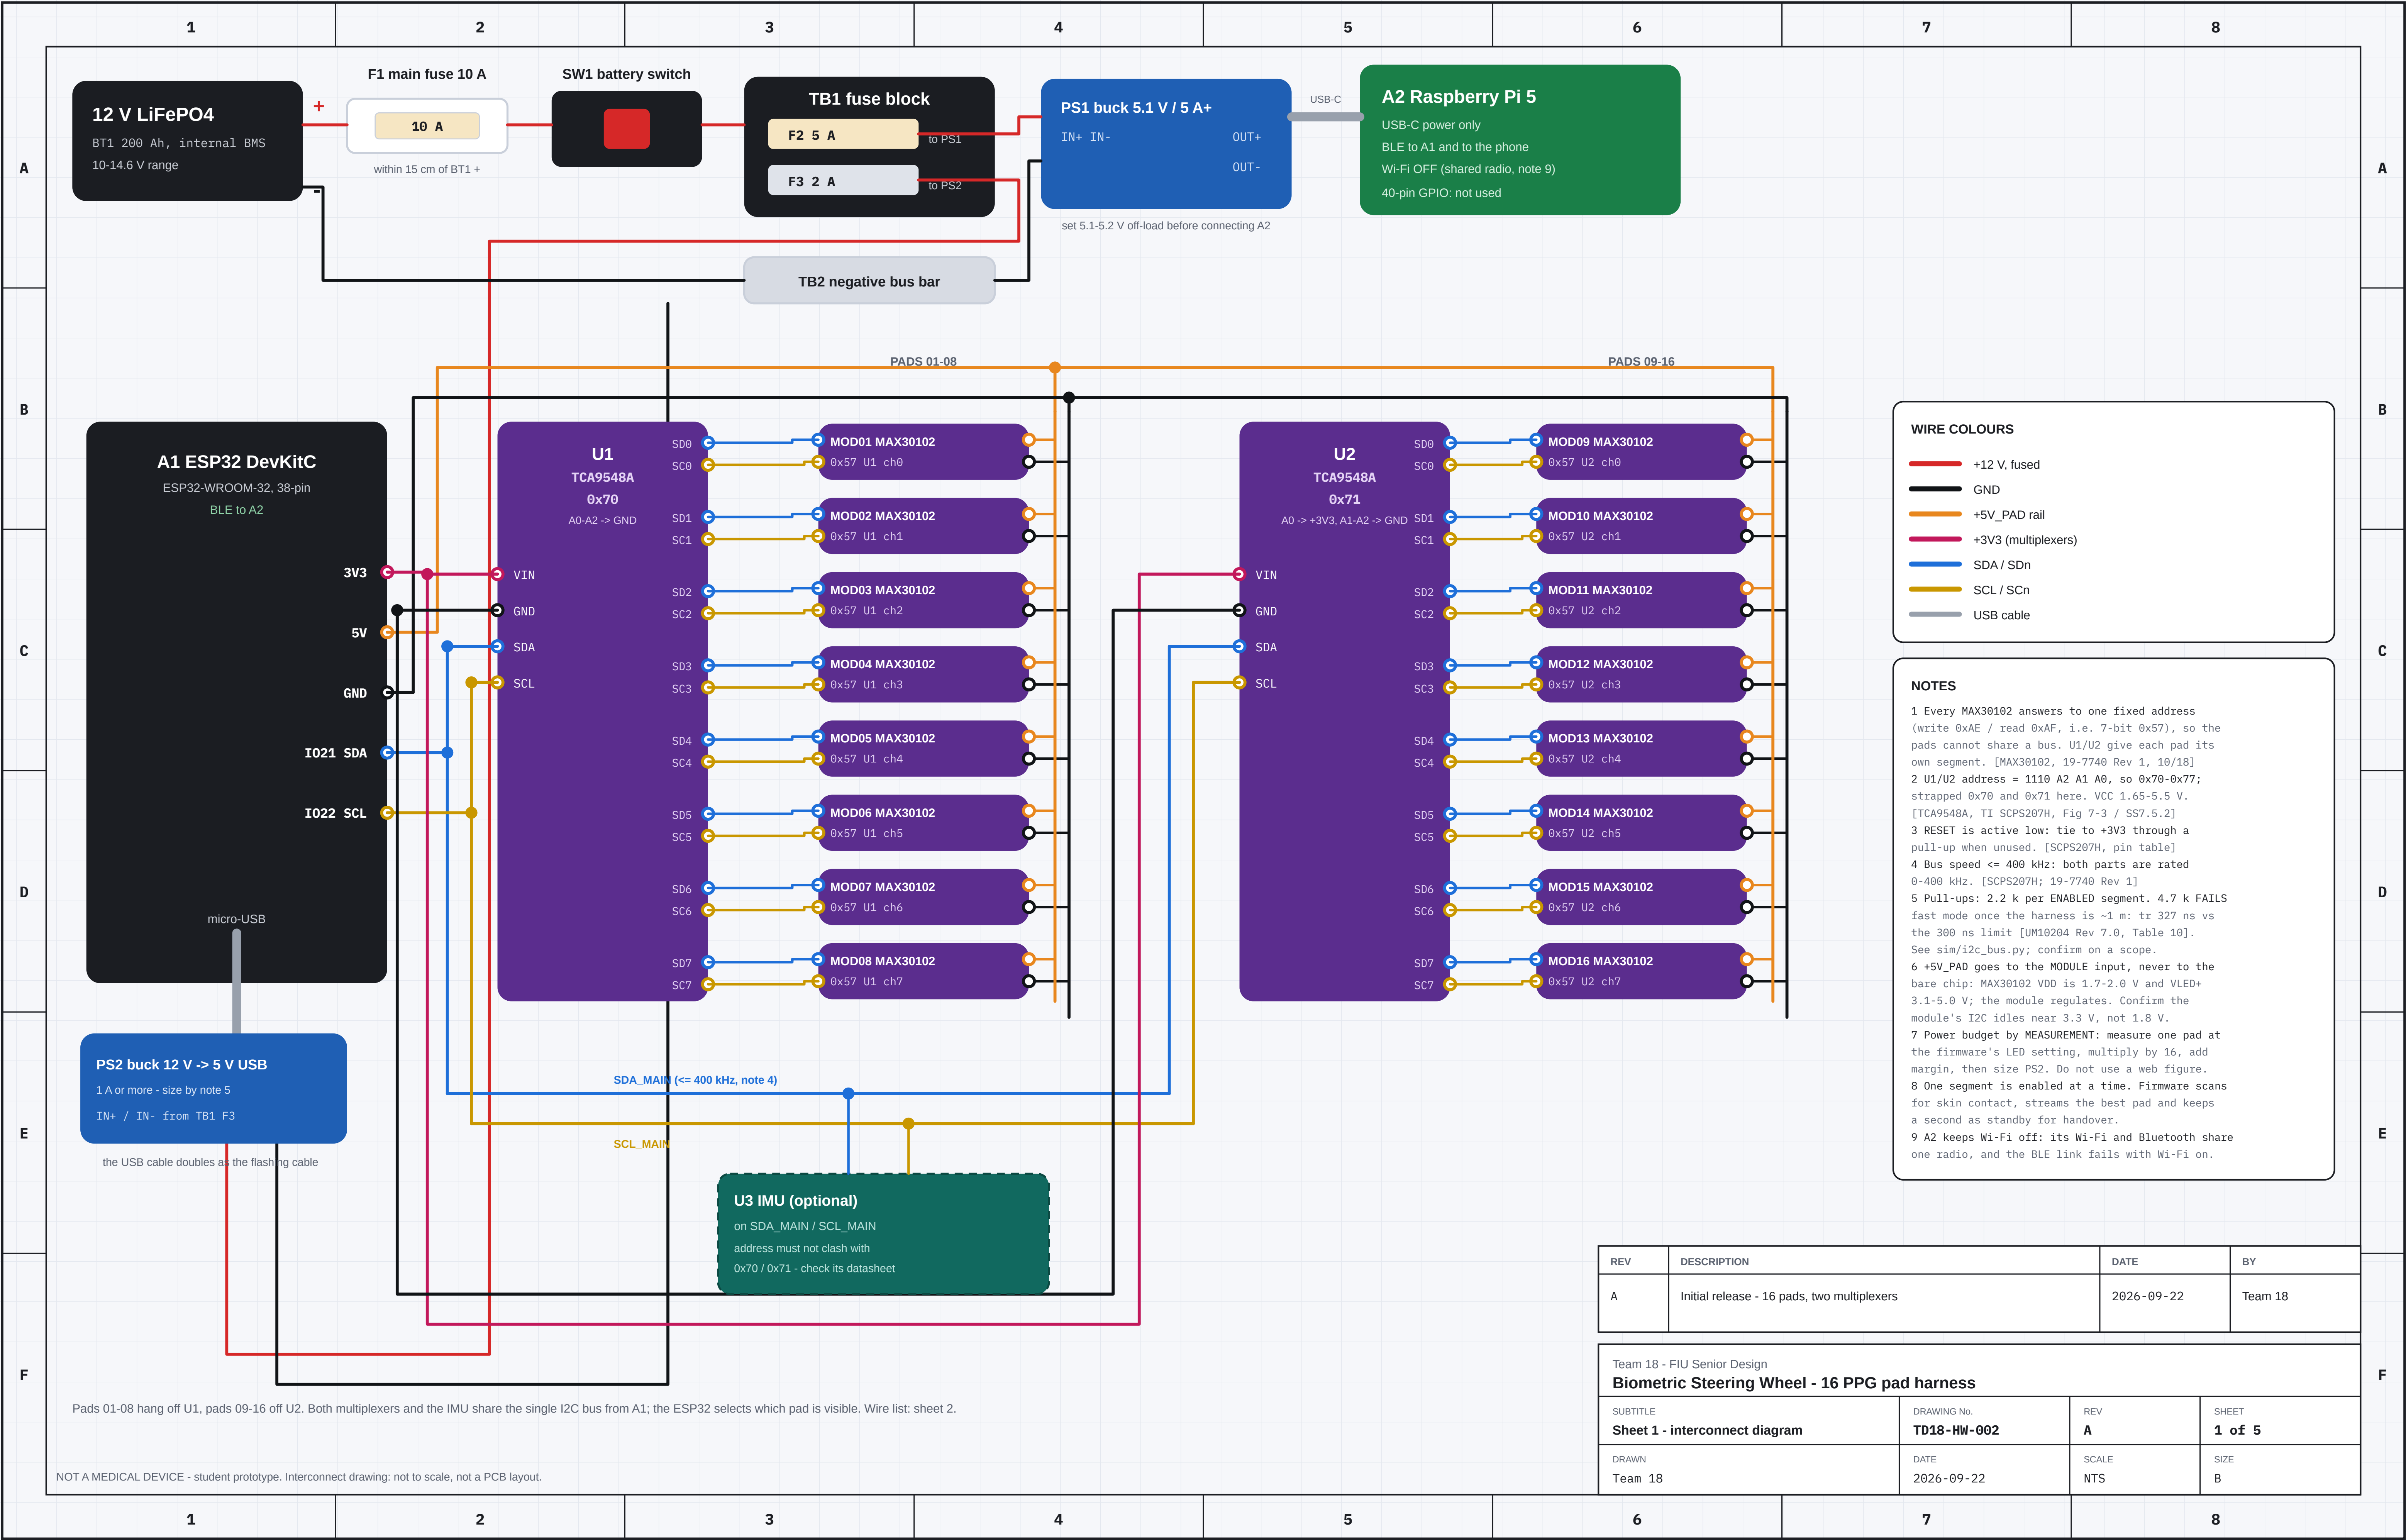

1		2		3		4		5		6		7		8				
A	PARTS LIST															A		
	REF	QTY	DESCRIPTION	KEY RATINGS / NOTES														
	BT1	1	12 V LiFePO4 battery, 200 Ah, internal BMS	10-14.6 V working range														
	F1	1	Fuse + holder, 10 A	within 15 cm of BT1 +														
	SW1	1	Battery master switch	disconnects the whole system														
	TB1	1	Fused distribution block, 2 ways	F2 5 A -> PS1, F3 2 A -> PS2														
	TB2	1	Negative bus bar	single return point														
	PS1	1	Buck converter 12 V -> 5.1 V, 5 A or more	set off-load before connecting A2														
	PS2	1	Buck converter 12 V -> 5 V USB	1 A or more; size by note 5, sheet 1														
	A1	1	ESP32-WROOM-32 DevKitC, 38-pin	I2C on IO21/IO22; BLE to A2														
B	A2	1	Raspberry Pi 5	USB-C power only; Wi-Fi off												B		
	U1, U2	2	TCA9548A 8-channel I2C switch module	0x70 / 0x71; VCC 1.65-5.5 V; 400 kHz														
	MOD01-16	16	MAX30102 pulse-oximetry module	0x57; module VIN, onboard regulator														
	U3	1	IMU module (optional)	on the main bus; address must not clash														
	R1-R4	a/r	Pull-up resistors 2.2 k	one pair per enabled segment (note 5)														
	R5, R6	2	Pull-up resistors 10 k	RESET of U1/U2 to +3V3 (note 3)														
	-	a/r	Harness wire, sleeving, strain relief	size from the measured current (note 7)														
	C	WIRE LIST															C	
		FROM	TO	NET	WIRE													
BT1 +		F1 in	+12V_RAW	red														
F1 out		SW1 1	+12V_FUSED	red														
SW1 2		TB1 in	+12V_SW	red														
TB1 F2 out		PS1 IN+	+12V_PI	red														
TB1 F3 out		PS2 IN+	+12V_ESP	red														
BT1 -		TB2	GND	black														
TB2		PS1 IN- , PS2 IN-	GND	black														
PS1 OUT+ / OUT-		A2 USB-C	+5V_PI	USB cable														
D	PS2 OUT	A1 micro-USB	+5V_ESP	USB cable												D		
	A1 3V3	U1 VIN, U2 VIN	+3V3	pink														
	A1 5V	MOD01-16 VIN	+5V_PAD	orange														
	A1 GND	U1/U2 GND, MOD01-16 GND, U3 GND	GND	black														
	A1 IO21	U1 SDA, U2 SDA, U3 SDA	SDA_MAIN	blue														
	A1 IO22	U1 SCL, U2 SCL, U3 SCL	SCL_MAIN	yellow														
	U1 SD0..SD7	MOD01..MOD08 SDA	SDA_A0..A7	blue														
	U1 SC0..SC7	MOD01..MOD08 SCL	SCL_A0..A7	yellow														
	U2 SD0..SD7	MOD09..MOD16 SDA	SDA_B0..B7	blue														
	U2 SC0..SC7	MOD09..MOD16 SCL	SCL_B0..B7	yellow														
E	U1 A0, A1, A2	GND	ADDR_U1 = 0x70	-												E		
	U2 A0	+3V3 (A1, A2 to GND)	ADDR_U2 = 0x71	-														
	U1 RESET, U2 RESET	+3V3 through 10 k	RST_MUX	-														
F																F		
NOT A MEDICAL DEVICE - student prototype. Interconnect drawing: not to scale, not a PCB layout.																		
1		2		3		4		5		6		7		8				

DEVICE DATA - AS VERIFIED AGAINST THE PRIMARY DATASHEETS

TCA9548A TI SCPS207H, MAY 2012 - REVISED SEPTEMBER 2024
8 bidirectional channels; address byte 1110 A2 A1 A0 -> 0x70-0x77 (Figure 7-3, section 7.5.2)
VCC 1.65-5.5 V (recommended operating conditions); fSCL 0-400 kHz; 5 V tolerant I/O
RESET active low; connect to VCC through a pull-up when unused (pin functions table)

MAX30102 Maxim 19-7740; Rev 1; 10/18
I2C write address 0xAE, read address 0xAF (7-bit 0x57); fSCL 0-400 kHz (electrical characteristics)
VDD 1.7-2.0 V (1.8 typ); VLED+ 3.1-5.0 V (3.3 typ) - the module's regulator makes 5 V VIN safe
FIFO depth 32 samples - read in bursts instead of switching channel per sample

IMU U3 address unverified here: confirm against the datasheet of the module actually fitted, and check it does not clash with 0x70 / 0x71

BEFORE POWER-UP

1 Set PS1 to 5.1-5.2 V with no load, then connect A2.
2 Check +5V_PAD and +3V3 at the far end of the harness, not only at the source.
3 With power on and no I2C traffic, SDA and SCL must idle high near 3.3 V.
4 Scan the bus: only 0x70 and 0x71 answer until a channel is enabled.
5 Enable one channel at a time and confirm exactly one 0x57 answers.
6 Check the SDA/SCL rise time on a scope with the full harness fitted:
it must reach 0.3->0.7 VDD within 300 ns at 400 kHz.
7 Shut A2 down cleanly before opening SW1.

HOW THE FIRMWARE USES THE PADS

Scan step through the segments, read each pad's IR level and test for skin contact
Stream keep the pad with the best signal selected; one pad streams at a time
Standby keep a second candidate sampling so a handover does not restart the estimator
Hand over when the streaming pad loses contact, switch to the standby and pick the next
Rate 100 Hz per streaming pad, one 1 s packet per second over BLE (unchanged)

REV	DESCRIPTION	DATE	BY
A	Initial release - 16 pads, two multiplexers	2026-09-22	Team 18

Team 18 - FIU Senior Design

Biometric Steering Wheel - 16 PPG pad harness

SUBTITLE	DRAWING No.	REV	SHEET
Sheet 2 - parts list and wire list	TD18-HW-002	A	2 of 5
DRAWN	DATE	SCALE	SIZE
Team 18	2026-09-22	NTS	B



	1	2	3	4	5	6	7	8																																																																								
A	WHERE AND WHEN THESE RESULTS CAME FROM <table><tr><th>ITEM</th><th>VALUE</th></tr><tr><td>Run finished</td><td>2026-09-22T17:53:38-04:00</td></tr><tr><td>Machine</td><td>hackerpc - Linux 7.2.5-3-omarchy</td></tr><tr><td>Schematic tool</td><td>10.0.6</td></tr><tr><td>Simulator</td><td>ngspice-47 : Circuit level simulation program</td></tr><tr><td>Renderexer</td><td>rsvg-convert version 2.62.3</td></tr><tr><td>Python</td><td>3.14.7</td></tr><tr><td>Source</td><td>git luis/full-system @ d70a3fd - docs/hardware/</td></tr><tr><td>Drawing</td><td>TD18-HW-002 rev A - sheets 1-2 drawn, sheet 3 from KiCad</td></tr></table>				ITEM	VALUE	Run finished	2026-09-22T17:53:38-04:00	Machine	hackerpc - Linux 7.2.5-3-omarchy	Schematic tool	10.0.6	Simulator	ngspice-47 : Circuit level simulation program	Renderexer	rsvg-convert version 2.62.3	Python	3.14.7	Source	git luis/full-system @ d70a3fd - docs/hardware/	Drawing	TD18-HW-002 rev A - sheets 1-2 drawn, sheet 3 from KiCad	DEVICE DATA: DOCUMENT, WHERE IT CAME FROM, WHAT WAS TAKEN <table><tr><th>PART</th><th>DOCUMENT</th><th>VALUE USED AND WHERE IT APPEARS</th></tr><tr><td rowspan="4">TCA9548A</td><td>TI SCPS207H</td><td>8 channels; 1110 A2 A1 A0 -> 0x70-0x77</td></tr><tr><td>MAY 2012, rev SEP 2024</td><td>Figure 7-3 / section 7.5.2 -> U1 0x70, U2 0x71</td></tr><tr><td>ti.com/lit/ds/symlink/tca9548a.pdf</td><td>VCC 1.65-5.5 V; fSCL 0-400 kHz; 5 V tolerant</td></tr><tr><td>fetched 2026-09-22</td><td>RESET active low -> R5/R6 10 k to +3V3</td></tr><tr><td rowspan="2">MAX30102</td><td>Maxim 19-7740 Rev 1</td><td>write 0xAE / read 0xAF = 7-bit 0x57 -> note 1</td></tr><tr><td>10/18</td><td>VDD 1.7-2.0 V, VLED+ 3.1-5.0 V -> note 6</td></tr><tr><td rowspan="3">I2C bus</td><td>mirror: download.mikroe.com</td><td>fSCL 0-400 kHz -> note 4</td></tr><tr><td>(analog.com blocked the automated download)</td><td>FIFO depth 32 samples -> read in bursts</td></tr><tr><td>NXP UM10204 Rev 7.0</td><td>fast mode tr <= 300 ns, Cb <= 400 pF</td></tr><tr><td rowspan="2">IMU</td><td>1 October 2021, Table 10</td><td>-> the pull-up limit checked in SPICE</td></tr><tr><td>nxp.com/docs/en/user-guide/</td><td></td></tr><tr><td></td><td>not verified</td><td>address unknown until the module is chosen; it must not clash with 0x70 / 0x71</td></tr></table>				PART	DOCUMENT	VALUE USED AND WHERE IT APPEARS	TCA9548A	TI SCPS207H	8 channels; 1110 A2 A1 A0 -> 0x70-0x77	MAY 2012, rev SEP 2024	Figure 7-3 / section 7.5.2 -> U1 0x70, U2 0x71	ti.com/lit/ds/symlink/tca9548a.pdf	VCC 1.65-5.5 V; fSCL 0-400 kHz; 5 V tolerant	fetched 2026-09-22	RESET active low -> R5/R6 10 k to +3V3	MAX30102	Maxim 19-7740 Rev 1	write 0xAE / read 0xAF = 7-bit 0x57 -> note 1	10/18	VDD 1.7-2.0 V, VLED+ 3.1-5.0 V -> note 6	I2C bus	mirror: download.mikroe.com	fSCL 0-400 kHz -> note 4	(analog.com blocked the automated download)	FIFO depth 32 samples -> read in bursts	NXP UM10204 Rev 7.0	fast mode tr <= 300 ns, Cb <= 400 pF	IMU	1 October 2021, Table 10	-> the pull-up limit checked in SPICE	nxp.com/docs/en/user-guide/			not verified	address unknown until the module is chosen; it must not clash with 0x70 / 0x71	A																					
	ITEM	VALUE																																																																														
Run finished	2026-09-22T17:53:38-04:00																																																																															
Machine	hackerpc - Linux 7.2.5-3-omarchy																																																																															
Schematic tool	10.0.6																																																																															
Simulator	ngspice-47 : Circuit level simulation program																																																																															
Renderexer	rsvg-convert version 2.62.3																																																																															
Python	3.14.7																																																																															
Source	git luis/full-system @ d70a3fd - docs/hardware/																																																																															
Drawing	TD18-HW-002 rev A - sheets 1-2 drawn, sheet 3 from KiCad																																																																															
PART	DOCUMENT	VALUE USED AND WHERE IT APPEARS																																																																														
TCA9548A	TI SCPS207H	8 channels; 1110 A2 A1 A0 -> 0x70-0x77																																																																														
	MAY 2012, rev SEP 2024	Figure 7-3 / section 7.5.2 -> U1 0x70, U2 0x71																																																																														
	ti.com/lit/ds/symlink/tca9548a.pdf	VCC 1.65-5.5 V; fSCL 0-400 kHz; 5 V tolerant																																																																														
	fetched 2026-09-22	RESET active low -> R5/R6 10 k to +3V3																																																																														
MAX30102	Maxim 19-7740 Rev 1	write 0xAE / read 0xAF = 7-bit 0x57 -> note 1																																																																														
	10/18	VDD 1.7-2.0 V, VLED+ 3.1-5.0 V -> note 6																																																																														
I2C bus	mirror: download.mikroe.com	fSCL 0-400 kHz -> note 4																																																																														
	(analog.com blocked the automated download)	FIFO depth 32 samples -> read in bursts																																																																														
	NXP UM10204 Rev 7.0	fast mode tr <= 300 ns, Cb <= 400 pF																																																																														
IMU	1 October 2021, Table 10	-> the pull-up limit checked in SPICE																																																																														
	nxp.com/docs/en/user-guide/																																																																															
	not verified	address unknown until the module is chosen; it must not clash with 0x70 / 0x71																																																																														
B	WHAT WAS RUN, AND WHAT IT RETURNED <table><tr><th>TIME</th><th>CHECK</th><th>RESULT</th><th>VALUES</th></tr><tr><td>17:53:39</td><td>Spec self-check</td><td>PASS</td><td>parts=38 nets=45 pins=177 connected=161 no_connect=16</td></tr><tr><td>17:53:39</td><td>Generate schematic from the spec</td><td>PASS</td><td></td></tr><tr><td>17:53:39</td><td>KiCad electrical rule check</td><td>PASS</td><td>messages=0 errors=0 warnings=0</td></tr><tr><td>17:53:39</td><td>Export netlist from the schematic</td><td>PASS</td><td></td></tr><tr><td>17:53:40</td><td>Netlist vs spec cross-check</td><td>PASS</td><td>nets=45 result=ALL MATCH</td></tr><tr><td>17:53:40</td><td>Export the schematic sheet (PDF)</td><td>PASS</td><td></td></tr><tr><td>17:53:41</td><td>Export the bill of materials</td><td>PASS</td><td>lines=17 pads=16</td></tr><tr><td>17:53:42</td><td>SPICE transient: I2C rise time, Rp = 2.2 k</td><td>PASS</td><td>tr_ns=152.8 limit_ns=300 rp_ohm=2200 cb_pF=82.0</td></tr><tr><td>17:53:42</td><td>SPICE transient: I2C rise time, Rp = 4.7 k</td><td>FAIL</td><td>tr_ns=326.5 limit_ns=300 rp_ohm=4700 cb_pF=82.0</td></tr><tr><td>17:53:42</td><td>SPICE operating point: +5V_PAD ring</td><td>PASS</td><td>pads=16 first_V=4.997 worst_V=4.971 total_mA=400 wire=</td></tr></table> The 4.7 k run is expected to fail: it is the rejected option, kept as evidence.				TIME	CHECK	RESULT	VALUES	17:53:39	Spec self-check	PASS	parts=38 nets=45 pins=177 connected=161 no_connect=16	17:53:39	Generate schematic from the spec	PASS		17:53:39	KiCad electrical rule check	PASS	messages=0 errors=0 warnings=0	17:53:39	Export netlist from the schematic	PASS		17:53:40	Netlist vs spec cross-check	PASS	nets=45 result=ALL MATCH	17:53:40	Export the schematic sheet (PDF)	PASS		17:53:41	Export the bill of materials	PASS	lines=17 pads=16	17:53:42	SPICE transient: I2C rise time, Rp = 2.2 k	PASS	tr_ns=152.8 limit_ns=300 rp_ohm=2200 cb_pF=82.0	17:53:42	SPICE transient: I2C rise time, Rp = 4.7 k	FAIL	tr_ns=326.5 limit_ns=300 rp_ohm=4700 cb_pF=82.0	17:53:42	SPICE operating point: +5V_PAD ring	PASS	pads=16 first_V=4.997 worst_V=4.971 total_mA=400 wire=	MEASURED AND SIMULATED NUMBERS, WITH THEIR CONDITIONS <table><tr><th>QUANTITY</th><th>CONDITIONS</th><th>RESULT</th></tr><tr><td>I2C rise time, 2.2 k</td><td>Cb 82 pF, 1 m, 1 pad</td><td>152.8 ns - PASS (limit 300 ns)</td></tr><tr><td>I2C rise time, 4.7 k</td><td>same segment</td><td>326.5 ns - FAIL, over the limit</td></tr><tr><td>Closed-form RC check</td><td>tr = 0.8473 x R x C</td><td>153 ns at 2.2 k - agrees within 0.2 %</td></tr><tr><td>+5V_PAD, first pad</td><td>400 mA total, AWG 22, 1.2 m</td><td>4.997 V</td></tr><tr><td>+5V_PAD, worst pad</td><td>16 pads, all powered</td><td>4.971 V - PASS</td></tr><tr><td>ERC</td><td>KiCad, errors + warnings</td><td>0 and 0</td></tr><tr><td>Netlist vs spec</td><td>45 nets, 161 pin connections</td><td>all match</td></tr><tr><td>BOM vs the parts list</td><td>grouped by value</td><td>16 pads, 2 switches, 4 x 2k2, 2 x 10k</td></tr></table>				QUANTITY	CONDITIONS	RESULT	I2C rise time, 2.2 k	Cb 82 pF, 1 m, 1 pad	152.8 ns - PASS (limit 300 ns)	I2C rise time, 4.7 k	same segment	326.5 ns - FAIL, over the limit	Closed-form RC check	tr = 0.8473 x R x C	153 ns at 2.2 k - agrees within 0.2 %	+5V_PAD, first pad	400 mA total, AWG 22, 1.2 m	4.997 V	+5V_PAD, worst pad	16 pads, all powered	4.971 V - PASS	ERC	KiCad, errors + warnings	0 and 0	Netlist vs spec	45 nets, 161 pin connections	all match	BOM vs the parts list	grouped by value	16 pads, 2 switches, 4 x 2k2, 2 x 10k	B
TIME	CHECK	RESULT	VALUES																																																																													
17:53:39	Spec self-check	PASS	parts=38 nets=45 pins=177 connected=161 no_connect=16																																																																													
17:53:39	Generate schematic from the spec	PASS																																																																														
17:53:39	KiCad electrical rule check	PASS	messages=0 errors=0 warnings=0																																																																													
17:53:39	Export netlist from the schematic	PASS																																																																														
17:53:40	Netlist vs spec cross-check	PASS	nets=45 result=ALL MATCH																																																																													
17:53:40	Export the schematic sheet (PDF)	PASS																																																																														
17:53:41	Export the bill of materials	PASS	lines=17 pads=16																																																																													
17:53:42	SPICE transient: I2C rise time, Rp = 2.2 k	PASS	tr_ns=152.8 limit_ns=300 rp_ohm=2200 cb_pF=82.0																																																																													
17:53:42	SPICE transient: I2C rise time, Rp = 4.7 k	FAIL	tr_ns=326.5 limit_ns=300 rp_ohm=4700 cb_pF=82.0																																																																													
17:53:42	SPICE operating point: +5V_PAD ring	PASS	pads=16 first_V=4.997 worst_V=4.971 total_mA=400 wire=																																																																													
QUANTITY	CONDITIONS	RESULT																																																																														
I2C rise time, 2.2 k	Cb 82 pF, 1 m, 1 pad	152.8 ns - PASS (limit 300 ns)																																																																														
I2C rise time, 4.7 k	same segment	326.5 ns - FAIL, over the limit																																																																														
Closed-form RC check	tr = 0.8473 x R x C	153 ns at 2.2 k - agrees within 0.2 %																																																																														
+5V_PAD, first pad	400 mA total, AWG 22, 1.2 m	4.997 V																																																																														
+5V_PAD, worst pad	16 pads, all powered	4.971 V - PASS																																																																														
ERC	KiCad, errors + warnings	0 and 0																																																																														
Netlist vs spec	45 nets, 161 pin connections	all match																																																																														
BOM vs the parts list	grouped by value	16 pads, 2 switches, 4 x 2k2, 2 x 10k																																																																														
C	COMMANDS, EXACTLY AS EXECUTED <table><tr><th>CHECK</th><th>COMMAND</th></tr><tr><td>Spec self-check</td><td>/usr/bin/python3 harness_spec.py</td></tr><tr><td>Generate schematic from the spec</td><td>/usr/bin/python3 gen_schematic.py</td></tr><tr><td>KiCad electrical rule check</td><td>kicad-cli sch erc --severity-error --severity-warning --exit-code-violations -o erc_report.txt w</td></tr><tr><td>Export netlist from the schematic</td><td>kicad-cli sch export netlist --format kicadsexpr -o wheel_harness.net wheel_harness.kicad_sch</td></tr><tr><td>Netlist vs spec cross-check</td><td>/usr/bin/python3 check_netlist.py wheel_harness.net</td></tr><tr><td>Export the schematic sheet (PDF)</td><td>kicad-cli sch export pdf -o wheel_harness_schematic.pdf wheel_harness.kicad_sch</td></tr><tr><td>Export the bill of materials</td><td>kicad-cli sch export bom --fields Reference,Value,\$(QUANTITY) --group-by Value -o wheel_harness_</td></tr><tr><td>SPICE transient: I2C rise time, Rp</td><td>ngspice -b /tmp/i2c_2200.cir</td></tr><tr><td>SPICE transient: I2C rise time, Rp</td><td>ngspice -b /tmp/i2c_4700.cir</td></tr><tr><td>SPICE operating point: +5V_PAD rin</td><td>ngspice -b /tmp/rail.cir</td></tr></table>				CHECK	COMMAND	Spec self-check	/usr/bin/python3 harness_spec.py	Generate schematic from the spec	/usr/bin/python3 gen_schematic.py	KiCad electrical rule check	kicad-cli sch erc --severity-error --severity-warning --exit-code-violations -o erc_report.txt w	Export netlist from the schematic	kicad-cli sch export netlist --format kicadsexpr -o wheel_harness.net wheel_harness.kicad_sch	Netlist vs spec cross-check	/usr/bin/python3 check_netlist.py wheel_harness.net	Export the schematic sheet (PDF)	kicad-cli sch export pdf -o wheel_harness_schematic.pdf wheel_harness.kicad_sch	Export the bill of materials	kicad-cli sch export bom --fields Reference,Value,\$(QUANTITY) --group-by Value -o wheel_harness_	SPICE transient: I2C rise time, Rp	ngspice -b /tmp/i2c_2200.cir	SPICE transient: I2C rise time, Rp	ngspice -b /tmp/i2c_4700.cir	SPICE operating point: +5V_PAD rin	ngspice -b /tmp/rail.cir	KICAD ERC REPORT, VERBATIM ERC report (2026-09-22T17:53:39, Encoding UTF8) Report includes: Errors, Warnings ***** Sheet / ** ERC messages: 0 Errors 0 Warnings 0 ** Ignored checks: - Global label only appears once in the schematic				C																																																	
CHECK	COMMAND																																																																															
Spec self-check	/usr/bin/python3 harness_spec.py																																																																															
Generate schematic from the spec	/usr/bin/python3 gen_schematic.py																																																																															
KiCad electrical rule check	kicad-cli sch erc --severity-error --severity-warning --exit-code-violations -o erc_report.txt w																																																																															
Export netlist from the schematic	kicad-cli sch export netlist --format kicadsexpr -o wheel_harness.net wheel_harness.kicad_sch																																																																															
Netlist vs spec cross-check	/usr/bin/python3 check_netlist.py wheel_harness.net																																																																															
Export the schematic sheet (PDF)	kicad-cli sch export pdf -o wheel_harness_schematic.pdf wheel_harness.kicad_sch																																																																															
Export the bill of materials	kicad-cli sch export bom --fields Reference,Value,\$(QUANTITY) --group-by Value -o wheel_harness_																																																																															
SPICE transient: I2C rise time, Rp	ngspice -b /tmp/i2c_2200.cir																																																																															
SPICE transient: I2C rise time, Rp	ngspice -b /tmp/i2c_4700.cir																																																																															
SPICE operating point: +5V_PAD rin	ngspice -b /tmp/rail.cir																																																																															
D	EVIDENCE FILES KEPT WITH THE DRAWING (SHA-256, first 16 hex) <table><tr><th>FILE</th><th>WHAT IT IS</th><th>SIZE</th><th>SHA-256</th></tr><tr><td>kicad/erc_report.txt</td><td>KiCad ERC output</td><td>345 B</td><td>ff836acdca4d4d80</td></tr><tr><td>kicad/wheel_harness.kicad_sch</td><td>the schematic itself</td><td>100,777 B</td><td>263ad3dea57d8576</td></tr><tr><td>kicad/harness.kicad_sym</td><td>symbol library</td><td>17,843 B</td><td>df6c0a73ce01a2a3</td></tr><tr><td>kicad/wheel_harness.net</td><td>netlist extracted by KiCad</td><td>59,512 B</td><td>95243b8282b8c9a7</td></tr><tr><td>kicad/wheel_harness_bom.csv</td><td>bill of materials</td><td>427 B</td><td>3b78f92d187797f0</td></tr><tr><td>verification.json</td><td>this page's source data</td><td>7,368 B</td><td>4f6e51b891dc4de5</td></tr></table>				FILE	WHAT IT IS	SIZE	SHA-256	kicad/erc_report.txt	KiCad ERC output	345 B	ff836acdca4d4d80	kicad/wheel_harness.kicad_sch	the schematic itself	100,777 B	263ad3dea57d8576	kicad/harness.kicad_sym	symbol library	17,843 B	df6c0a73ce01a2a3	kicad/wheel_harness.net	netlist extracted by KiCad	59,512 B	95243b8282b8c9a7	kicad/wheel_harness_bom.csv	bill of materials	427 B	3b78f92d187797f0	verification.json	this page's source data	7,368 B	4f6e51b891dc4de5	<table><tr><th>REV</th><th>DESCRIPTION</th><th>DATE</th><th>BY</th></tr><tr><td>A</td><td>Initial release - 16 pads, two multiplexers</td><td>2026-09-22</td><td>Team 18</td></tr></table> Team 18 - FIU Senior Design Biometric Steering Wheel - 16 PPG pad harness <table><tr><th>SUBTITLE</th><th>DRAWING No.</th><th>REV</th><th>SHEET</th></tr><tr><td>Sheet 4 - verification record</td><td>TD18-HW-002</td><td>A</td><td>4 of 5</td></tr><tr><th>DRAWN</th><th>DATE</th><th>SCALE</th><th>SIZE</th></tr><tr><td>Team 18</td><td>2026-09-22</td><td>NTS</td><td>B</td></tr></table>				REV	DESCRIPTION	DATE	BY	A	Initial release - 16 pads, two multiplexers	2026-09-22	Team 18	SUBTITLE	DRAWING No.	REV	SHEET	Sheet 4 - verification record	TD18-HW-002	A	4 of 5	DRAWN	DATE	SCALE	SIZE	Team 18	2026-09-22	NTS	B	D																			
FILE	WHAT IT IS	SIZE	SHA-256																																																																													
kicad/erc_report.txt	KiCad ERC output	345 B	ff836acdca4d4d80																																																																													
kicad/wheel_harness.kicad_sch	the schematic itself	100,777 B	263ad3dea57d8576																																																																													
kicad/harness.kicad_sym	symbol library	17,843 B	df6c0a73ce01a2a3																																																																													
kicad/wheel_harness.net	netlist extracted by KiCad	59,512 B	95243b8282b8c9a7																																																																													
kicad/wheel_harness_bom.csv	bill of materials	427 B	3b78f92d187797f0																																																																													
verification.json	this page's source data	7,368 B	4f6e51b891dc4de5																																																																													
REV	DESCRIPTION	DATE	BY																																																																													
A	Initial release - 16 pads, two multiplexers	2026-09-22	Team 18																																																																													
SUBTITLE	DRAWING No.	REV	SHEET																																																																													
Sheet 4 - verification record	TD18-HW-002	A	4 of 5																																																																													
DRAWN	DATE	SCALE	SIZE																																																																													
Team 18	2026-09-22	NTS	B																																																																													
E	HOW TO REPRODUCE THIS PAGE git clone <repo> && cd docs/hardware sudo pacman -S --needed kicad ngspice # or your distribution's equivalent python3 verify.py # runs all 10 checks, writes verification.json python3 report_sheets.py && ./assemble.sh # rebuilds this 5-sheet package								E																																																																							
F	NOT A MEDICAL DEVICE - student prototype. Interconnect drawing: not to scale, not a PCB layout.								F																																																																							
	1	2	3	4	5	6	7	8																																																																								

1		2		3		4		5		6		7		8		
A	WHAT THE CHECKS FOUND, AND WHAT WAS CHANGED															A
	ID	DATE / FIXED IN		FOUND BY		WHAT WAS WRONG		WHY IT MATTERS		THE FIX		HOW IT WAS VERIFIED				
	F-01	2026-09-22 2ff2bc2		sim/i2c_bus.py, then ngspice		4.7 k pull-ups, as first drawn, give a 327 ns rise time on a ~1 m branch		Over the 300 ns fast-mode limit (UM10204 Table 10). The bus would still often work, but outside spec, and worse as the harness grows.		Sheets and parts list changed to 2.2 k; note 5 rewritten with the number and the citation.		ngspice: 152.8 ns at 2.2 k, 326.5 ns at 4.7 k on the same segment.				
	F-02	2026-09-22 93857ab		harness_spec.py self-check		The ESP32's USB input and its 5 V output pin were modelled as one pin		The spec refused to build: one pin cannot be on both +5V_ESP and +5V_PAD. On a real board these are different nets with a fuse/diode between them.		A1 now has VBUS_USB (power input, from PS2) and a separate 5V pin (power output, to the pads).		Spec self-check passes: 177 pins, no pin on two nets.				
	F-03	2026-09-22 d70a3fd		KiCad ERC		power_pin_not_driven on PS1 IN+ and PS2 IN+		A fuse is a passive part, so ERC could not see that the battery drives the rails past F2/F3. Real designs answer this with a power flag.		PWR2 and PWR3 flags added on +12V_PI and +12V_ESP.		Those two errors gone from the ERC report.				
	F-04	2026-09-22 d70a3fd		KiCad ERC		pin_to_pin: three power outputs fighting on GND		The battery negative and both converter returns were all marked as drivers. Two drivers on one net is an error worth catching: on a real board it hides a wiring assumption.		Battery '-' and both OUT- pins are now passive; PWR1 alone drives GND.		No pin_to_pin violations remain.				
	F-05	2026-09-22 d70a3fd		KiCad ERC		pin_not_connected on pins that the drawing shows as wired		Stub wire ends were snapped to the 1.27 mm grid while the pins themselves sat at 135.84 mm: a 0.05 mm gap. Electrically open, visually identical. A picture can never catch this.		Symbol bodies are whole 2.54 mm steps and stubs now use the exact pin coordinate.		161 pin connections, all extracted by KiCad and matched against the spec.				
B																B
C																C
	F-06	2026-09-22 d70a3fd		KiCad ERC		lib_symbol_issues on all 38 symbols		The symbols were embedded in the sheet with no library to compare against, so KiCad could not confirm the placed symbol still matches its definition.		gen_schematic.py now also writes harness.kicad_sym and a sym-lib-table.		ERC: 0 errors, 0 warnings.				
D																D
	F-07	2026-09-22 684bf60		visual review of sheet 1		The F3 -> PS2 feed crossed over the PS1 block and its caption		Readability only, no electrical effect, but a wire that runs through a part is exactly what a reviewer marks up.		Rerouted: out of F3, down the gap before PS1, above the bus bar, then down a clear lane.		Re-rendered and checked; no wire now crosses a board on sheet 1.				
E																E
F																F
NOT A MEDICAL DEVICE - student prototype. Interconnect drawing: not to scale, not a PCB layout.																
1		2		3		4		5		6		7		8		

NOT A MEDICAL DEVICE - student prototype. Interconnect drawing: not to scale, not a PCB layout.