


(0, 4, 7, 1, 6, 3)

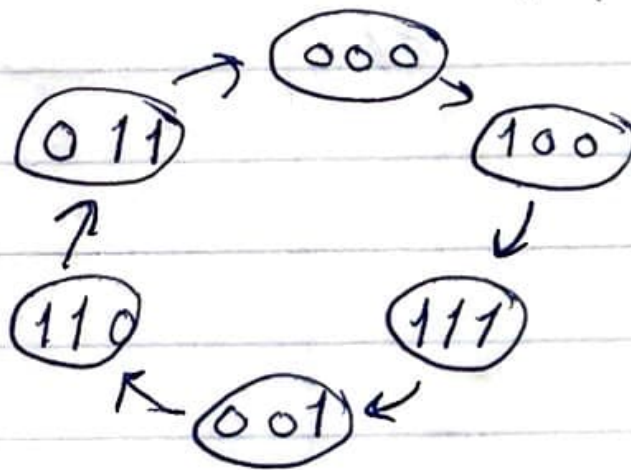

current

Next

0 0 0
1 0 0
1 1 1
0 0 1
1 1 0
0 1 1

1 0 0
1 1 1
0 0 1
1 1 0
0 1 1
0 0 0

QA	QB	QC	DA	DB	DC	
0	0	0	1	0	0	0
0	0	1	1	1	0	1
0	1	0	X	X	X	2
0	1	1	0	0	0	3
1	0	0	1	1	1	4
1	0	1	X	X	X	5
1	1	0	0	1	1	6
1	1	1	0	0	1	7

$$D_A = \Sigma(0, 1, 4) \quad D_B = \Sigma(1, 4, 6)$$

$$D_C = \Sigma(4, 6, 7) \quad d(2, 5)$$

$Q_A \backslash Q_B Q_C$	00	01	11	10
0	1	1		X
1	1	X		

$$D_A = \overline{Q_B}$$

$Q_A \backslash Q_B Q_C$	00	01	11	10
0		1	3	2 X
1	4	5 X	7	6

$$D_B = (Q_A \cdot \overline{Q_C}) + (\overline{Q_B} \cdot Q_C)$$

$Q_A \backslash Q_B Q_C$	00	01	11	10
0				X
1	1	X	1	1

$$D_C = Q_A$$

So $D_A = \overline{Q_B}$

$$D_B = (Q_A \cdot \overline{Q_C}) + (\overline{Q_B} \cdot Q_C)$$

$$D_C = Q_A$$