

AXI-Lite FIR DSP Peripheral

Modular VHDL IP core implementing a register-controlled
FIR DSP interface with scalable architecture.

Verification results

Author: Gabriela Cabrera
Github: @MGabrielaCabrera
Date: March 2026
Version: 1.1

INDEX

1. Verification description.....	3
2. AXI-Lite Slave Interface Verification.....	3
Module Description.....	3
Testbench Architecture.....	4
Test Scenarios.....	4
Simulation Results.....	5
3. Control FSM Verification.....	10
Module Description.....	10
Testbench Architecture.....	10
Test Scenarios.....	11
Simulation Results.....	12
4. Register bank Verification.....	16
Module Description.....	16
Testbench Architecture.....	16
Test Scenarios.....	17
Simulation Results.....	18
4. Top level wrapper Verification.....	22
Module Description.....	22
Testbench Architecture.....	22
Test Scenarios.....	22
Simulation Results.....	23

1. Verification description

This document presents the results of the initial verification phase for the VHDL modules developed in this project. The primary objective of this phase is to perform a first functional validation of each module individually through simulation.

The verification has been carried out using VHDL testbenches that rely on assertion-based checks to validate the expected behavior of the design. These assertions allow the simulation to automatically detect functional mismatches and ensure that the implemented logic behaves according to the intended specification.

For this first verification stage, each module has been tested independently. The document includes simulation waveform captures and relevant observations for each test case in order to illustrate the correct operation of the modules under different conditions.

It should be noted that this verification stage focuses on basic functional validation. In a later phase of the project, the verification environment will be extended using more advanced methodologies, including SystemVerilog-based testbenches, functional coverage, and a more structured verification framework. These improvements will enable a more comprehensive validation of the design and increase confidence in the correctness and robustness of the implementation.

2. AXI-Lite Slave Interface Verification

Module Description

The AXI-Lite Slave Interface module implements a memory-mapped interface compliant with the AXI4-Lite protocol. Its main function is to translate AXI-Lite bus transactions into a simplified internal register interface used by the rest of the design.

The module handles both read and write transactions through the standard AXI-Lite channels: write address, write data, write response, read address, and read data.

Additionally, the module performs basic protocol checks, including address alignment verification and address range validation. When an invalid or misaligned address is detected, the module returns an AXI-Lite slave error response (SLVERR).

Testbench Architecture

The testbench instantiates the design under test (DUT) and emulates the behavior of an AXI-Lite master.

A clock generator provides the system clock with a period of 10 ns, while a reset sequence initializes the DUT before the start of the tests. The testbench includes a simple register file model composed of six 32-bit registers representing the memory-mapped registers accessible through the AXI-Lite interface.

The register file reacts to the internal control signals generated by the DUT:

- *reg_write_en* triggers register updates.
- *reg_read_en* enables register read operations.

Two procedures are implemented to simplify the stimulus generation:

- *axi_write*: performs a complete AXI-Lite write transaction including address, data, and response handshake.
- *axi_read*: performs a complete AXI-Lite read transaction including address and read data handshake.

These procedures allow the testbench to generate multiple test scenarios while respecting the AXI-Lite handshake protocol.

Test Scenarios

A set of directed tests has been implemented using assertion-based verification. Each test stimulates a specific aspect of the AXI-Lite protocol behavior and checks the correctness of the module using VHDL assertions.

The following test scenarios are executed:

1. **Basic Write Transaction:** A write operation is performed to register 0. The test verifies that the write response is OKAY and that the register file is updated with the expected value.
2. **Write to Another Valid Register:** A write operation is issued to register 1 to confirm correct address decoding and register update behavior.
3. **Read Transaction Verification:** The value previously written to register 0 is read back and compared with the expected data.
4. **Read from Another Register:** A read operation is performed on register 1 to verify correct readback functionality.
5. **Partial Write Using Byte Strokes:** A write transaction using partial byte enables (*WSTRB*) verifies that only selected bytes of the register are updated.
6. **Misaligned Write Address:** A write transaction is attempted using a misaligned address. The expected response is an AXI-Lite slave error (*SLVERR*).

7. **Out-of-Range Write Address:** A write is issued to an address outside the valid register range. The module should return a `SLVERR` response.
8. **Misaligned Read Address:** A read transaction using a misaligned address verifies that the module detects alignment errors.
9. **Out-of-Range Read Address:** A read operation targeting an invalid address verifies correct error handling.
10. **Back-to-Back Write Transactions:** Multiple consecutive writes are issued to different registers to verify correct operation under continuous traffic.
11. **Write Followed by Immediate Read:** A write operation is immediately followed by a read to confirm that the updated data can be retrieved correctly.

Simulation Results

The simulation results confirm the correct functional behavior of the AXI-Lite Slave Interface module for all tested scenarios.

All transactions follow the expected AXI-Lite handshake protocol. Valid write transactions correctly update the internal register file, and subsequent read operations return the expected data values. The byte strobe functionality correctly enables partial register updates according to the specified write mask.

Error handling mechanisms were also verified. Misaligned and out-of-range addresses correctly trigger AXI-Lite slave error responses (`SLVERR`), demonstrating that the implemented address validation logic functions as intended.

The accompanying waveform captures illustrate representative transactions, including valid read and write operations, byte strobe behavior, and error responses for invalid accesses.

```
Analyzing design files
Elaborating axi_lite_slave_if testbench
Running axi_lite_slave_if_tb testbench. Waveforms saved to waves/waves_axi_lite_slave_if_tb.fst
axi_lite_slave_if_tb.vhd:231:9:@50ns:(report note): Test 1: Write to register 0 and verify response
axi_lite_slave_if_tb.vhd:241:9:@90ns:(report note): Test 2: Write to register 1 and verify response
axi_lite_slave_if_tb.vhd:251:9:@140ns:(report note): Test 3: Read back register 0 and verify data
axi_lite_slave_if_tb.vhd:262:9:@220ns:(report note): Test 4: Read back register 1 and verify data
axi_lite_slave_if_tb.vhd:275:9:@300ns:(report note): Test 5: Write with partial byte strobes (upper two bytes only)
axi_lite_slave_if_tb.vhd:285:9:@400ns:(report note): Test 6: Write to misaligned address -> expect SLVERR
axi_lite_slave_if_tb.vhd:293:9:@450ns:(report note): Test 7: Write to out-of-range address -> expect SLVERR
axi_lite_slave_if_tb.vhd:301:9:@500ns:(report note): Test 8: Read from misaligned address -> expect SLVERR
axi_lite_slave_if_tb.vhd:309:9:@580ns:(report note): Test 9: Read from out-of-range address -> expect SLVERR
axi_lite_slave_if_tb.vhd:317:9:@660ns:(report note): Test 10: Back-to-back writes to consecutive registers
axi_lite_slave_if_tb.vhd:331:9:@810ns:(report note): Test 11: Write then immediate read (reg 3)
axi_lite_slave_if_tb.vhd:342:9:@990ns:(assertion note): End of simulation - all tests passed
Opening waveform viewer (only if the fst file exists)
Test complete!
```

Figure 1 – Test results

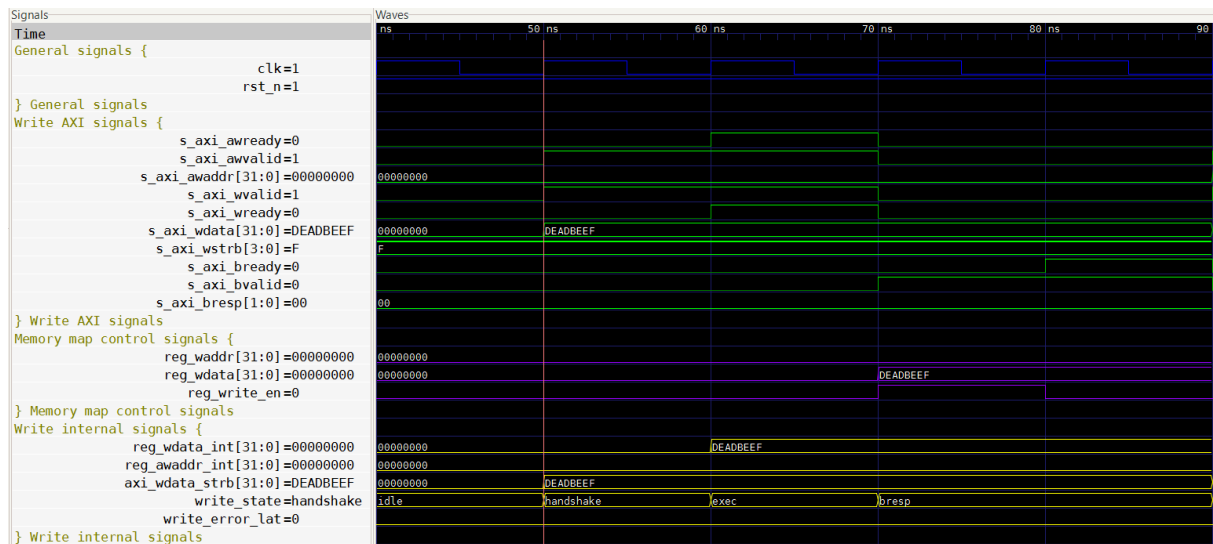


Figure 2 – Test 1: AXI-Lite Write Transaction (Register 0)

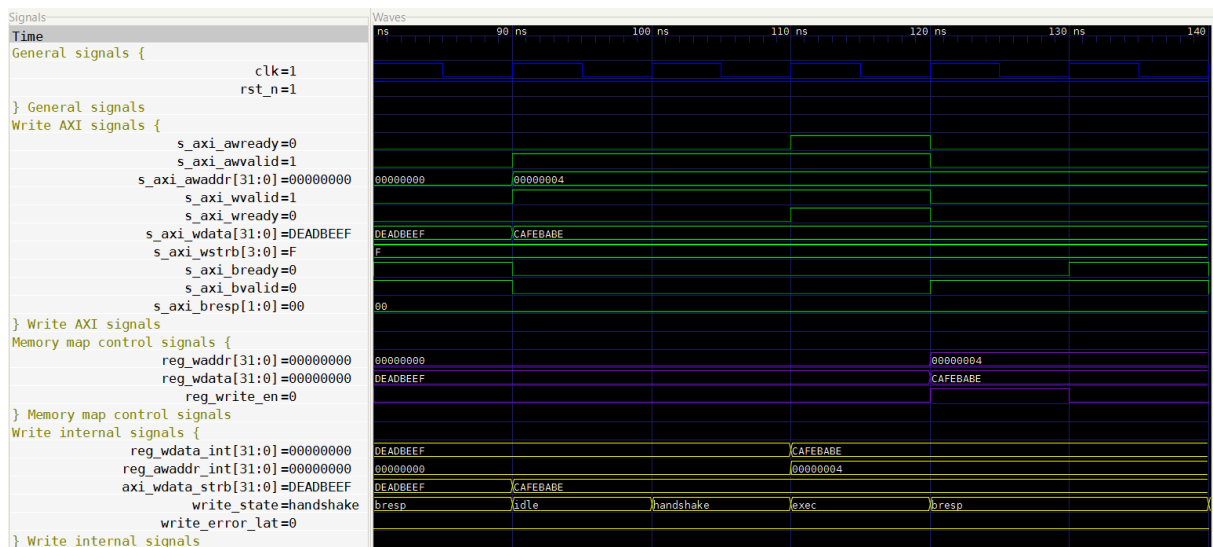


Figure 3 – Test 2: AXI-Lite Write Transaction (Register 1)

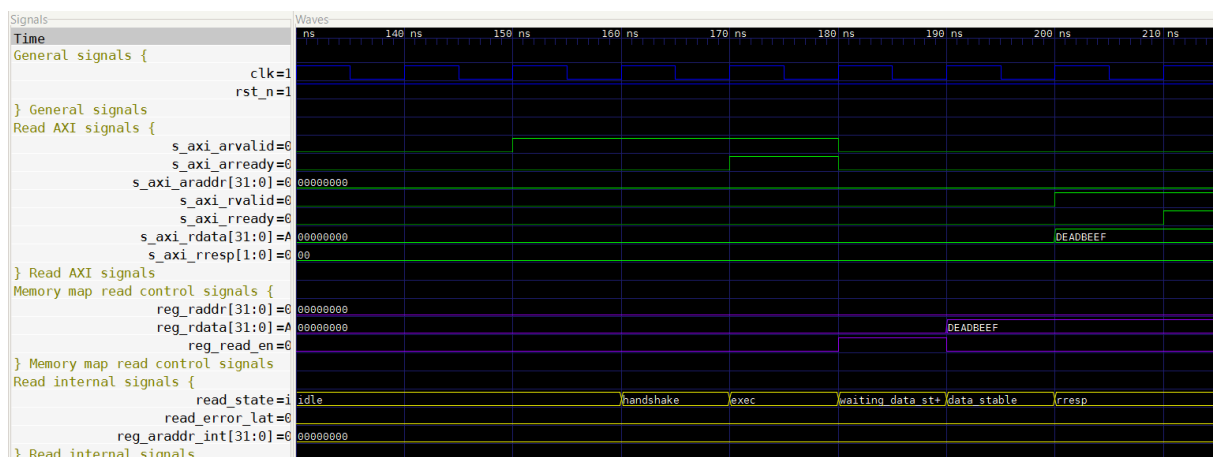


Figure 4 – Test 3: AXI-Lite Read Transaction (Register 0)

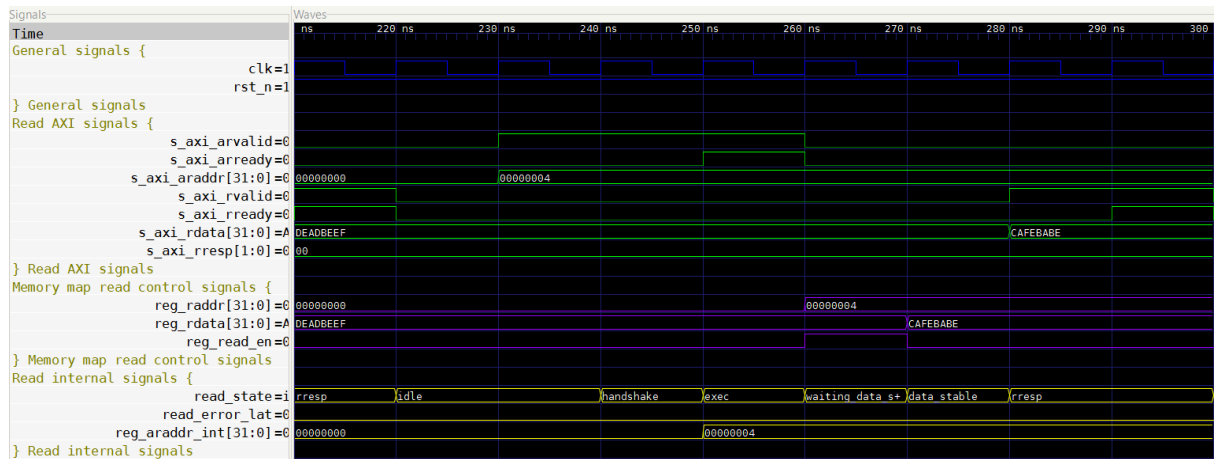


Figure 5 – Test 4: AXI-Lite Read Transaction (Register 1)

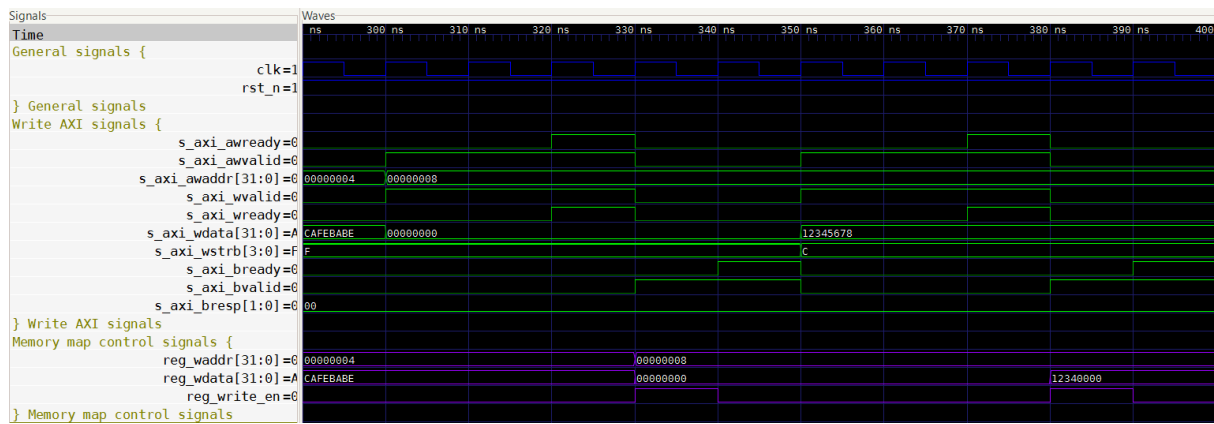


Figure 6 – Test 5: Partial Write Using Byte Strobes

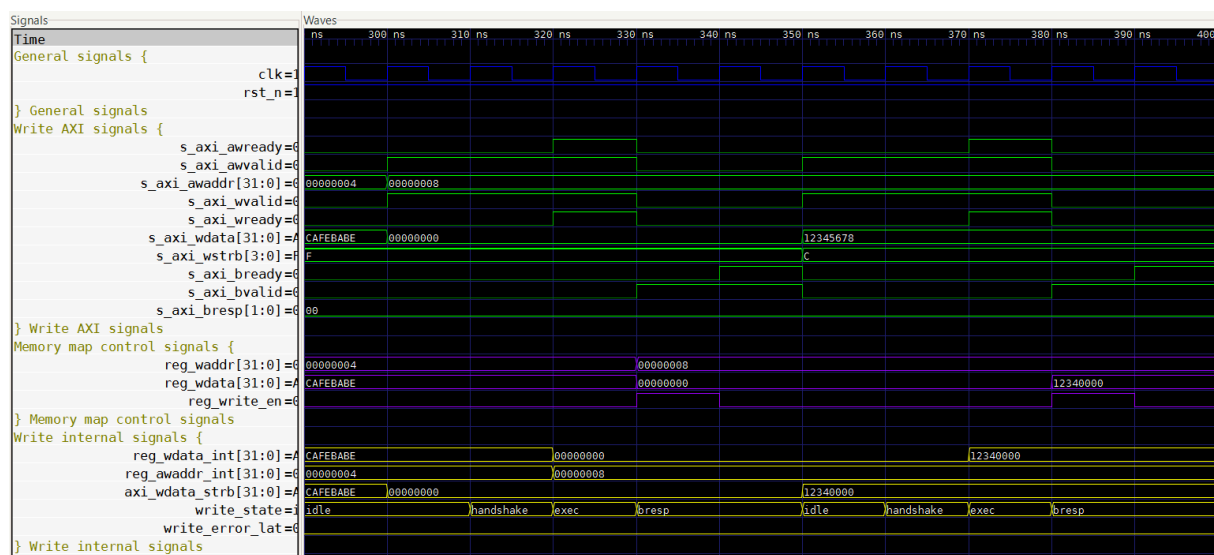


Figure 7 – Test 6: Misaligned Address Error Response

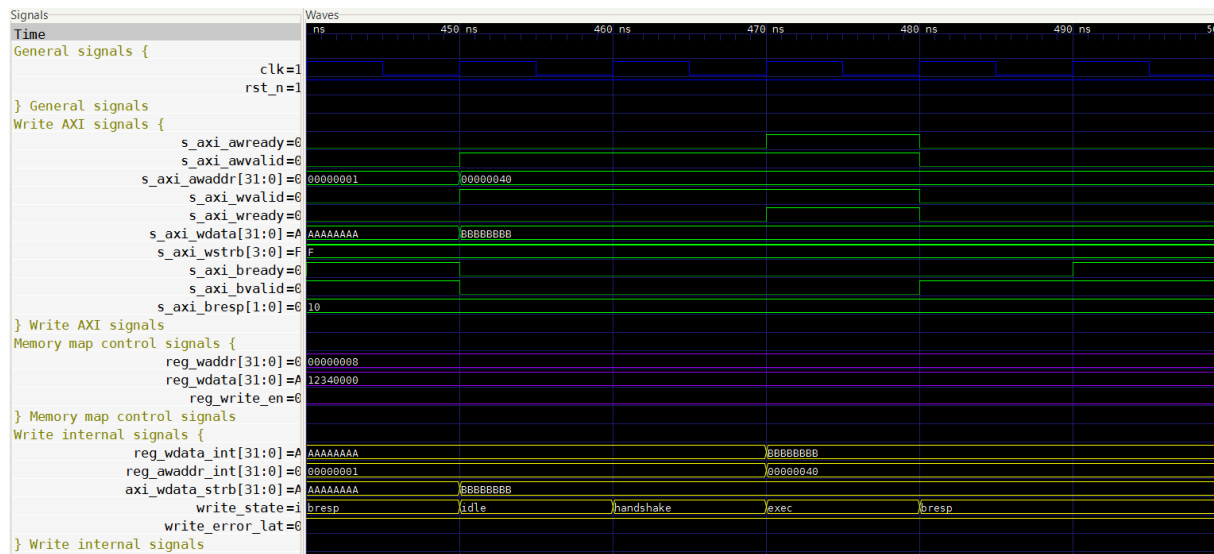


Figure 8 - Test 7: Out-of-Range Write Address

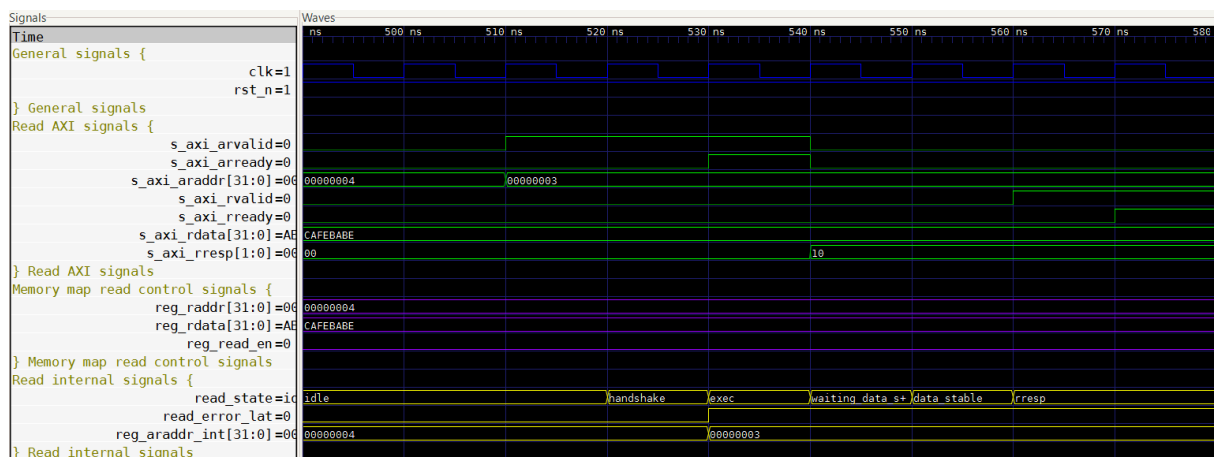


Figure 9 - Test 8: Misaligned Read Address



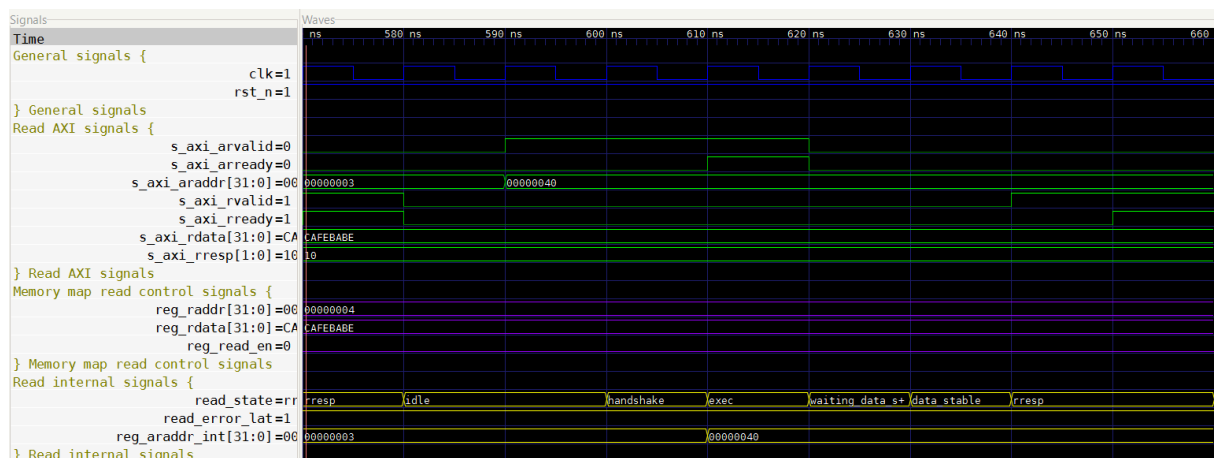


Figure 10 - Test 9: Out-of-Range Read Address

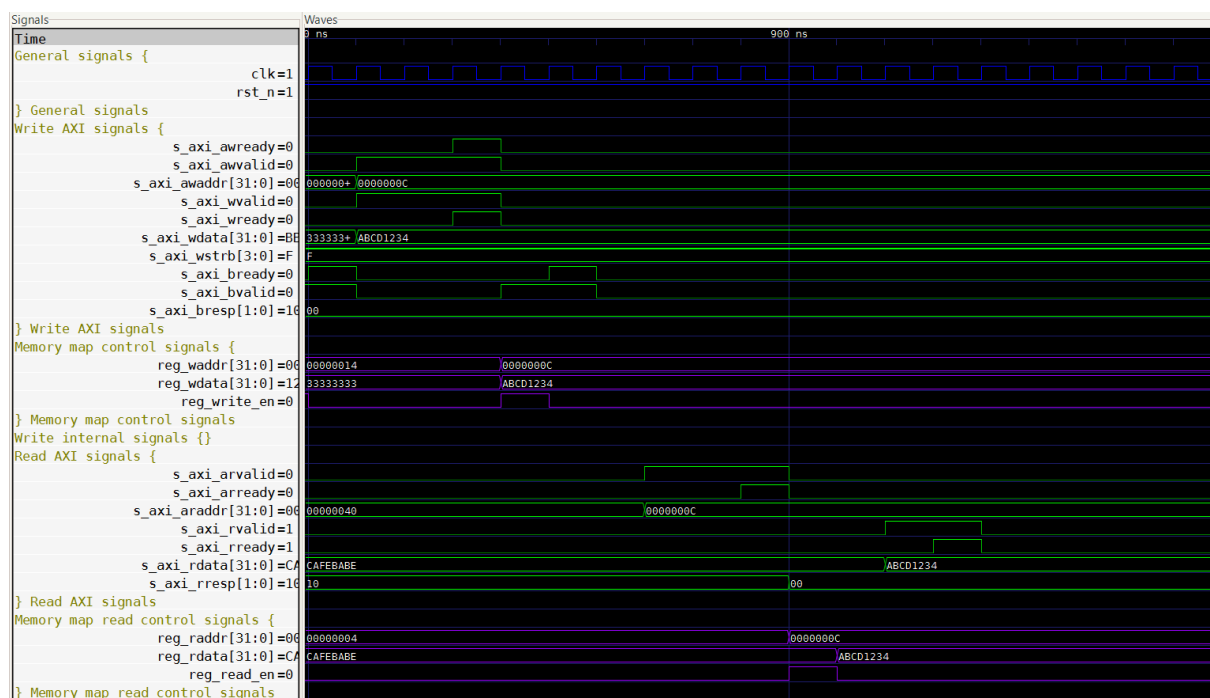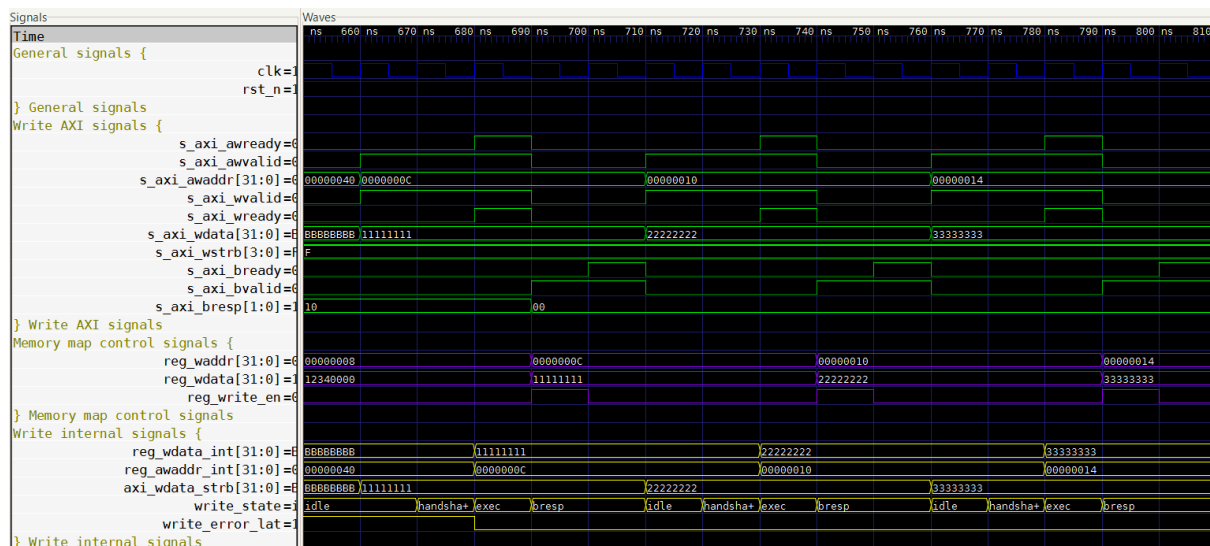

3. Control FSM Verification

Module Description

The Control FSM module implements the control logic responsible for coordinating communication between the memory-mapped register interface and an external FIR DSP processing module.

The module operates as a finite state machine that manages two main types of transactions: coefficient loading and sample processing. Input samples and configuration data are received through a register interface and forwarded to the DSP through streaming-style handshake signals.

The FSM includes four operational states:

- **IDLE** – default state where the module waits for new commands.
- **SEND** – an input sample is sent to the DSP.
- **WAIT_RESULT** – the FSM waits for the DSP to produce a processed output sample.
- **LOAD_COEFF** – a coefficient value is written to the DSP coefficient interface.

The module also generates status information through the `reg_status` signal, indicating whether the module is ready, busy, or in an error condition. Control signals such as `dsp_enable`, `dsp_reset`, and `dsp_mode` are passed through directly from the register interface to the DSP.

The FSM ensures correct sequencing of operations, manages handshake signals for streaming data transfers, and prevents invalid operations such as sending samples when the DSP is disabled or attempting to update coefficients while the DSP is active.

Testbench Architecture

The testbench instantiates the design under test (DUT) and drives the register interface and DSP handshake signals to emulate the behavior of the surrounding system.

A clock generator produces the system clock with a period of 10 ns, while a reset sequence initializes the FSM before the execution of the verification scenarios.

The testbench provides stimulus to both sides of the interface:

- **The register interface**, which controls the module through signals such as `reg_enable`, `reg_mode`, `reg_data_in`, `sample_write_strobe`, and `coeff_write_strobe`.
- **The DSP interface**, which emulates the behavior of the external DSP through signals such as `dsp_data_in_ready`, `dsp_data_out_valid`, and `dsp_data_out`.

Two helper procedures are used to simplify test stimulus generation:

- **clk_rise** – waits for a rising clock edge.
- **clk_fall** – waits for a falling clock edge.

These procedures ensure that inputs are applied during the stable half of the clock cycle so that the DUT samples them correctly at the next rising edge.

Test Scenarios

A set of directed tests has been implemented to validate the functional behavior of the FSM under different operating conditions.

The following verification scenarios are executed:

1. **Reset State:** The module is held in reset and all outputs are verified to remain in their safe default values. This ensures the FSM initializes correctly and no unintended control signals are asserted.
2. **Passthrough Signal Verification:** The signals *dsp_enable*, *dsp_reset*, and *dsp_mode* are verified to correctly mirror the corresponding register values. The test confirms that these signals update on the next clock cycle regardless of the FSM state.
3. **Valid Coefficient Write:** A coefficient write request is issued while the DSP is disabled. The test verifies that the FSM transitions from IDLE to LOAD_COEFF, generates a single-cycle write enable pulse, and forwards the correct coefficient address and data.
4. **Blocked Coefficient Write:** A coefficient write request is attempted while the DSP is enabled. The FSM must reject the operation, remain in IDLE, and report an error condition.
5. **Full Data Path Transaction:** A complete data processing transaction is executed. An input sample is sent to the DSP, the FSM waits for the result, and the processed output is captured and forwarded to the register interface. Handshake signals and status updates are verified during the process.
6. **Blocked Sample Transmission:** A sample write request is issued while the DSP is disabled. The FSM must reject the operation and generate an error status without initiating a data transfer.
7. **WAIT_RESULT State Hold:** The FSM is forced into the WAIT_RESULT state and the DSP output valid signal is intentionally delayed. The test verifies that the FSM remains in the waiting state and maintains the busy status until a valid result is received.
8. **Output Ready Pulse Width:** The *dsp_data_out_ready* signal is verified to produce a single clock-cycle pulse when capturing a DSP result, even if the DSP keeps the valid signal asserted for multiple cycles.
9. **Mode Update During Active Transaction:** Changes to the *reg_mode* register are applied while the FSM is processing a transaction. The test verifies that the updated mode propagates correctly to the *dsp_mode* signal without interfering with the FSM operation.

10. **Back-to-Back Coefficient Writes:** Two consecutive coefficient write operations are issued to verify that the FSM can correctly handle sequential transactions. Each operation must generate an independent write enable pulse and the FSM must return to the IDLE state between writes.

Simulation Results

The simulation results confirm the correct functional behavior of the Control FSM module across all tested scenarios.

The FSM transitions correctly between the IDLE, SEND, WAIT_RESULT, and LOAD_COEFF states according to the applied stimuli. Streaming handshake signals between the control logic and the DSP are generated with the correct timing and remain stable until the handshake is completed.

Coefficient write operations are correctly executed only when the DSP is disabled, while invalid operations are properly rejected and reported through the status signal. The data path verification confirms that input samples are correctly forwarded to the DSP and that the resulting processed data is captured and stored in the register interface.

Additional tests verify correct handling of extended wait periods, single-cycle handshake pulses, dynamic mode updates, and consecutive coefficient writes.

The accompanying waveform captures illustrate representative scenarios including coefficient loading, sample processing transactions, waiting for DSP results, and error handling conditions.

```
control_fsm_tb.vhd:178:9:@0ms:(report note): Test 1: Verifying output values during active reset (rst_n=0)
control_fsm_tb.vhd:223:9:@50ns:(report note): Test 2: Verifying passthrough signals mirror reg_enable/reg_reset/reg_mode
control_fsm_tb.vhd:263:9:@100ns:(report note): Test 3: Verifying coefficient write with enable=0 (valid path)
control_fsm_tb.vhd:296:9:@125ns:(report note): Test 4: Verifying coefficient write is blocked when enable=1
control_fsm_tb.vhd:332:9:@170ns:(report note): Test 5: Verifying full data path (enable=1, send sample, receive result)
control_fsm_tb.vhd:412:9:@270ns:(report note): Test 6: Verifying sample write is blocked when enable=0
control_fsm_tb.vhd:438:9:@300ns:(report note): Test 7: Verifying FSM stays in WAIT_RESULT until result is valid
control_fsm_tb.vhd:489:9:@400ns:(report note): Test 8: Verifying dsp_data_out_ready is exactly one cycle wide
control_fsm_tb.vhd:530:9:@470ns:(report note): Test 9: Verifying dsp_mode passthrough updates during SEND state
control_fsm_tb.vhd:582:9:@570ns:(report note): Test 10: Verifying back-to-back coefficient writes
control_fsm_tb.vhd:641:9:@660ns:(report note): End of simulation - all tests passed
Opening waveform viewer (only if the fst file exists)
Test complete!
```

Figure 13 – Test results

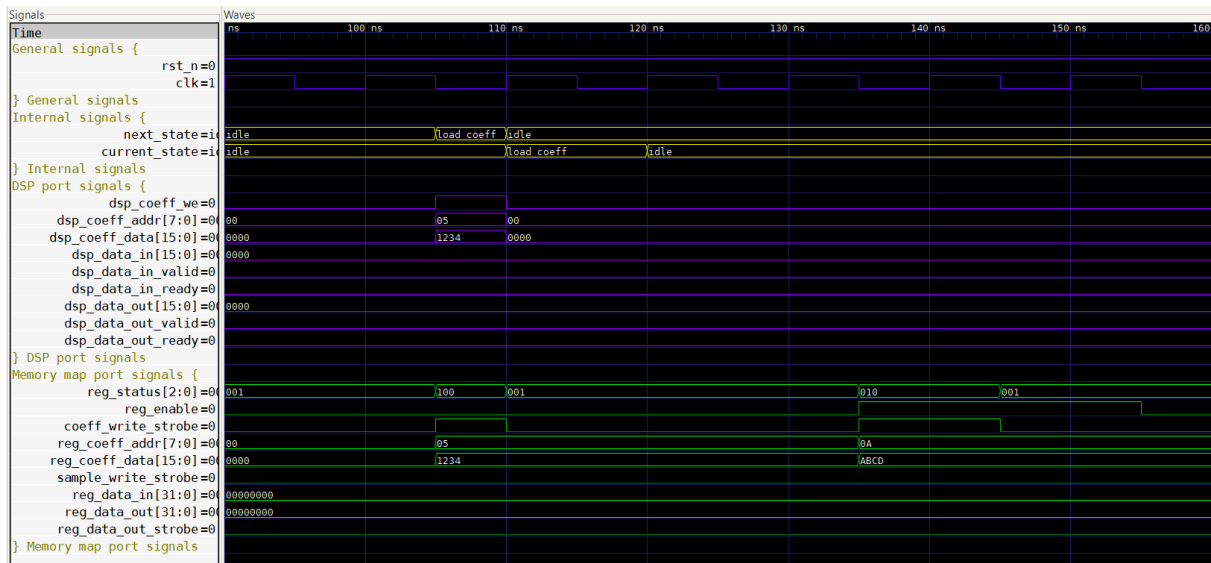


Figure 14 – Test 3 and 4

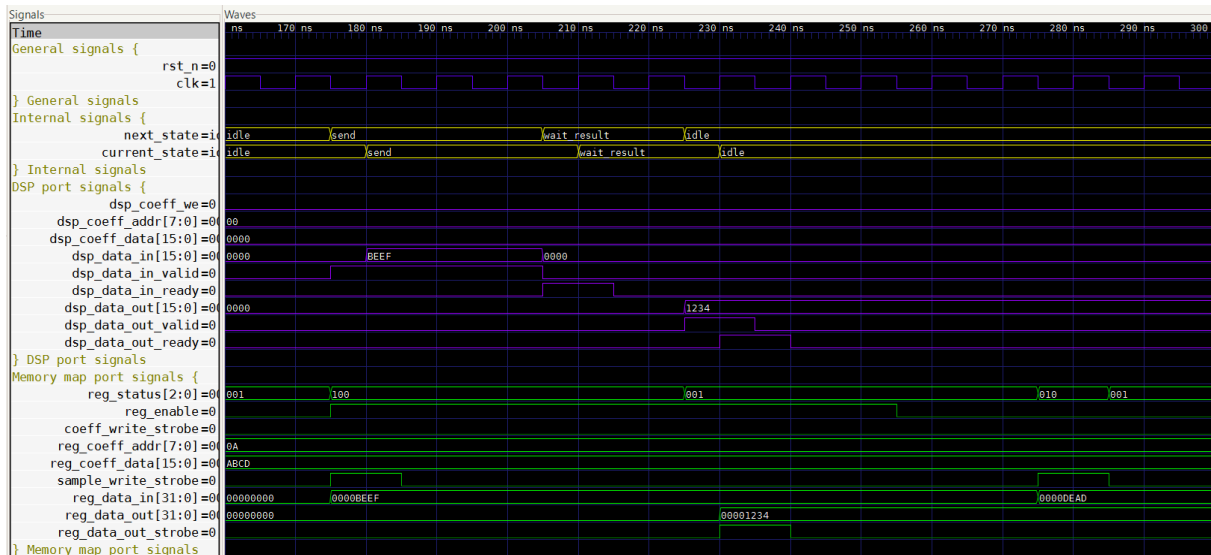


Figure 15 – Test 5 and 6

In test 5, `dsp_data_in_ready` must be asserted when `dsp_data_in_valid` is high. This is an error on the testbench.

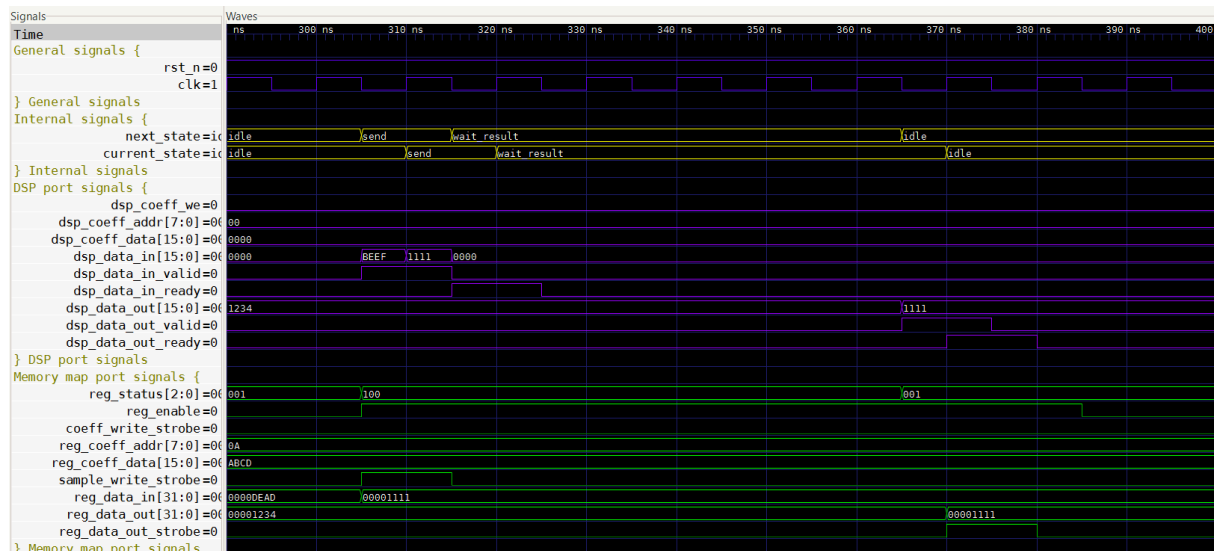


Figure 16 – Test 7

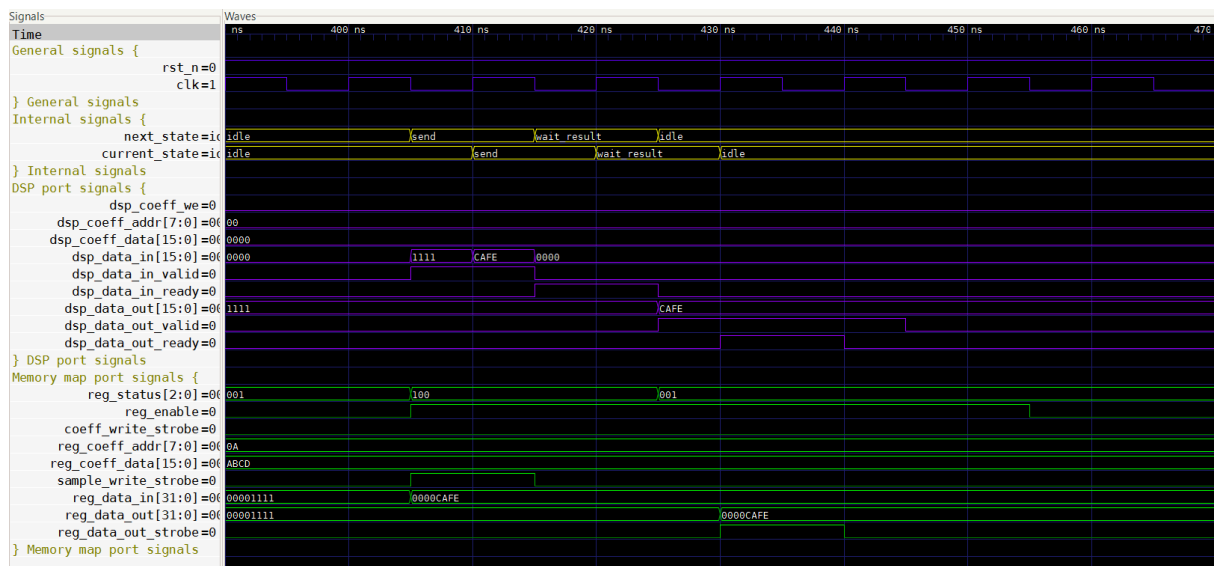


Figure 17 – Test 8

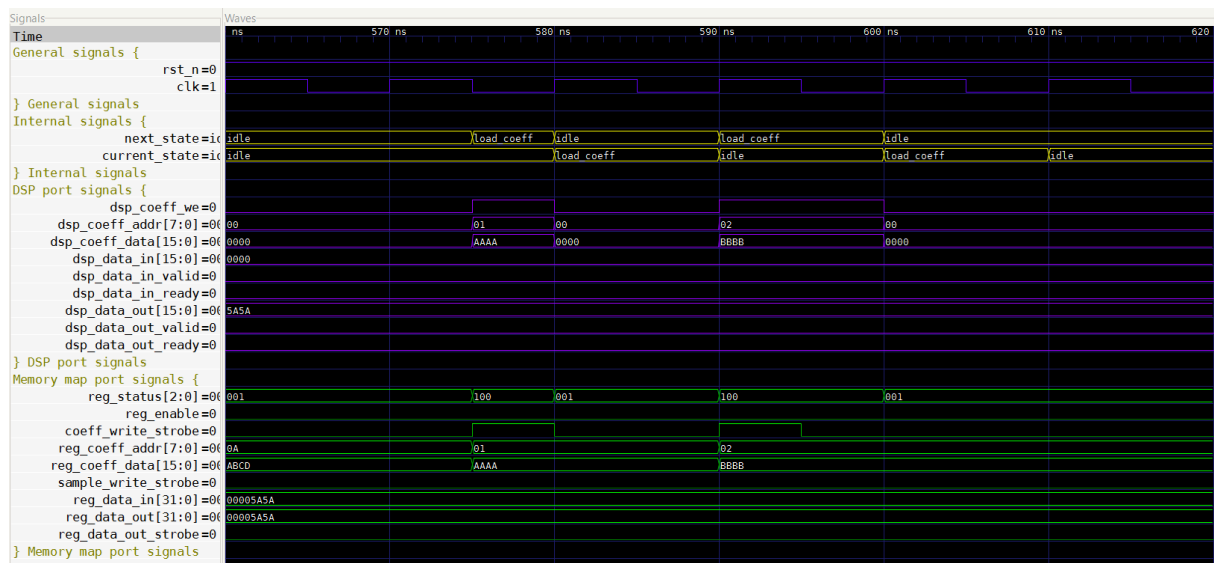


Figure 18 – Test 10

4. Register bank Verification

Module Description

The Register Bank module implements the memory-mapped register interface used to configure and monitor the DSP processing system. It acts as the bridge between the AXI-Lite slave interface and the control FSM by storing configuration parameters and forwarding control signals to the rest of the design.

The module contains several registers accessible through the internal register interface. These registers include control, status, configuration, and data registers used by the DSP control logic.

The main registers implemented in the module are:

- **CTRL register (0x00)** – Contains configuration bits controlling the DSP operation, including enable, reset, and operating mode selection.
- **STATUS register (0x04)** – Provides status information generated by the control FSM, including ready, error, and busy indicators. This register is read-only from the software perspective.
- **COEFF_DATA register (0x08)** – Stores the coefficient value that will be written to the DSP coefficient memory.
- **COEFF_ADDR register (0x0C)** – Contains the address of the DSP coefficient to be updated.
- **DATA_IN register (0x10)** – Holds the input data sample that will be sent to the DSP.
- **DATA_OUT register (0x14)** – Stores the processed data received from the DSP. This register is updated by hardware and is read-only from the software interface.

In addition to storing configuration data, the register bank generates control signals used by the control FSM. These include *sample_write_strobe* and *coeff_write_strobe*, which indicate when new data or coefficients have been written. The module also ensures that read-only registers cannot be modified through software writes and that reserved bits remain cleared.

Testbench Architecture

The testbench instantiates the design under test (DUT) and emulates the behavior of the internal register interface that would normally be driven by the AXI-Lite slave module.

A clock generator produces a system clock with a period of 10 ns, and a reset sequence initializes the DUT before the execution of the verification tests.

The testbench drives the following input signals:

- register write and read enable signals (*reg_write_en*, *reg_read_en*)

- register addresses (*reg_waddr*, *reg_raddr*)
- register write data (*reg_wdata*)
- status and data signals coming from the control FSM (*reg_status*, *reg_data_out*, *reg_data_out_strobe*)

The outputs of the register bank are monitored to verify correct behavior, including:

- configuration outputs (*reg_enable*, *reg_reset*, *reg_mode*)
- coefficient interface signals (*reg_coeff_data*, *reg_coeff_addr*)
- DSP input data (*reg_data_in*)
- control strobes (*sample_write_strobe*, *coeff_write_strobe*)
- read data (*reg_rdata*)

To simplify stimulus generation, several helper procedures are implemented in the testbench:

- **reg_write** – performs a complete register write transaction by asserting the write enable signal for a single clock cycle while providing the target address and write data.
- **reg_read** – performs a register read operation and allows the read data to be sampled from the combinational read path.

All functional checks are implemented using assertion-based verification, where the expected output behavior is validated using VHDL assertions after each stimulus sequence.

Test Scenarios

A set of directed tests has been implemented to verify the functional correctness of the register bank. Each test targets a specific aspect of the module behavior and validates the expected outputs using assertions.

The following test scenarios are executed:

1. **Reset State:** The module is held in reset to verify that all registers and outputs initialize to their safe default values. Control signals and write strobes must remain inactive during reset.
2. **CTRL Register Write and Readback:** A write operation to the CTRL register is performed to update the DSP enable, reset, and mode fields. The test verifies that the internal outputs are updated correctly and that the same values can be read back from the register.
3. **Reserved Bits Protection:** A write operation with all bits set is issued to the CTRL register. The test verifies that only the valid control bits are stored and that all reserved bits remain zero when read back.
4. **STATUS Register Read-Only Behavior:** A write attempt is issued to the STATUS register. The test verifies that the write operation is ignored and that the register contents remain controlled exclusively by the hardware status input.

5. **STATUS Register Update from FSM:** Changes applied to the reg_status input signal are verified to propagate correctly to the STATUS register and be visible through the read interface.
6. **Coefficient Data Write Operation:** A write to the COEFF_DATA register must update the coefficient value and generate a one-cycle coeff_write_strobe signal.
7. **Coefficient Address Write Operation:** Writing the COEFF_ADDR register must update the coefficient index and also generate a one-cycle coeff_write_strobe signal.
8. **Data Input Write Operation:** Writing to the DATA_IN register must update the input data value and generate a one-cycle sample_write_strobe signal that triggers sample processing in the control FSM.
9. **DATA_OUT Hardware Update:** The DATA_OUT register is updated by the control FSM through the reg_data_out_strobe signal. The test verifies that the register captures the incoming value correctly and that software write attempts are ignored.
10. **Write Priority over Simultaneous Read:** A scenario where both read and write operations occur in the same clock cycle is tested. The module must prioritize the write operation, suppress the read data during the conflict cycle, and commit the new value to the register.

Simulation Results

The simulation results confirm the correct functional behavior of the Register Bank module for all tested scenarios.

All registers correctly initialize to their defined reset values and respond appropriately to write and read operations. Writable registers update their contents according to the provided write data, while read-only registers ignore software write attempts and remain controlled exclusively by hardware signals.

The generation of control strobes for coefficient updates and sample input writes was verified to produce single-cycle pulses as expected. These signals are essential for synchronizing the register bank with the control FSM and DSP processing pipeline.

The STATUS register correctly reflects changes in the hardware status input, and the DATA_OUT register updates properly when triggered by the FSM strobe signal. Additionally, protection mechanisms for reserved bits and read-only registers were validated successfully.

The accompanying waveform captures illustrate representative test cases, including register writes, readback operations, hardware-driven register updates, and the generation of control strobes for DSP operations.

```

register_bank_tb.vhd:184:9:@0ms:(report note): Test 1: Verifying reset state
register_bank_tb.vhd:226:9:@50ns:(report note): Test 2: Verifying CTRL register write and readback
register_bank_tb.vhd:267:9:@115ns:(report note): Test 3: Verifying CTRL reserved bits are forced to zero
register_bank_tb.vhd:292:9:@175ns:(report note): Test 4: Verifying STATUS register is read-only
register_bank_tb.vhd:322:9:@235ns:(report note): Test 5: Verifying STATUS register tracks reg_status changes
register_bank_tb.vhd:366:9:@310ns:(report note): Test 6: Verifying COEFF_DATA write generates one-cycle coeff_write_strobe
register_bank_tb.vhd:395:9:@335ns:(report note): Test 7: Verifying COEFF_ADDR write generates one-cycle coeff_write_strobe
register_bank_tb.vhd:438:9:@385ns:(report note): Test 8: Verifying DATA_IN write generates one-cycle sample_write_strobe
register_bank_tb.vhd:475:9:@415ns:(report note): Test 9: Verifying DATA_OUT updates from FSM strobe and is read-only
register_bank_tb.vhd:524:9:@485ns:(report note): Test 10: Verifying write takes priority over simultaneous read
register_bank_tb.vhd:566:9:@595ns:(report note): End of simulation

```

Figure 19 – Test results

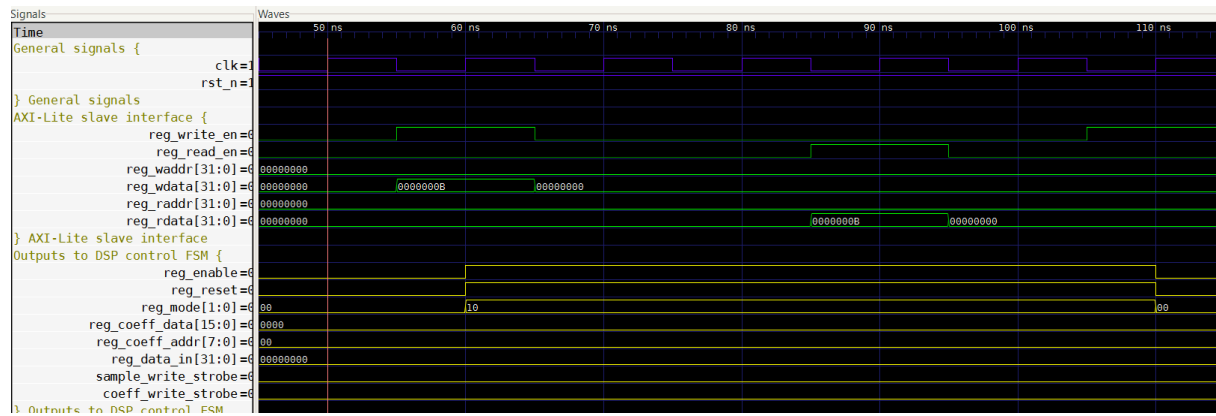


Figure 20 - Test 2

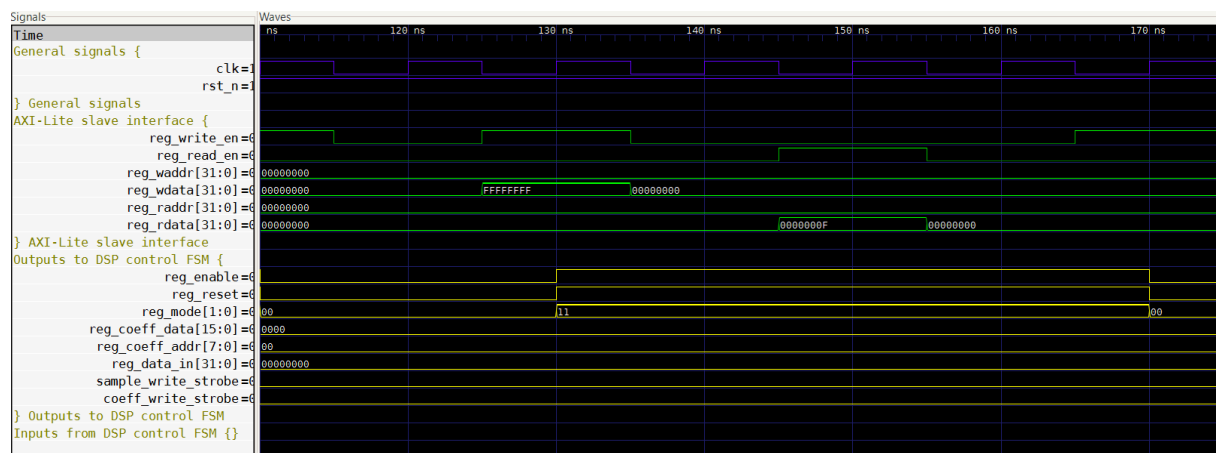


Figure 21 - Test 3

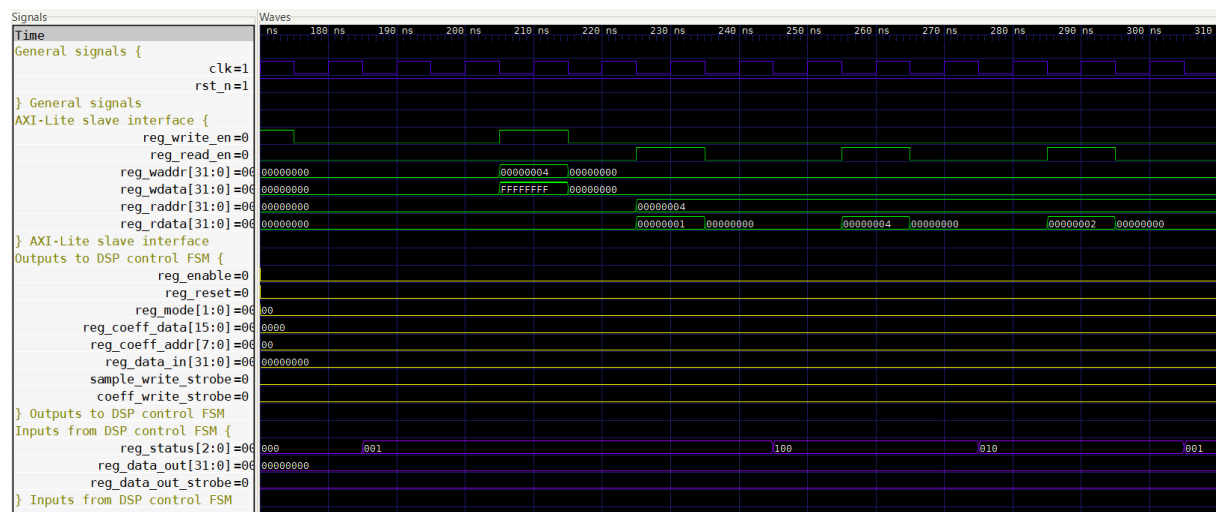


Figure 22 - Test 4 and 5

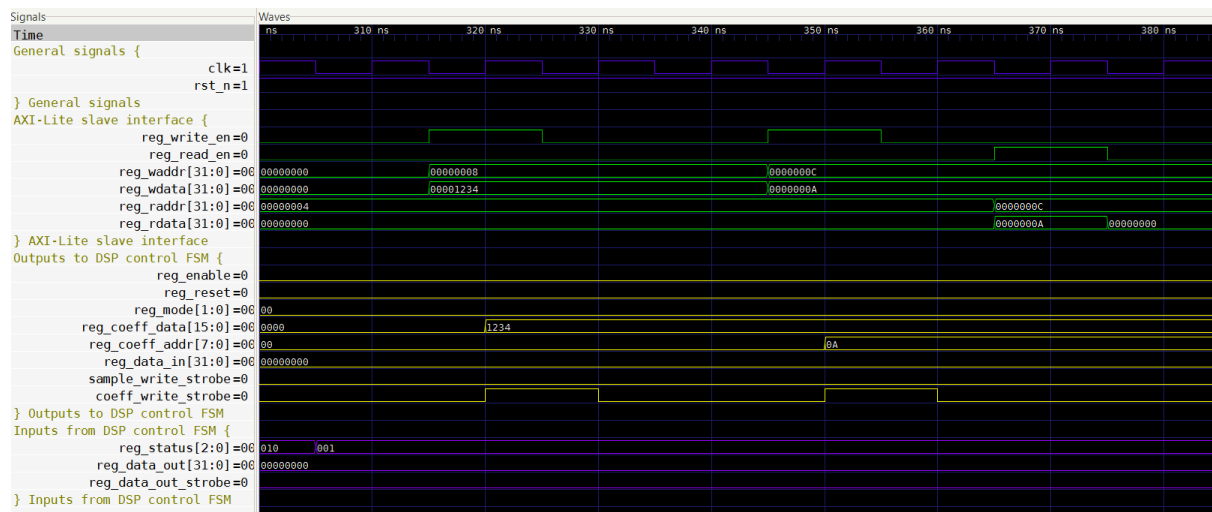


Figure 23 - Test 6 and 7

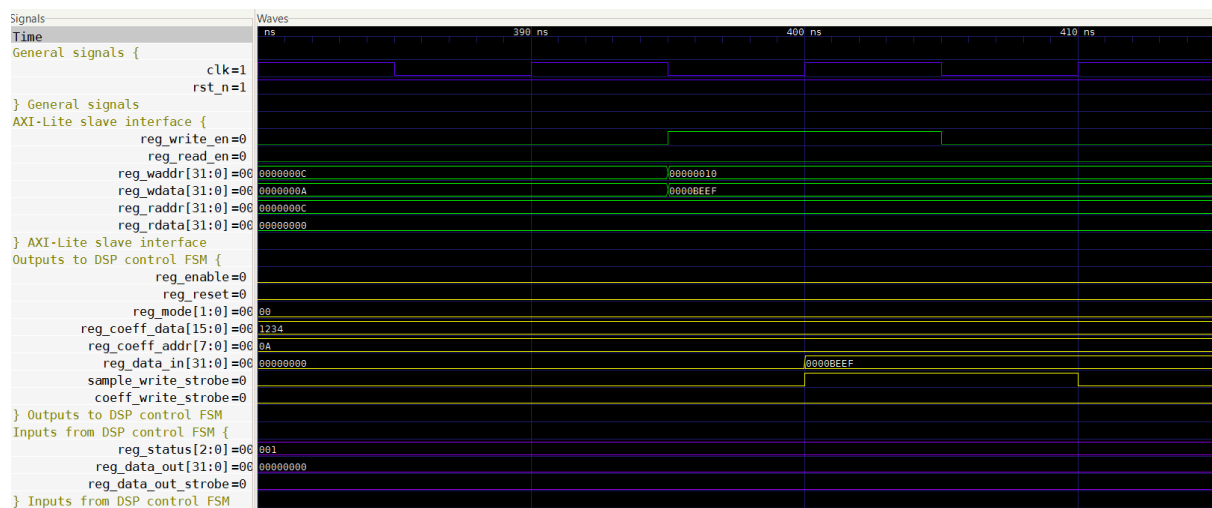


Figure 24 - Test 8

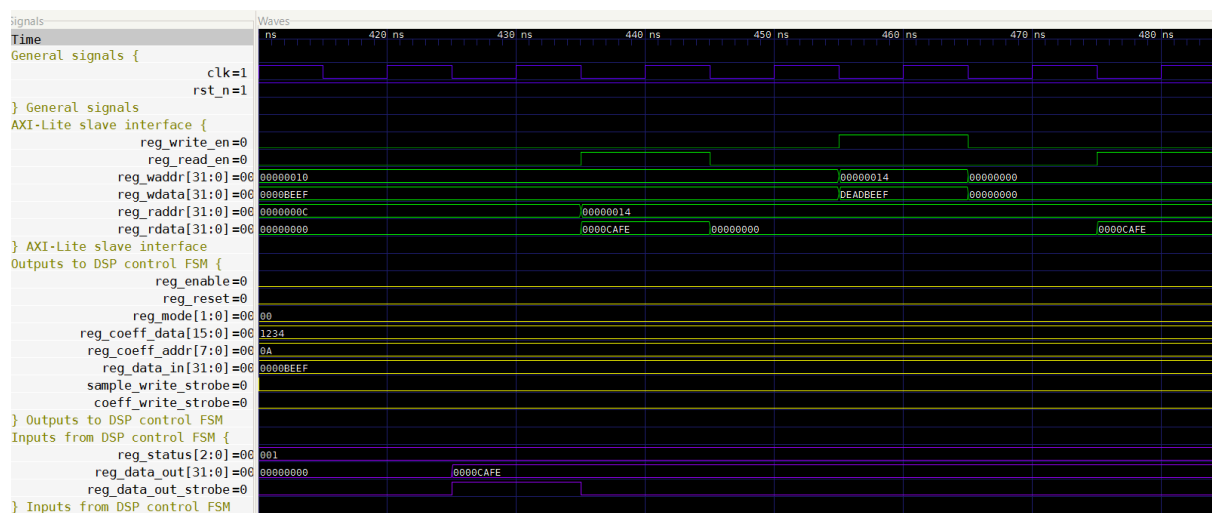


Figure 25- Test 9

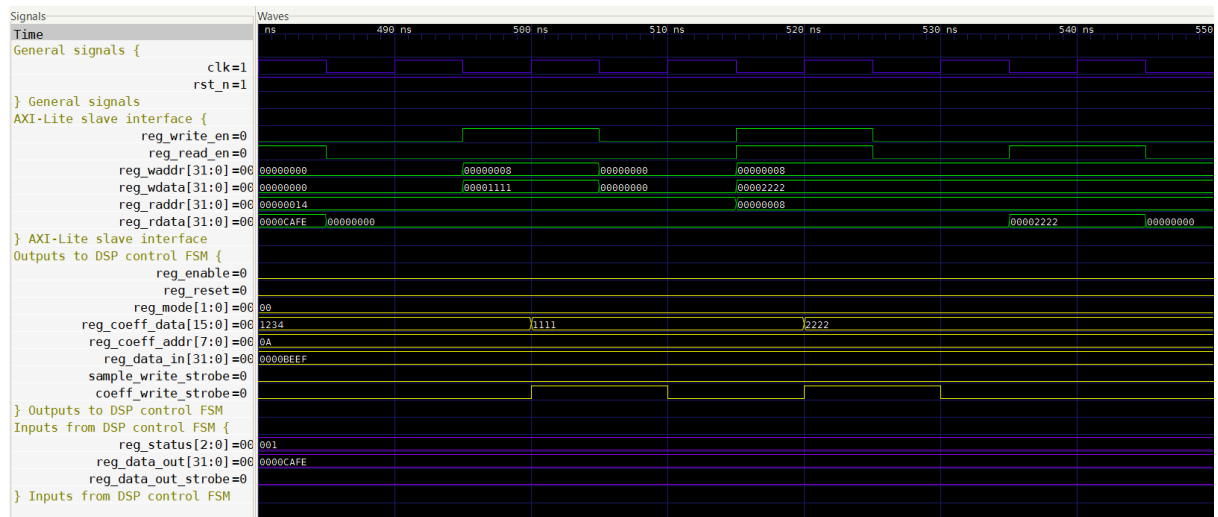


Figure 26 - Test 10

4. Top level wrapper Verification

Module Description

The Top-Level Wrapper module integrates all the main components of the design, including the AXI-Lite slave interface, the register bank, and the control FSM that manages interaction with the DSP core.

Testbench Architecture

Unlike the testbenches developed for the previous modules, which were written in VHDL, this verification environment is implemented in SystemVerilog, marking a step towards the more structured methodology planned for later stages of the project.

The testbench follows a layered architecture that separates concerns across distinct components, inspired by the separation of roles used in UVM-based environments.

- **Interfaces:** Two SystemVerilog interfaces encapsulate the signal groups exposed by the DUT. The *axi_lite_if* interface bundles all AXI-Lite signals and defines a clocking block with synchronous input sampling (#1step before the clock edge) and registered output driving, eliminating race conditions between the testbench and the DUT. Three modports restrict signal access by role: TB for the testbench (clocking block only), DUT for the device under test, and MONITOR for passive observation. The *external_dsp_if* interface applies the same pattern to the DSP-side signals, defining which signals the testbench drives (DSP outputs: *dsp_data_out*, *dsp_data_in_ready*, *dsp_data_out_valid*) and which it samples (DUT outputs to the DSP).
- **AXI_Transaction class:** A dedicated class acts as a data container for a single AXI-Lite transfer. It holds the transaction type (read or write), address, data, byte strobe, and response fields. Keeping this class independent of the interface allows it to be shared across the driver and scoreboard without introducing interface dependencies.
- **AXI_Driver class:** The driver class owns the sole reference to the *axi_lite_if*. TB virtual interface and is the only component that directly toggles AXI signals. It exposes two main tasks (write and read) which implement the full AXI-Lite handshake sequences. The write task uses a *fork/join_any* construct to handle the address/data channel handshake and the write response channel concurrently, reflecting the independence of these channels in the protocol. Results are written back into the *AXI_Transaction* object passed by reference, so the rest of the testbench never needs to access the interface directly. The driver also provides utility sampling functions (*sample_bvalid*, *sample_arready*, *sample_rvalid*) and a *wait_cycles* task, further reducing any need for external access to the interface.
- **Scoreboard class:** The scoreboard collects pass/fail results from assertion checks performed throughout the test sequence. Each check call receives a signal name, a boolean condition, and a descriptive message; failures are logged with \$error and counted. The class provides per-test reporting through *init_test* and *test_report*, and a final *general_report* summarising the overall outcome.

- **Monitor module:** A passive monitor module observes both the AXI-Lite and DSP interfaces through their MONITOR modports and displays key handshake events to the simulation log, including write address, write data, write response, read address, read data, and DSP data transfers.
- **Top-level module and test program:** The top-level module instantiates the DUT, both interfaces, the monitor, and the test module. To avoid the race conditions that can arise with program blocks in some simulators, the test logic is implemented as an automatic module instead, which achieves the same reactive-region sampling behaviour through the clocking blocks defined in the interfaces. The test module instantiates the AXI_Driver and Scoreboard objects and orchestrates the full test sequence. DSP-side stimulus (asserting *dsp_data_in_ready*, *dsp_data_out_valid*, and driving *dsp_data_out*) is applied directly in the test module, as no separate DSP driver class has been introduced at this stage.

A 100 MHz clock is generated with a 10 ns period, and a reset sequence holds *rst_n* low for 20 ns before releasing it.

Test Scenarios

A comprehensive set of integration tests validates both the internal functionality of the system and its compliance with the AXI-Lite protocol. Each test creates AXI_Transaction objects, delegates protocol execution to the AXI_Driver, and passes the results to the Scoreboard for checking.

The following verification scenarios are executed:

1. **Reset State:** Verifies that all AXI output signals (*bvalid*, *arready*, *rvalid*) and all DSP control outputs (*dsp_enable*, *dsp_reset*, *dsp_data_in_valid*, *dsp_data_out_ready*, *dsp_coeff_we*) are at their safe default values while reset is asserted.
2. **AXI Write to CTRL and Readback:** Writes *enable=1*, *reset=1*, and *mode=2* to the CTRL register via AXI and verifies that the corresponding DSP control outputs update correctly. The CTRL register is then read back through AXI and the returned data is checked against the expected value.
3. **Reserved Bits Protection:** Writes 0xFFFFFFFF to the CTRL register and reads it back, verifying that only bits [3:0] are stored and that the upper 28 bits are forced to zero throughout the full AXI-to-register path.
4. **CTRL to DSP Propagation:** Writes the *enable* bit in isolation to the CTRL register and verifies that *dsp_enable* is asserted while *dsp_reset* and *dsp_mode* remain unchanged. Clearing the bit is also checked.
5. **STATUS Register Read-Only Behavior:** Attempts a software write to the STATUS register and verifies that the register contents remain unchanged. The AXI slave is expected to accept the transaction and return an OKAY response despite ignoring the write data.
6. **Coefficient Data Write Path:** With the DSP disabled, writes a coefficient value to the COEFF_DATA register. A *fork/join_any* construct monitors *dsp_coeff_we* concurrently with the AXI write, capturing the coefficient data on the cycle when the write enable pulse is asserted. The following cycle is also checked to confirm that the pulse deasserts after exactly one clock cycle.

7. **Coefficient Address Write Path:** Applies the same approach as test 6 to the COEFF_ADDR register, verifying that the correct coefficient address appears on dsp_coeff_addr during the write enable pulse, and that the pulse deasserts one cycle later.
8. **DATA_IN Write and DSP Handshake:** Enables the DSP and writes a sample to the DATA_IN register. Once the FSM enters the SEND state, the test checks that dsp_data_in_valid is asserted and that the correct sample value appears on dsp_data_in. The signal is also verified to remain asserted across an additional clock cycle. The testbench then drives dsp_data_in_ready to complete the handshake and confirms that dsp_data_in_valid deasserts.
9. **DSP Result Capture and AXI Readback:** With the FSM in WAIT_RESULT, the testbench drives dsp_data_out_valid and dsp_data_out to simulate a result from the DSP. After waiting two cycles to allow stable sampling, the test verifies that dsp_data_out_ready is asserted for exactly one clock cycle and then deasserts. The captured result is subsequently read back via AXI from the DATA_OUT register and checked for correctness.
10. **End-to-End Data Path Validation:** Writes a coefficient value to COEFF_DATA and immediately reads it back via AXI, verifying data integrity across the complete AXI-to-register-bank-to-AXI path, including correct zeroing of the reserved upper bits.
11. **AXI Write Response (OKAY):** Confirms that a write to a valid, word-aligned address completes with BRESP = 2'b00 (OKAY).
12. **AXI Write Response (SLVERR):** Issues a write to an out-of-range address and verifies that BRESP = 2'b10 (SLVERR) is returned.
13. **AXI Read Response (SLVERR):** Issues a read from an out-of-range address and verifies that RRESP = 2'b10 (SLVERR) is returned with RDATA = 0x00000000.
14. **FSM WAIT_RESULT Behavior:** Enables the DSP and writes a sample to DATA_IN to trigger a SEND transaction. After the data-in handshake is completed, the STATUS register is read via AXI across four consecutive cycles to confirm that STATUS.BUSY (bit 2) remains asserted and STATUS.READY (bit 0) remains deasserted throughout the wait. A result is then delivered through the DSP interface, and STATUS is read once more to confirm that BUSY clears and READY is set.