

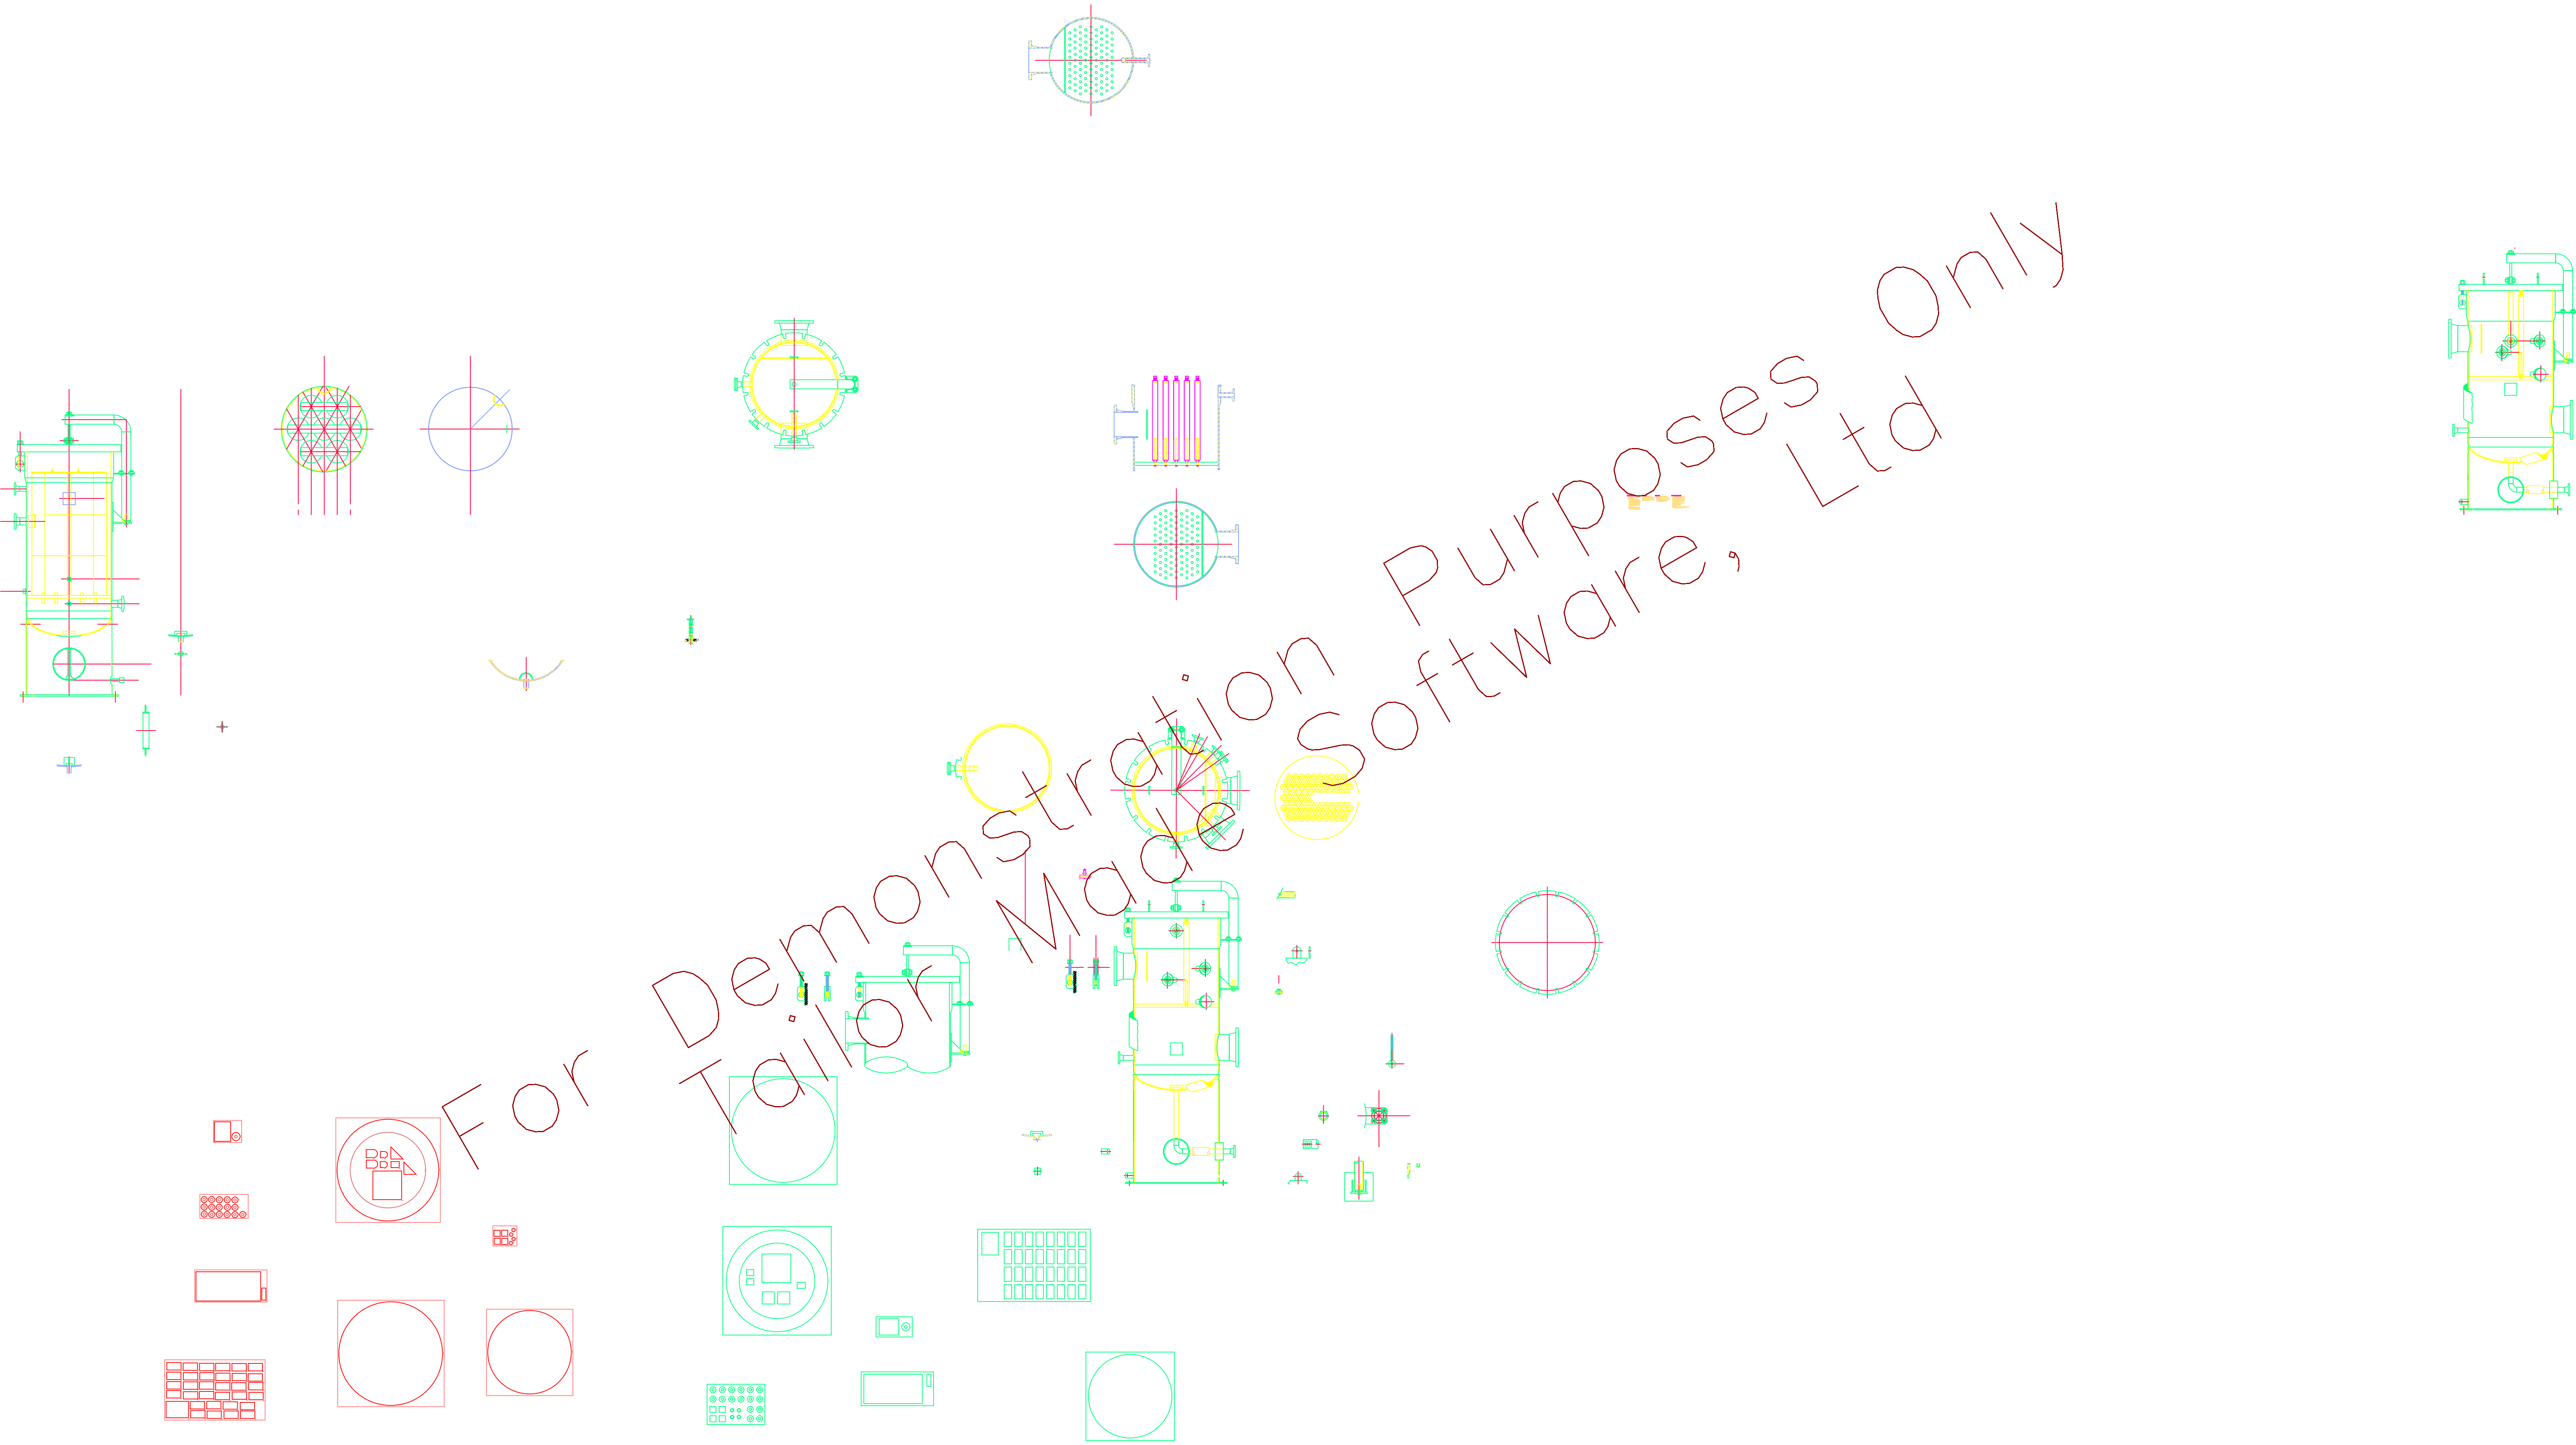


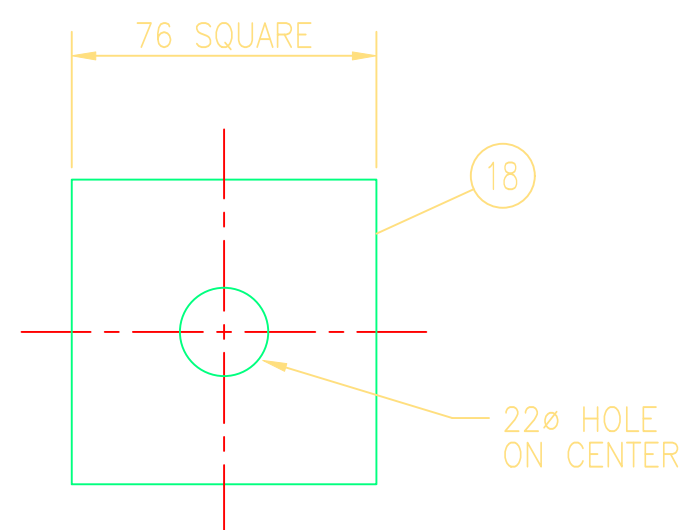

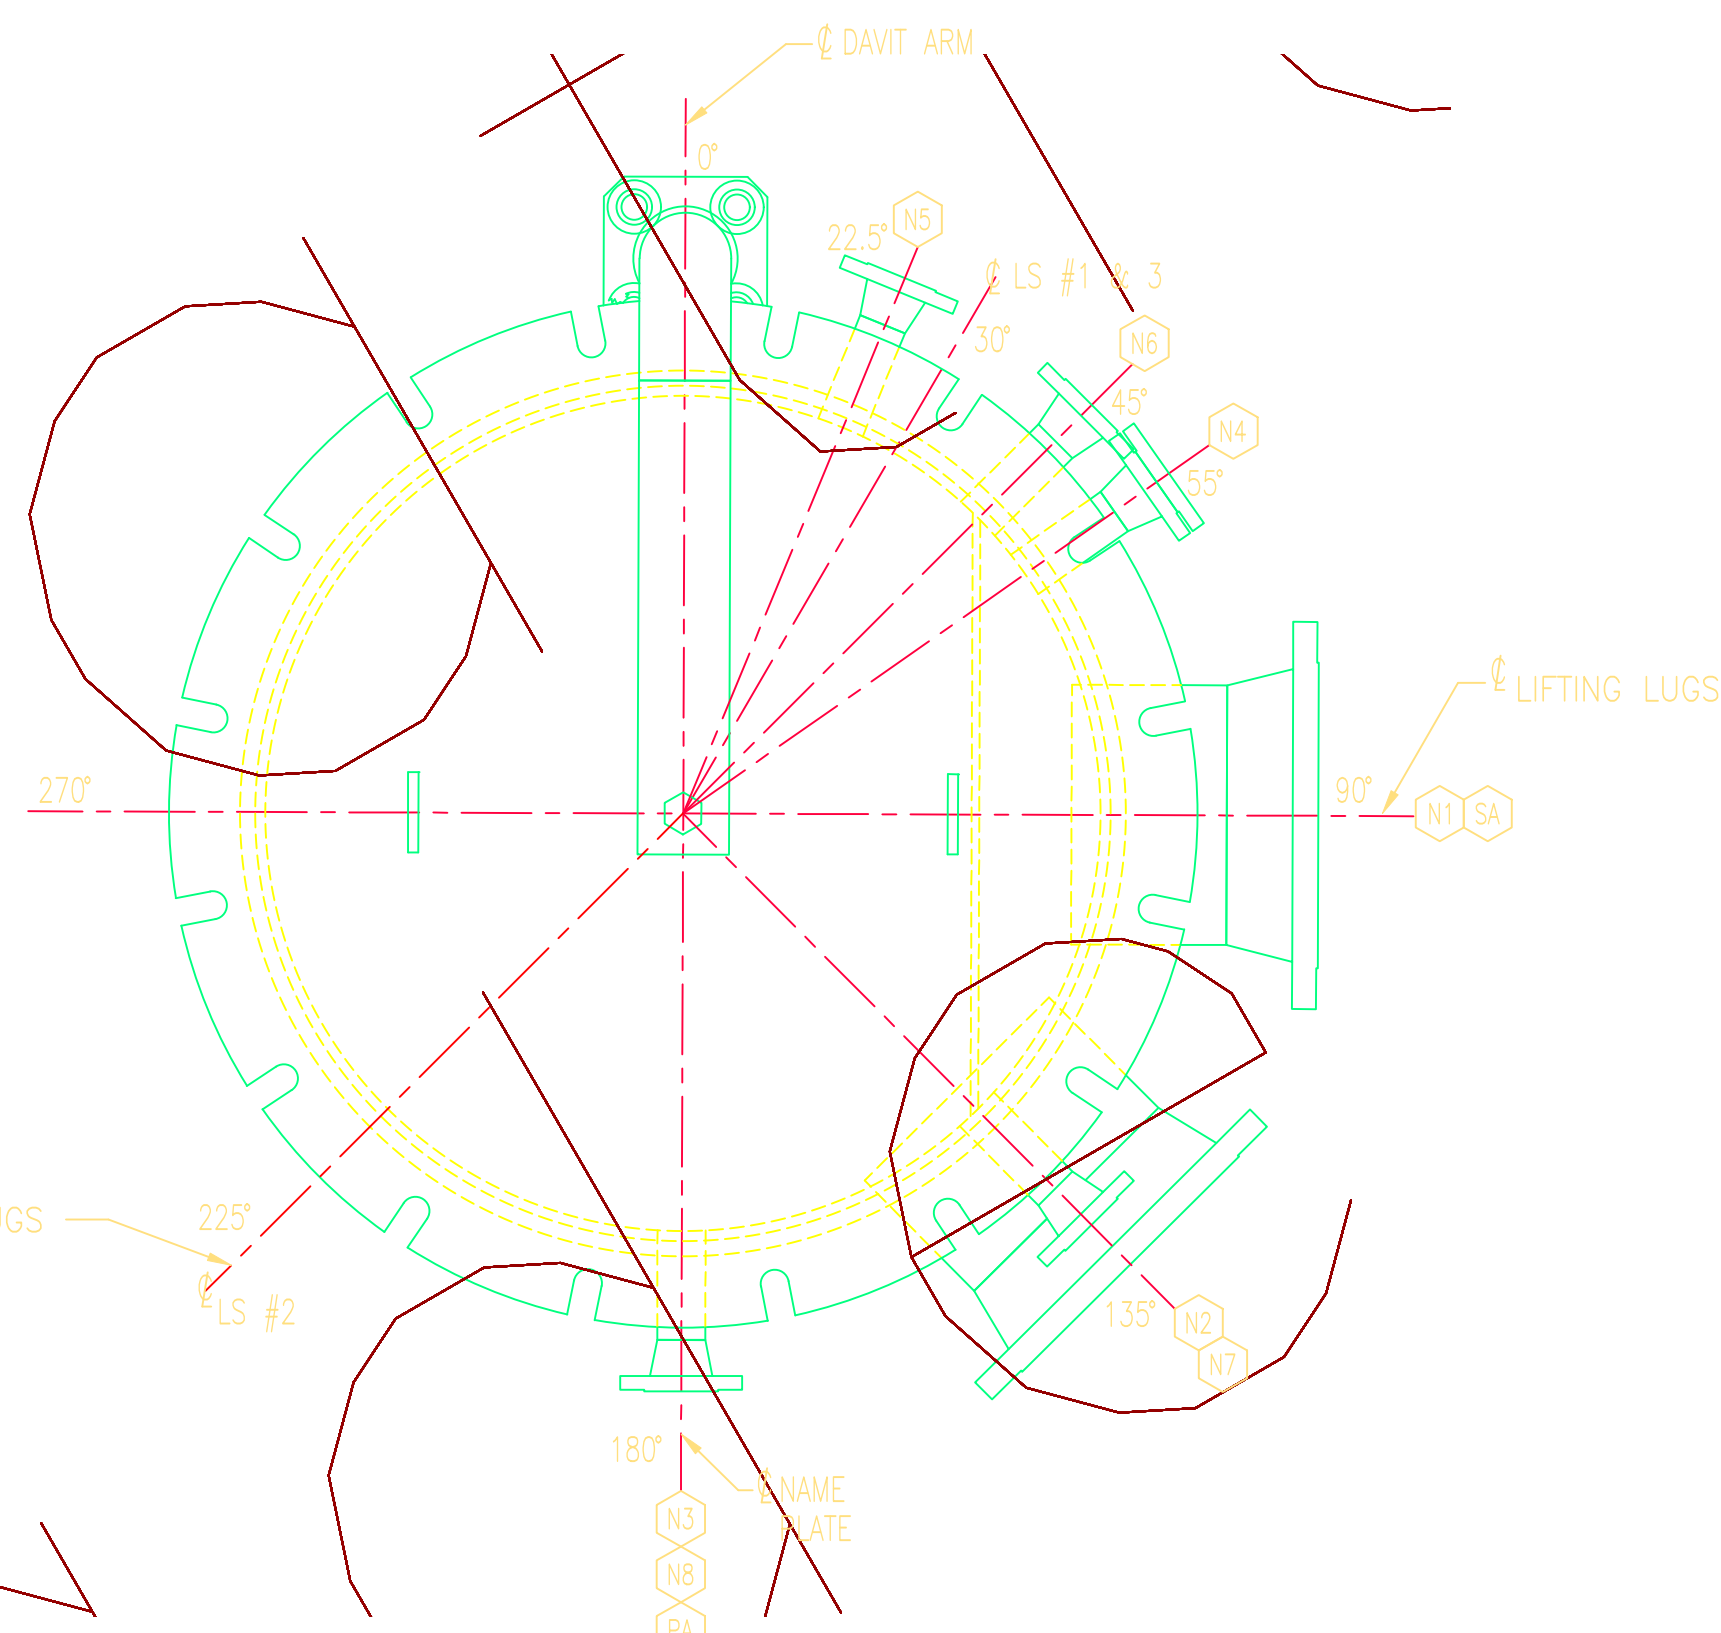

1. DO NOT PROFILE INTERNAL PROJECTIONS UNLESS SPECIFIED.
2. FABRICATOR TO DETERMINE WELD PREPARATION
3. SHELL/HEAD TO NOZZLES WELD TO BE DETERMINED BY FABRICATOR
4. FILLET WELDS SIZES SHOWN ARE A MINIMUM

GENERAL NOTES		GENERAL NOTES	
DATE: 2004/09/21 11:49 AM J:\JOBS02\020153\20-DRAWINGS\FAB\VS\FLT-020153-2060.DWG arida			

[illegible]

APPROVED		DRAWN	
MECH./STRUCT.	J. RUST	BY	M.BAHADORI
DATE	06/30/03	DATE	06/16/03
ELECTRICAL		CHECKED	
DATE		BY	D. PATIL
PROJECT	R. REYNOLDS	DATE	06/30/03
DATE	04/08/12		
		SCALE	AS NOTED

NOZZLE SCHEDULE							
MK	SIZE	RATING	FACING	SCH	SERVICE	EXT. PRO	WELD
N1	12"	150#	RFWN	STD	AMINE INLET	250	10/14
N2	12"	150#	RFWN	STD	AMINE OUTLET	250	10/14
N3	2"	150#	RFWN	160	DRAIN	SPEC	11/14
N4	2"	150#	RFWN	160	SLUDGE CLEANOUT c/w BLIND	200	12/14
N5	2"	150#	RFWN	160	VENT TO LP FLARE	200	10/14
N6	2"	150#	RFWN	160	PURGE GAS	200	10/14
N7	2"	150#	RFWN	160	PSV	200	10/14
N8	2"	150#	RFWN	160	PI	200	10/14
M1	42"	—	—	—	MANWAY c/w SWINGBOLT CLOSURE	—	—
SA	12"	—	PIPE	STD	SKIRT ACCESS	50	SPEC.
PA	8"	—	PIPE	STD	PIPE ACCESS	50	SPEC.

BILL OF MATERIAL			
ITEM	QUA	PART NO.	DESCRIPTION
34-5	1	1	SHELL: 12.7 THK x 1448 LG (ROLL TO 1067 O/D) SA-516-70N
34-6	2	1	SHELL: 31.75 THK x 430 LG (ROLL TO 1042 I/D) (SEE MACH. DETAIL) SA-516-70N
34-5	3	1	HEAD: 1067 O/D x 12.7 NOM (11.11 MIN) 2:1 SE w/ 51 SF SA-516-70N
34-6	4	1	PLATE: 76.2 THK. x 1289 O/D (MACH TO SUIT) SA-516-70N
34-5	5	1	PLATE: 6.35 THK x 1415 LG (ROLL TO 1067 O/D) SA-516-70N
34-6	6	1	PLATE: 12.7 THK. x 1265 O/D x 940 I/D SA-516-70N
34-5	7	2	FLG: 324 - 150# RFWN STD BORE SA-105N
34-6	8	6	FLG: 60 - 150# RFWN SCH160 BORE SA-105N
34-5	9	1	BLIND FLG: 60 - 150# RF SA-105N
34-6	10	1	GASKET: 60 - 150# RF 3 THK SP. WND FLEX FILLER 3045S
34-5	11	4	STUDS: 18 DIA. x 83 LG w (2) HEX NUTS EA. SA-193-B7M/SA-194-2HM
34-6	12	1	ELBOW: 60 NPS x 90° - LR SCH160 BW SMLS SA-234-WPB
34-5	13	2	PIPE: 324 O/D x 9.53 W.T. x 185 LG SMLS SA-106-B
34-6	14	1	PIPE: 60 O/D x 8.71 W.T. x 590 LG SMLS SA-106-B
34-5	15	1	PIPE: 60 O/D x 8.71 W.T. x 715 LG SMLS SA-106-B
34-6	16	4	PIPE: 60 O/D x 8.71 W.T. x 160 LG SMLS SA-106-B
34-5	17	1	NAMEPLATE & MOUNTING BRACKET BY OTHERS
34-6	18	4	PLATE: 6.35 THK x 76 SQUARE SA-516-70N
34-5	19	1	PIPE: 324 O/D x 9.53 W.T. x 165 LG (ERW) SA-53B
34-6	20	1	PIPE: 60 O/D x 8.71 W.T. x 165 LG SMLS SA-106-B
34-5	21	12	NUT: 10# UNC HEAVY HEX SA-194-2H
34-6	22	1	PIPE: 219 O/D x 8.18 W.T. x 120 LG ERW SA-53B

NOTE: THE FOLLOWING PRODUCT FORM SPEC. SHALL BE USED U.N.O.
FLANGES B16.5 1996 ; WROUGHT STEEL B.W. FITTINGS B16.9 1993 ; FORGED FITTINGS SW & SCR'D B16.11 1991
GASKETS B16.20 1993 ; SHORT RAD. ELLS & RETURNS B16.28 1986

<u>MANUFACTURERS SPECS</u> OCP: AQP WPR: LONG & CIRC WELDS: TYPE 1 SERVICE: AMINE LOADINGS PER UG 22(e) CONSIDERED GOVERNS: NO PRODUCTION IMPACT TEST REQ'D: NO IMPACT TESTING: NO - PER UG20(f) AND UCS 66 CAPACITY: 1,800 m ³ WEIGHT EMPTY: 4,400 kg WEIGHT FULL OF WATER: 6,200 kg PAINT SPEC: PNT-1 (FINISH COLOUR BY CLIENT) INSULATION: 38 H/ET CAL SIL W/ALUM. CLADDING		SERIAL NO: 020153"2060" YEAR BUILT: - NIGC P.O#:# M66/03868-501-CL-MO1 ITEM#:# 2060 CODE: ASME SECT. VIII DIV 1, '01, ADDENDA '02 DESIGN PRESS. NOTE: DES. PRESS. IS WAMP. DESIGN TEMPERATURE M.D.M.T. HYDROTEST PRESSURE MATERIAL: HEAD: SA-516-70N SHELL: SA-516-70N RADIOGRAPHY: LONG: FULL UW11(a) INCL. ALL BUTT WELDS CIRC: FULL UW11(a) P.W.H.T. YES MIN TEMP / TIME 593°C / 1 hr 15 min CORR. ALLOWANCE 3.18 mm "SOUR SERVICE" TAG NO: F-2060	
---	--	---	--