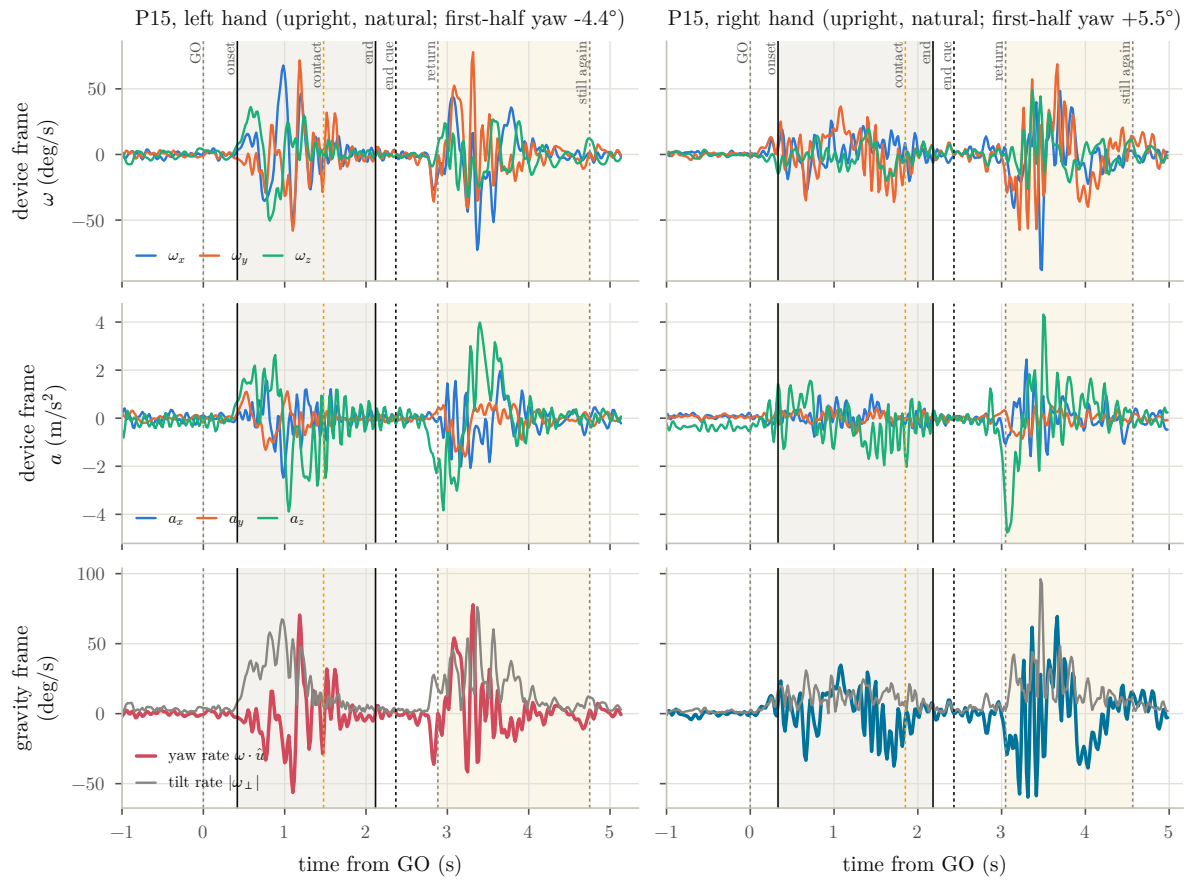

P15, left hand (upright, natural; first-half yaw -4.4°)
P15, right hand (upright, natural; first-half yaw +5.5°)
GO
onset
contact
end
end cue
return
still again
device frame
ω (deg/s)
ω_x
ω_y
ω_z
device frame
a (m/s²)
a_x
a_y
a_z
gravity frame
(deg/s)
yaw rate ω · û
tilt rate |ω_⊥|
time from GO (s)
time from GO (s)