



12 V INPUT – 5.5 x 2.1 mm barrel, centre positive

F1: 5 A PTC. D1: 15 V TVS (clamps hot-plug transients; forward-biased on reversed supply so F1 trips).
Q1: P-FET in the high side, body diode toward the load – drops ~30 mV instead of a Schottky's 0.5 V.
Rated for 12 V in only; Q1 Vgs and D1 standoff both assume a 12 V adapter.
5A PTC 16V

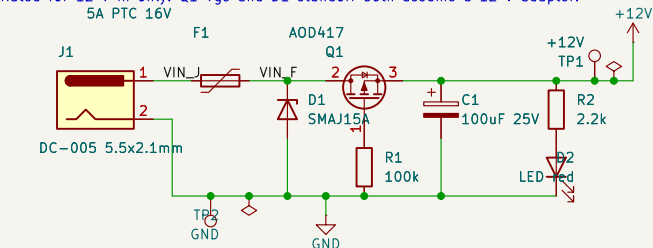


Mounting holes




xmas_hub – 12 V to 4 x 5 V star power hub for the xmas_orn ornaments.
Each arm is its own regulator + fuse: a short on one arm only drops that arm.
Arm cables: 20–22 AWG twin lead, 3.5 x 1.3 mm barrel plugs (centre +) into the ornament's DC-002 jack.
Total output is limited by the 12 V supply: 12 ornaments at ~0.4 A each is ~25 W, i.e. a 12 V / 3 A adapter.


ARM 1 – 5 V / 3 A synchronous buck (TPS54302), PTC 2.6 A hold, screw terminal

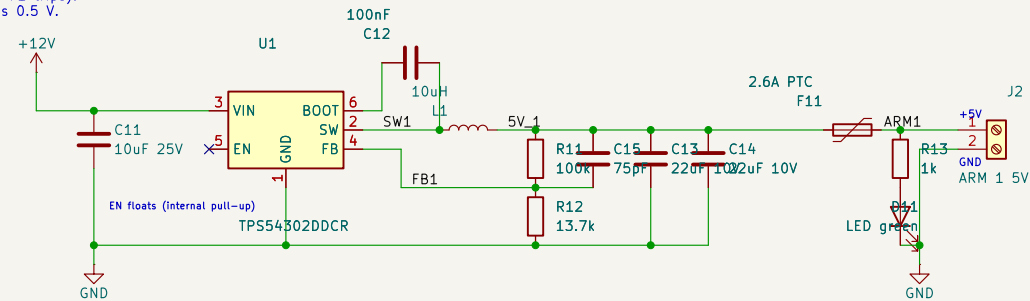

ARM 2 – 5 V / 3 A synchronous buck (TPS54302), PTC 2.6 A hold, screw terminal

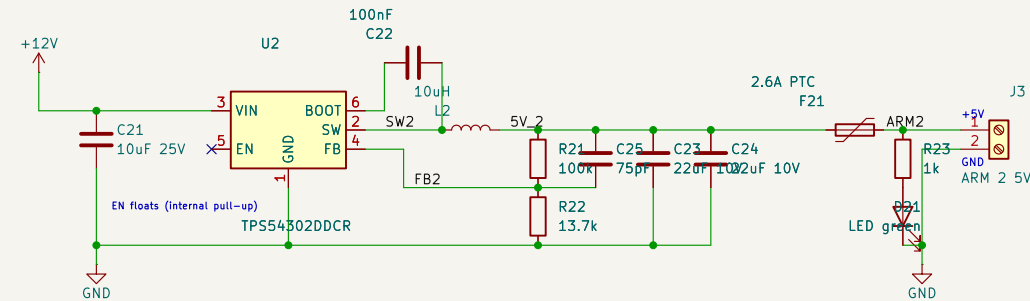

ARM 3 – 5 V / 3 A synchronous buck (TPS54302), PTC 2.6 A hold, screw terminal

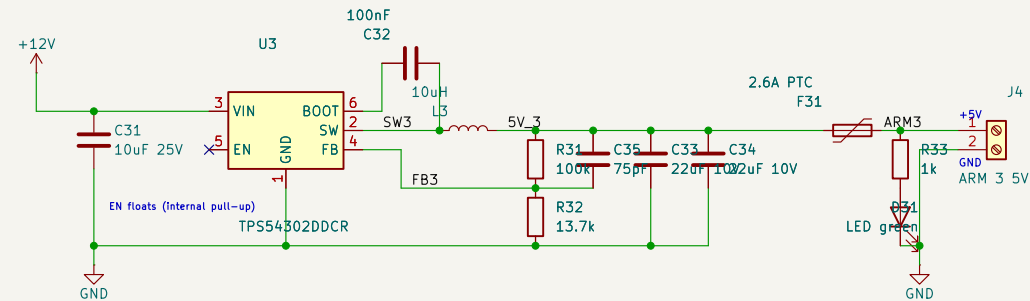

ARM 4 – 5 V / 3 A synchronous buck (TPS54302), PTC 2.6 A hold, screw terminal

