
FAN5V_IN

FAN5V_IN external

FAN_GND


FAN_GND external

J1



JST B2B-XH-A / XHP-2 / SXH-001T-P0.6

J4

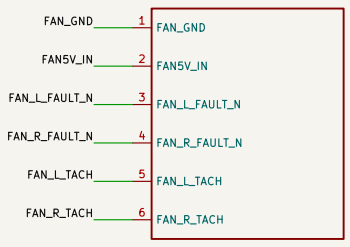


JST B6B-XH-A / XHP-6 / SXH-001T-P0.6

U1




TPS2553DBVR-1

R1



100k 0.1%25ppm TNPW0805100KBEEA

J2




JST B3B-XH-A / XHP-3 / SXH-001T-P0.6

C1



100nF25V C0G5% C1206C104J3GACTU

R2



10k 0.1%25ppm TNPW080510K0BEEA

C3




1uF63V10% WIMA MKS2C041001F00KSSD

C2




100nF25V C0G5% C1206C104J3GACTU

R3



100k 0.1%25ppm TNPW0805100KBEEA

U101

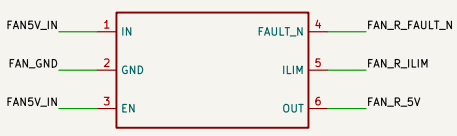


TPS2553DBVR-1

R101



100k 0.1%25ppm TNPW0805100KBEEA

J3




JST B3B-XH-A / XHP-3 / SXH-001T-P0.6

C101



100nF25V C0G5% C1206C104J3GACTU

R102



10k 0.1%25ppm TNPW080510K0BEEA

C103




1uF63V10% WIMA MKS2C041001F00KSSD

C102



100nF25V C0G5% C1206C104J3GACTU

R103



100k 0.1%25ppm TNPW0805100KBEEA

FP01: native protection section only. NEWforce-path supply branch; P03J3 TEST ONLY is prohibited.

Motor/current-limit/startup/ground/thermal bounds unverified. Health/temperature/E28RUN interlock and PCB not implemented.

J4TACH can reach switched5V. Future receiver MUST be5V tolerant with power-off protection. No directMCU connection.

Prototype; complete unit and physical validation unfinished

Sheet: /
File: fan_protection.kicad_sch

Title: Standalone RMX – fan_protection

Size: User	Date:	**Rev: FP01**
KiCad E.D.A. 10.0.7		Id: 1/1