

ITEA2 Project Call 6 11025 2012 – 2015


Work-Package 3: "Tool chain"


Tool chain Development Plan

Description of the tool chain development process

Cecile Braunstein and Jan Peleska

September 2013

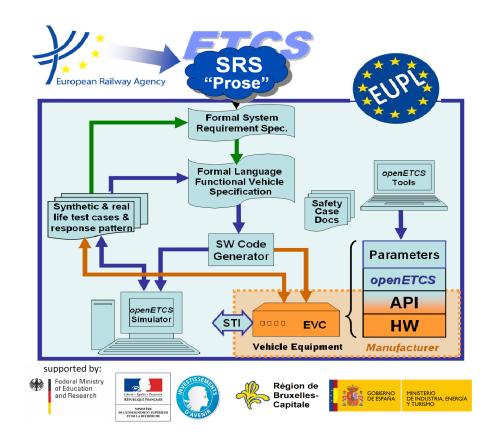





This page is intentionally left blank

Work-Package 3: "Tool chain"

OETCS/WP7/O7.3.1 September 2013

Tool chain Development Plan

Description of the tool chain development process

Cecile Braunstein and Jan Peleska

University Bremen

Software development Plan

This work is licensed under the European Union Public Licence (EUPL v.1.1) and a Creative Commons Attribution-ShareAlike 3.0 Unported License.

© 0 0 BY SA

Prepared for ITEA2 openETCS consortium Europa

Abstract: This document defines the development process of the openETCS tool chain.

Disclaimer: This work is licensed under the European Union Public Licence (EUPL v.1.1) and a Creative Commons Attribution-ShareAlike $3.0-(cc\ by-sa\ 3.0)$

THE WORK IS PROVIDED UNDER THE TERMS OF THIS CREATIVE COMMONS PUBLIC LICENSE ("CCPL" OR "LICENSE"). THE WORK IS PROTECTED BY COPYRIGHT AND/OR OTHER APPLICABLE LAW. ANY USE OF THE WORK OTHER THAN AS AUTHORIZED UNDER THIS LICENSE OR COPYRIGHT LAW IS PROHIBITED.

BY EXERCISING ANY RIGHTS TO THE WORK PROVIDED HERE, YOU ACCEPT AND AGREE TO BE BOUND BY THE TERMS OF THIS LICENSE. TO THE EXTENT THIS LICENSE MAY BE CONSIDERED TO BE A CONTRACT, THE LICENSOR GRANTS YOU THE RIGHTS CONTAINED HERE IN CONSIDERATION OF YOUR ACCEPTANCE OF SUCH TERMS AND CONDITIONS.

http://creativecommons.org/licenses/by-sa/3.0/

http://joinup.ec.europa.eu/software/page/eupl/licence-eupl

OETCS/WP7/07.3.1 iii

Table of Contents

Docu	ment Ir	ntormation	٧
List o	of Terms	S	V
1	Introdu	uction and Motivation	1
2	Refere	ence documents	1
	2.1	Project documents	1
	2.2	Standards documents	2
3	OpenE	ETCS Tool chain Definition Methods	2
4	OpenE	ETCS Tool chain Life Cycle	3
	4.1	OpenETCS Tool chain lifecycle	3
	4.2	OpenETCS Tool chain use of COTS	3
	4.3	OpenETCS Tool chain development	3
5	OpenE	TCS Tool chain Development Environment	5
	5.1	Development environment	5
	5.2	Design Method	5
	5.3	Tool chain Development	5
	5.4	Tool chain verification	6
6	Refere	ences	6
1	WP2 r	equirements	7

Figures and Tables

_: -		
	ıuı	.oc
ıv	ıuı	CO

Figure 1.	Life cycle of the on board software	2
Figure 2.	The OpenETCS tool chain life cycle	4

Tables

Document Information

Document information			
Work Package	WP7		
Deliverable ID or doc. ref.	O7.3.1		
Document title	Tool chain development Plan		
Document version	00.03		
Document authors (org.)	Cécile Braunstein (Uni.Bremen)		
	Jan Peleska (Uni. Bremen)		

Review information		
Last version reviewed		
Main reviewers		

Approbation				
Name Role Date				
Written by	Cécile Braunstein	WP7-T7.3 Sub-Task		
	Jan Peleska	Leaders		
Approved by				

Document evolution				
Version	Date	Author(s)	Justification	
00.01	29.04.2013	C. Braunstein	Document creation	
00.02	26.06.2013	C. Braunstein	Document correction	
00.03	12.02.2014	C. Braunstein	Add Tool chain Lifecycle	

List of Terms

Notation	Description
COTS	Commercial off-the-shelf.
EMF	Eclipse Modeling Framework.
ETCS	European Train Control System.
IDE	integrated development environment.
OBU	On Board Unit.
SIL	System Integrity Level.
SRS	System Requirement Specification.
SSRS	Subsystem Requirement Specification.

1 Introduction and Motivation

The purpose of this document is to set out the development plan for the tool chain design, development and integration process. Following the goals of the openETCS project defined in [4], this document contributes to the **definition of a tool chain for developing on board software** that can be certified by EN50128 requirements (see [9]).

The tool chain provides the tools support and the development process as defined in [1] for the following openETCS activities:

- Formalization of the SSRS
- Design of the semi-formal model of ETCS on board.
- Design of the formal model of part of the ETCS on board.
- Code generation for the OBU
- Documentation production
- Requirements traceability
- Testing on various levels of the development process
- Formal verification and Validation of the produced software

The target software of the tool chain is an OBU based on the SRS Subset-026 [8]. The tool chain should help to assist the design process of *certifiable* SIL4 software (see. [3]) for the OBU.

This document provides the following information:

- Methods for specifying the OpenETCS tool chain section 3
- Life cycle of the OpenETCS tool chain section 4
- Development Environment of the OpenETCS tool chain section 5

2 Reference documents

2.1 Project documents

- [1] Sylvain Baro and Jan Welte. Requirements for openETCS. Requirements D2.6, openETCS, April 2013.
- [2] Marielle Petit-Doche and Matthias Güdemann. openETCS process. Definition D2.3, openETCS, February 2013.
- [3] Merlin Pokam and Norbert Schäfer. Report on CENELEC standards. Requirements D2.2, openETCS, April 2013.
- [4] Project Outline Full Project Proposal Annex openETCS open proofs methodology for the european train control system. Requirements v2.2, openETCS, 2011.
- [5] Marielle Petit-Doche and WP7 Participants. D7.1: Report on the final choice of the primary toolchain. Delivrable OETCS/WP7/D7.1, openETCS, July 2013.

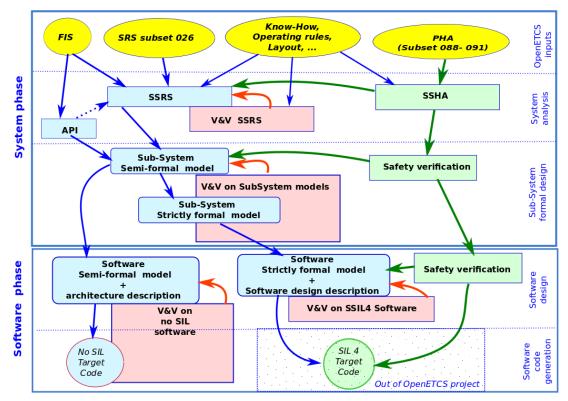


Figure 1. Life cycle of the on board software

- [6] Marielle and all participants of the benchmark Petit-Doche, all participants of VnV, and Safety process. D721:report on all aspects of secondary tooling. Delivrable OETCS/WP7/D7.2, openETCS, January 2014.
- [7] Izakun de la Torre. D1.3.1: Project quality assurance plan. Delivrable D1.3.1, ITEA2 openETCS consortium, 2013.

2.2 Standards documents

- [8] UNISIG. SUBSET-026 system requirements specification. SRS 3.3.0, ERA, March 2012.
- [9] European Standard. Railway applications-Communication, signalling and processing system-Software for railway control and protecton system. CENELEC EN 50128. DIN, October 2011.
- [10] Object Management Group. OMG Systems Modeling Language (OMG SysMLTM). http://www.omgsysml.org, June 2012.

3 OpenETCS Tool chain Definition Methods

The openETCS tool chain is the implementation of the design process of the on board unit (OBU) according to the CENELEC EN 50128. It coordinates the set of tools and methods needed to accomplish this task and it defines the procedure to follow to achieve a on board unit software *certifiable* SIL4.

Following the proposal of the [2] the tool chain implements the life cycle presented figure 1.

Moreover the tool chain should support the activities for producing certifiable software such as:

- Software planning
- · Requirements tracing
- Tool confidences
- Documentation/report production
- Testing
- Verification and validation

The tool chain should also take care to provide the following functioning infrastructure to allow robust distributed development within the defined life cycle.

- a continuous automated build system,
- mechanisms to upgrade tools in the platform,
- mechanisms to add tools to the chain at a later stage (without breaking compatibility),
- modification and change control manager,
- tool chain documentation system.

Finally the OpenETCS tool chain should satisfy the requirements of [1]. Annex A provides a check list of all requirements the tool chain must fulfill.

4 OpenETCS Tool chain Life Cycle

This part defines the development of the tool chain itself. It defines the steps to achieve for the implementation of the tool chain.

4.1 OpenETCS Tool chain lifecycle

The tool chain lifecycle is depicted figure 2.

4.2 OpenETCS Tool chain use of COTS

To design the life cycle defined in the previous section, the tool chain will use the components selected by the WP7. The tool chain will intensively use COTS application to reduce the cost for the development of the OBU.

The decision on the selection of means of description, tools and tool platform are defined in the document [5]. The selection of the secondary tools, e.g. the choice of verification and validation tools are described in [6].

4.3 OpenETCS Tool chain development

The tool chain development will follow the SCRUM process. The following activities will be covered by the tool chain development.

openETCS tool chain architecture specification
 Definition of the tool chain composition (covers by T7.1 [5] and T7.2 [6])

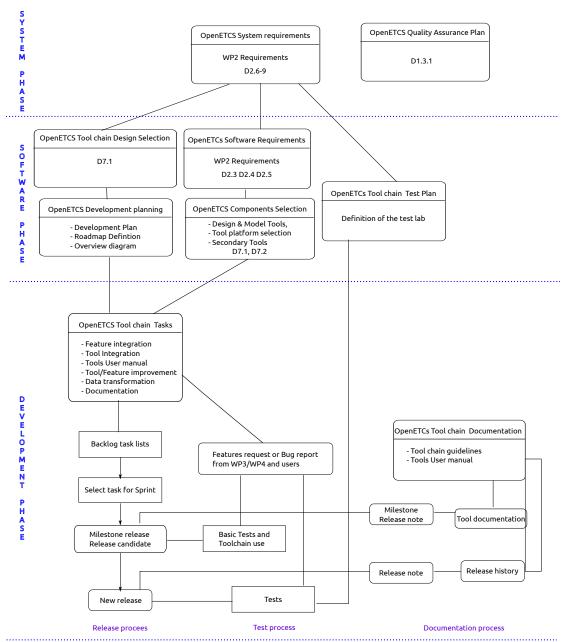


Figure 2. The OpenETCS tool chain life cycle

openETCS tool chain design specification
 Definition of how the tool chain is implemented including the definition of the interoperability mechanism

- Software development Implementation of the tool chain in particular for the need of tool interoperability
- Test and verification plan
 Definition of how to test the tool chain.
- Agile software development guidelines
 Guidelines on how to use the tool chain in an agile development.

The tool chain specification is out of the scope of the document. It has been defined by the WP2, the requirements are listed in Appendix 1.

5 OpenETCS Tool chain Development Environment

The tool chain development will follow the Quality assurance plan [7].

5.1 Development environment

Any GNU (or windows) system running on a PC may be used. IDE such as Eclipse may also be used. The tool chain should be under the GIT version control system [12].

To allow robust distributed development, the environment provides:

- a continuous automated build system,
- an issue tracker,
- a request/extension tracker,
- a backlog
- a documentation system.

The environment will also provides the infrastructure for a SCRUM development. The version management within the tool chain

5.2 Design Method

The tool chain will be designed with SysML ([10]) Block diagram with associated interface specifications following the SysML syntax. The interface will provide the set of artifacts produced or consumed by each tools.

More information may be added to the tool chain model in order to facilitate the design, the certification and the analysis of the openETCS tool chain following the approach [11] or [14].

5.3 Tool chain Development

Following the scrum process, there will be regular releases for the tool chain.

The tool chain is the integration of tools, thus the tool chain development takes care of all the aspects of the tool integration problem (see [13]): (1) Platform integration, (2) Data integration, (3) Presentation integration, (4) Control integration, and (5) Process integration. The point (1) is resolved by the choice of the tool platform. The point (5) is addressed during the design phase of the tool chain.

It has been design that the tool platform hosting the tools will be Eclipse with Eclipse modeling framework (EMF) plug-in. To ensure a good integration, the tool chain development should follow these steps:

- 1. Register tool in Eclipse (3)
- 2. Defining the communication with other tools: method of data exchange (2), Control Integration (4)

Furthermore, each tool should register to the tool version manager. The tool version manager is responsible to keep track of the version and/or changes of tools and provides the list of compatible tools versions.

5.4 Tool chain verification

The validation and verification plan of the tool chain is described in the a separate document [].

6 References

- [11] Oscar Slotosch. Model-based tool qualification: The roadmap of eclipse towards tool qualification. *Springer*, 2012.
- [12] Scott Chacon. Pro Git. Apress, Berkely, CA, USA, 1st edition, 2009.
- [13] AnthonyI. Wasserman. Tool integration in software engineering environments. In Fred Long, editor, *Software Engineering Environments*, volume 467 of *Lecture Notes in Computer Science*, page 137–149. Springer Berlin Heidelberg, 1990.
- [14] Fredrik Asplund, Matthias Biehl, and Frédéric Loiret. Towards the automated qualification of tool chain design. In *Computer Safety, Reliability, and Security*, volume 7613 of *Lecture Notes in Computer Science*, page 392–399. Springer, 2012.

OpenETCS Tool chain Requirements from D2.6

7.7 (R-\ R-\	7 Tools chain 7.1 Usage WP2/D2.6-02-074	The tools chain shall be composed as far as possible of Open Source components licensed under a license compatible with the EUPL license.	Location D7.4/1.3	justification	
(R-\ R-\ R-\	WP2/D2.6-02-074	The tools chain shall be composed as far as possible of Open Source components licensed under a license compatible with the EUPL license.	D7 4/1 3		
R-\ R-\		under a license compatible with the EUPL license.	D7 4/1 3		
R-\ R-\		under a neerise companion with the Lor Linconse.			
R-V		Closed source components may be used, but only if their use is not mandatory in the process,	D7.171.0		₩ P2
R-V	WP2/D2.6-02-074 .01	or if an open source counterpart is provided.			÷ ÷
	VVP2/D2.0-02-074 .01				
	M/D0/D0 C 00 074 00	If a closed source component is used, it has to be displayed how an open source component			
	WP2/D2.6-02-074 .02	has to be designed to replace the closed component later.			<u>_</u>
	WP2/D2.6-02-075	The tools chain shall be portable to common operating systems.			requirements
	WP2/D2.6-02-075.01	The tool chain shall run stable on all main operating systems.	D7.4/1.3.1		
R-\	WP2/D2.6-02-075.02	The tool chain shall run with a good performance on all main operating systems.			=
R-1	WP2/D2.6-02-075.03	he tool chain shall run on at least one major open source operating system.			<u> </u>
	VVI 2/D2:0 02 0/0:00	The tools used in the tool chain shall be able to cooperate, i.e. the outputs of one tool will be			
D I	WP2/D2.6-02-076	suitable to be used as the inputs of another tool.		Part of developer documentation	ወ
	WP2/D2.6-02-076	All possible input and output formats of a tool have to be documented.			
				Part of developer documentation	
K-1	WP2/D2.6-02-076.02	Open data formats shall be used for the tool cooperation.			
		If tools are required for configuration management, they will be considered as part of the tool			
	WP2/D2.6-01-032	chain.			
	WP2/D2.6-02-077	The tools chain shall allow to generate executable code from the model(s).			
7.7	7.2 Information management				
		The tools chain shall be sufficiently robust to allow large software management (at least			
R-\	WP2/D2.6-02-078	covering the onboard part of the SÚBSET-026).			
R-1	WP2/D2.6-02-078.01	It shall allow modularity at any level (proof, models, software).			
	WP2/D2.6-02-078.02	It shall allow the management of documentation.			
	WP2/D2.6-02-078.03	It shall allow distributed software development.			
	WP2/D2.6-02-078.04	It shall allow simultaneous multi user usage.			
- IX-V	VVF 2/D2.0-02-076.04				
ь,	MD2/D2 6 02 070 05	It shall include an issue-tracking system, in order to allow change management and errors/bugs			
	WP2/D2.6-02-078.05	management.			
R-V	WP2/D2.6-02-078.06	It shall allow to document/track the differences between the models and the ERTMS reference.			
		It shall support management of subsequent Subset-026 versions, as well as differences			
R-\	WP2/D2.6-02-078.07	tracking between Subset-026 versions.			
		It shall allow concurrent version development, or be compatible with tools allowing concurrent			
R-\	WP2/D2.6-02-078.08	version development.			
		The version management tools shall use model-based version control instead of text-based			
R-\	WP2/D2.6-02-078.09	version control, when appropriate.			
		In particular it shall allow to track the roles and responsibilities of each participant on a			
R-1	WP2/D2.6-02-078.10	configuration item, at each step of the project lifecycle.			
		In particular, version management shall allow to track version of the safety properties together			-
R-I	WP2/D2.6-02-078.11	with the models.			
	WP2/D2.6-02-079	The tool chain shall allow traceability between:			
	WP2/D2.6-02-079 WP2/D2.6-02-079.01	the documentation/requirements and the models,	+		
	WP2/D2.6-02-079.01 WP2/D2.6-02-079.02		+		
		the documentation/requirements and the tests,	1		
K-V	WP2/D2.6-02-079.03	the models and the tests,	1		
	MIDO/DO 0 00 070 04	each required level of implementation and the lower level (e.g. higher level model vs lower level	1		
	WP2/D2.6-02-079.04	model, lower level model vs source code).	-		
	WP2/D2.6-02-079.05	the documentation/requirements and the models,			
	WP2/D2.6-02-079.06	the documentation/requirements and the safety properties/requirements,			
	WP2/D2.6-02-079.07	the models and the safety properties/requirements,			
R-\	WP2/D2.6-02-079.08	the tests and the safety properties/requirements.			
7.7	7.3 Testing				
	<u> </u>	The SFM shall be executable in debug mode (step-by-step), allowing inspection of states,	1		
ь.	WP2/D2.6-01-036	variables and I/O.	1		
IK-/	D 01 000	The environment shall be emulated by high level construction of the inputs. Justification. "High	+		
		level" means that it will not be necessary to define bitwise the inputs at each cycle. On the	1		
R-\		pever means that it will not be necessary to define bitwise the inputs at each cycle. On the			
	MP2/D2 6-01-037	contrary, some automation will be available to define the behavior of the inputs			
R-\	WP2/D2.6-01-037	contrary, some automation will be available to define the behavior of the inputs.			
R-\	WP2/D2.6-01-037 WP2/D2.6-02-080	contrary, some automation will be available to define the behavior of the inputs. The tool chain shall allow to write, execute and store test cases and use cases for the SFM. Version management will allow to map test cases version to the SFM, the FFM and source			

OpenETCS Tool chain Requirements from D2.6

R-WP2/D2.6-01-038	The tool chain shall allow to generate test cases for the SFM, the FFM and source code from a test model.	
R-WP2/D2.6-02-082	The tool chain shall allow to write, execute and store test sequences combining multiple test cases for the SFM, the FFM and source code.	
7.7.4 Conformance to standard	ds	
R-WP2/D2.6-X-50	Each tool in the tool chain shall be classified among T1, T2 and T3 depending on its usage in the process.	
R-WP2/D2.6-01-042	The tool chain shall conform to EN 50128 requirements, for the corresponding SIL and tool class 6.	
R-WP2/D2.6-01-042.01	For T2 and T3 tools 7, the choice of tools shall be justified, and the justification shall include how the tools failures are covered, avoided or taken into account (ref. to EN 50128 6.7.4.2).	
R-WP2/D2.6-01-042.02	All T2 and T3 tools must be provided with their user manuals.	
R-WP2/D2.6-01-042.03	For all T3 tool, the proof of correctness or the measure taken to guarantee the correctness of the output w.r.t. their specification and the inputs shall be provided	
R-WP2/D2.6-01-042.03.01	for data transformation,	
R-WP2/D2.6-01-042.03.02	for software transformation (e.g. translation, compilation).	