



nice!nano

ADS1220

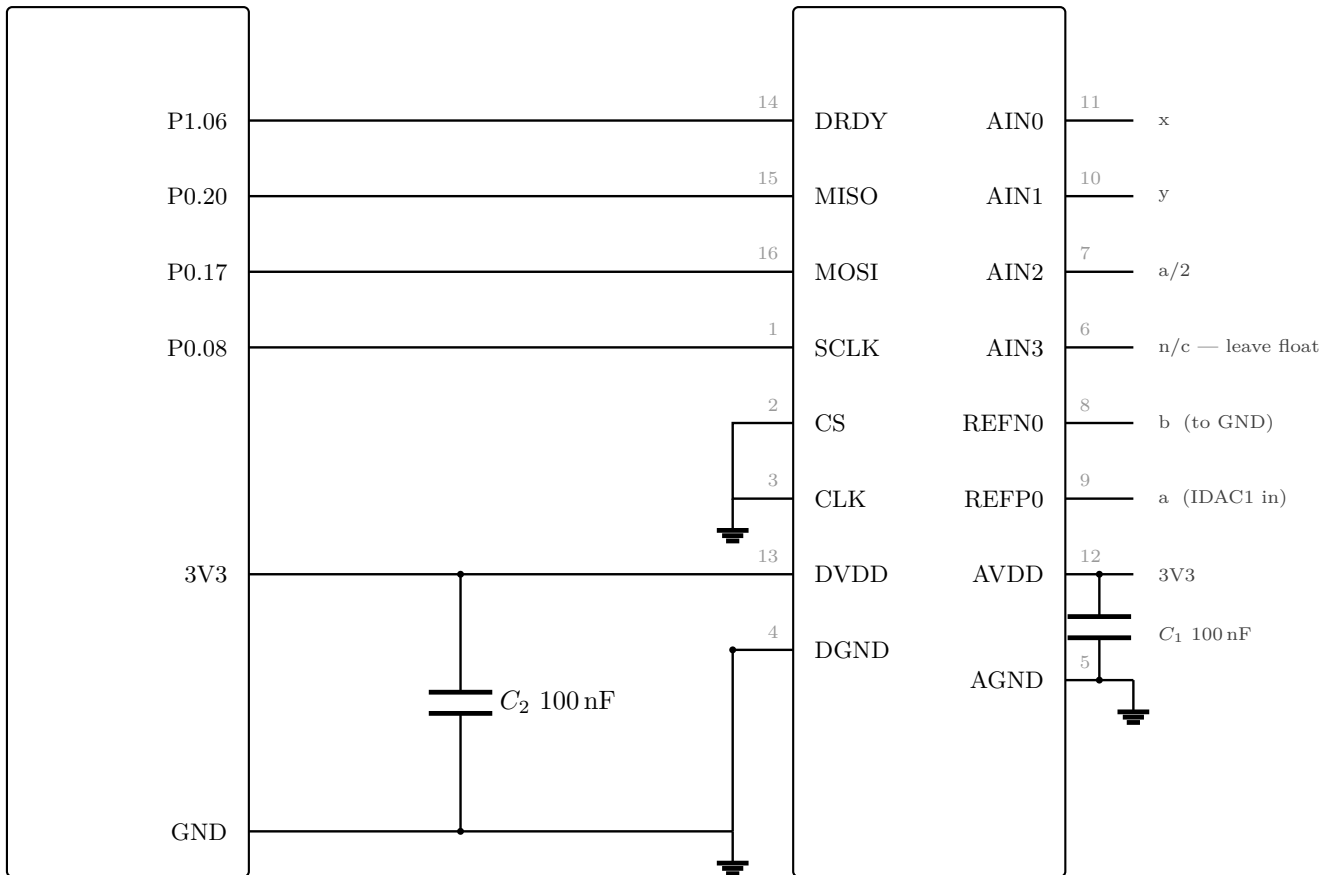

pin order as on the module: left DRDY, MISO, MOSI, SCLK, CS, CLK, DVDD, DGND; right AIN0–AIN3, REFN0, REFP0, AVDD, AGND.
 AGND = AVSS (pin 5); MISO = DOUT (15), MOSI = DIN (16). SPI mode 1; CS and CLK tied to GND (internal oscillator,
 no `cs-gpios` in devicetree); C_1 on AVDD, C_2 on DVDD (100 nF each); sensor-side nets (x, y, a/2, a, b) in figure 2

ADS1220

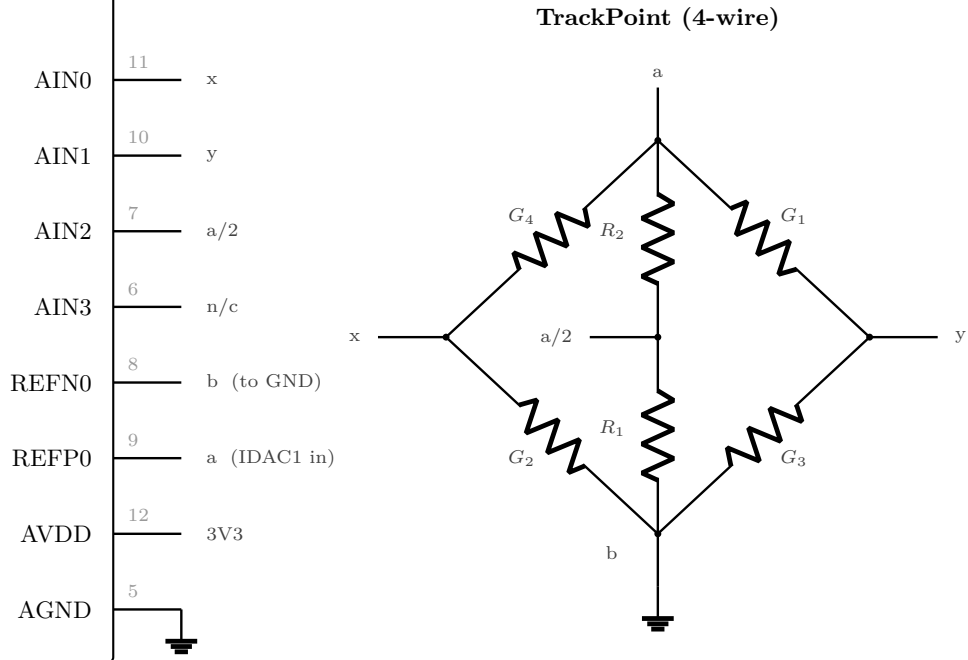

right-side pins in module order; left column (DRDY ... DGND) in figure 1. Symbols join by matching labels. Two half-bridges share a/b; x, y = taps; AIN3 must float. Excitation IDAC1 enters at a, returns via b to GND.

$R_1 = R_2 = 10\text{ k}$ matched $\Rightarrow$ AIN2 = a/2 $\Rightarrow$ differential input ≈ 0 at rest.