


Ex: add \$s2, \$s0, \$s1

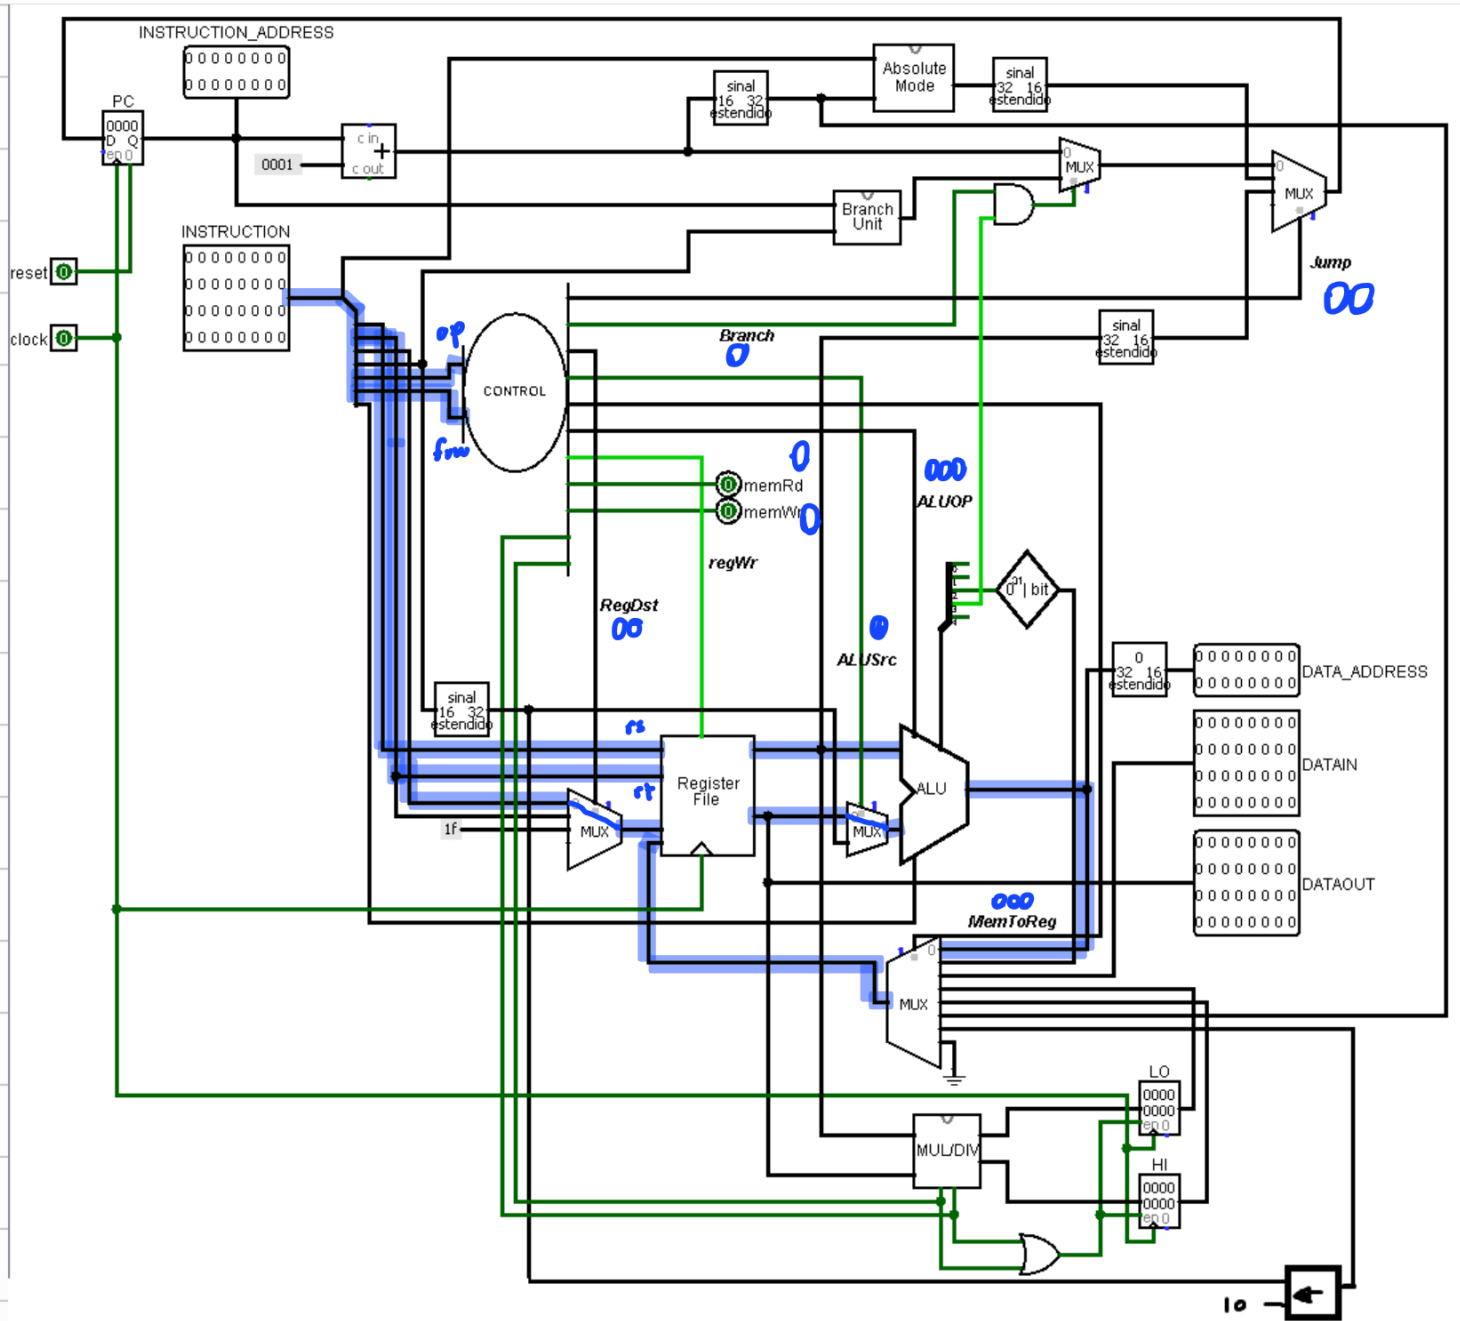

add rd \$s2, ^{rs} \$s0, ^{rt} \$s1
^{op + func}

(R)


^{op} ^{rs} ^{rt} rd ^{sh} ^{func}

op	rs	rt	rd	sh	func
000000	10000	10001	10010	00000	100000
0	2	1	9	0	20

op rt rs cte
addi \$S2,\$S0,42

(I)


6 5 5 16
op rs rt cte
001000 10000 10010 | 0000 | 0000 | 0010 | 1010
2 2 1 2 0 0 2 A

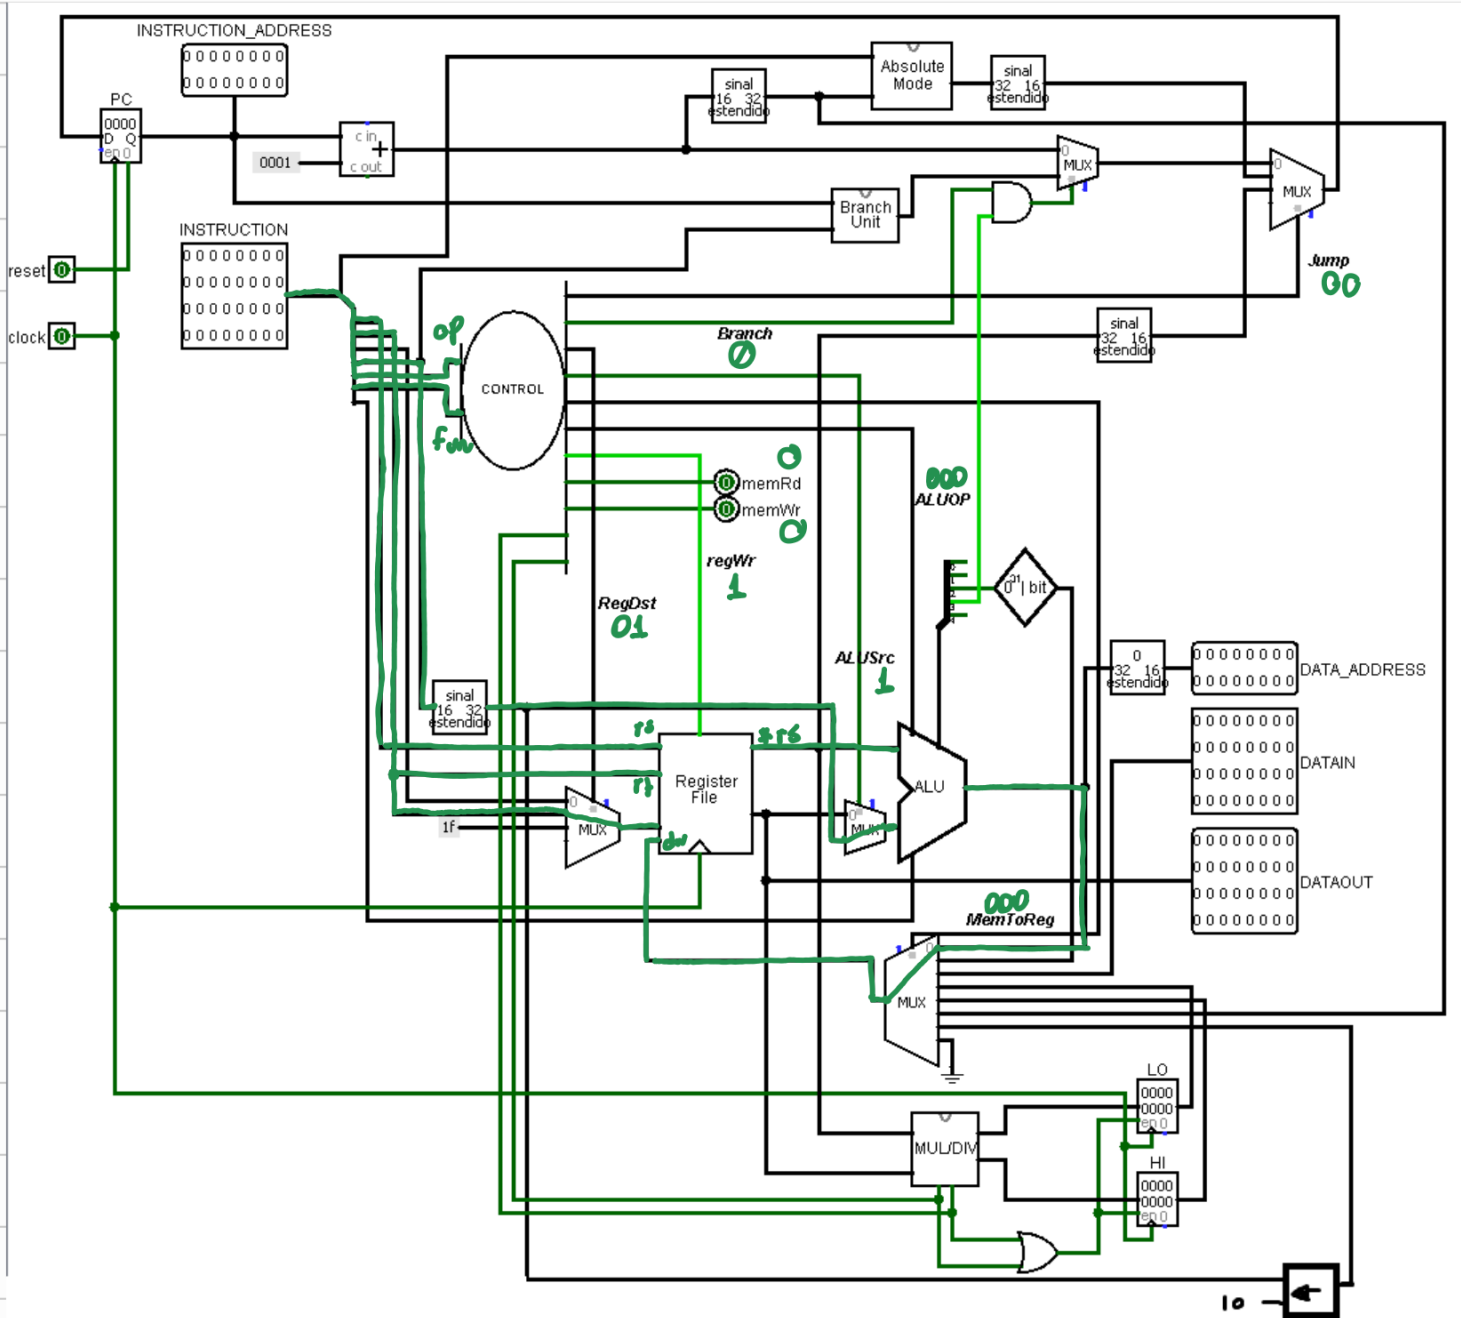

slt rd \$t0, ^{rs} \$s0, ^{rt} \$s1


(R)

000000 10000 10001 01000 00000 101010
 0 2 1 1 4 0 2 A

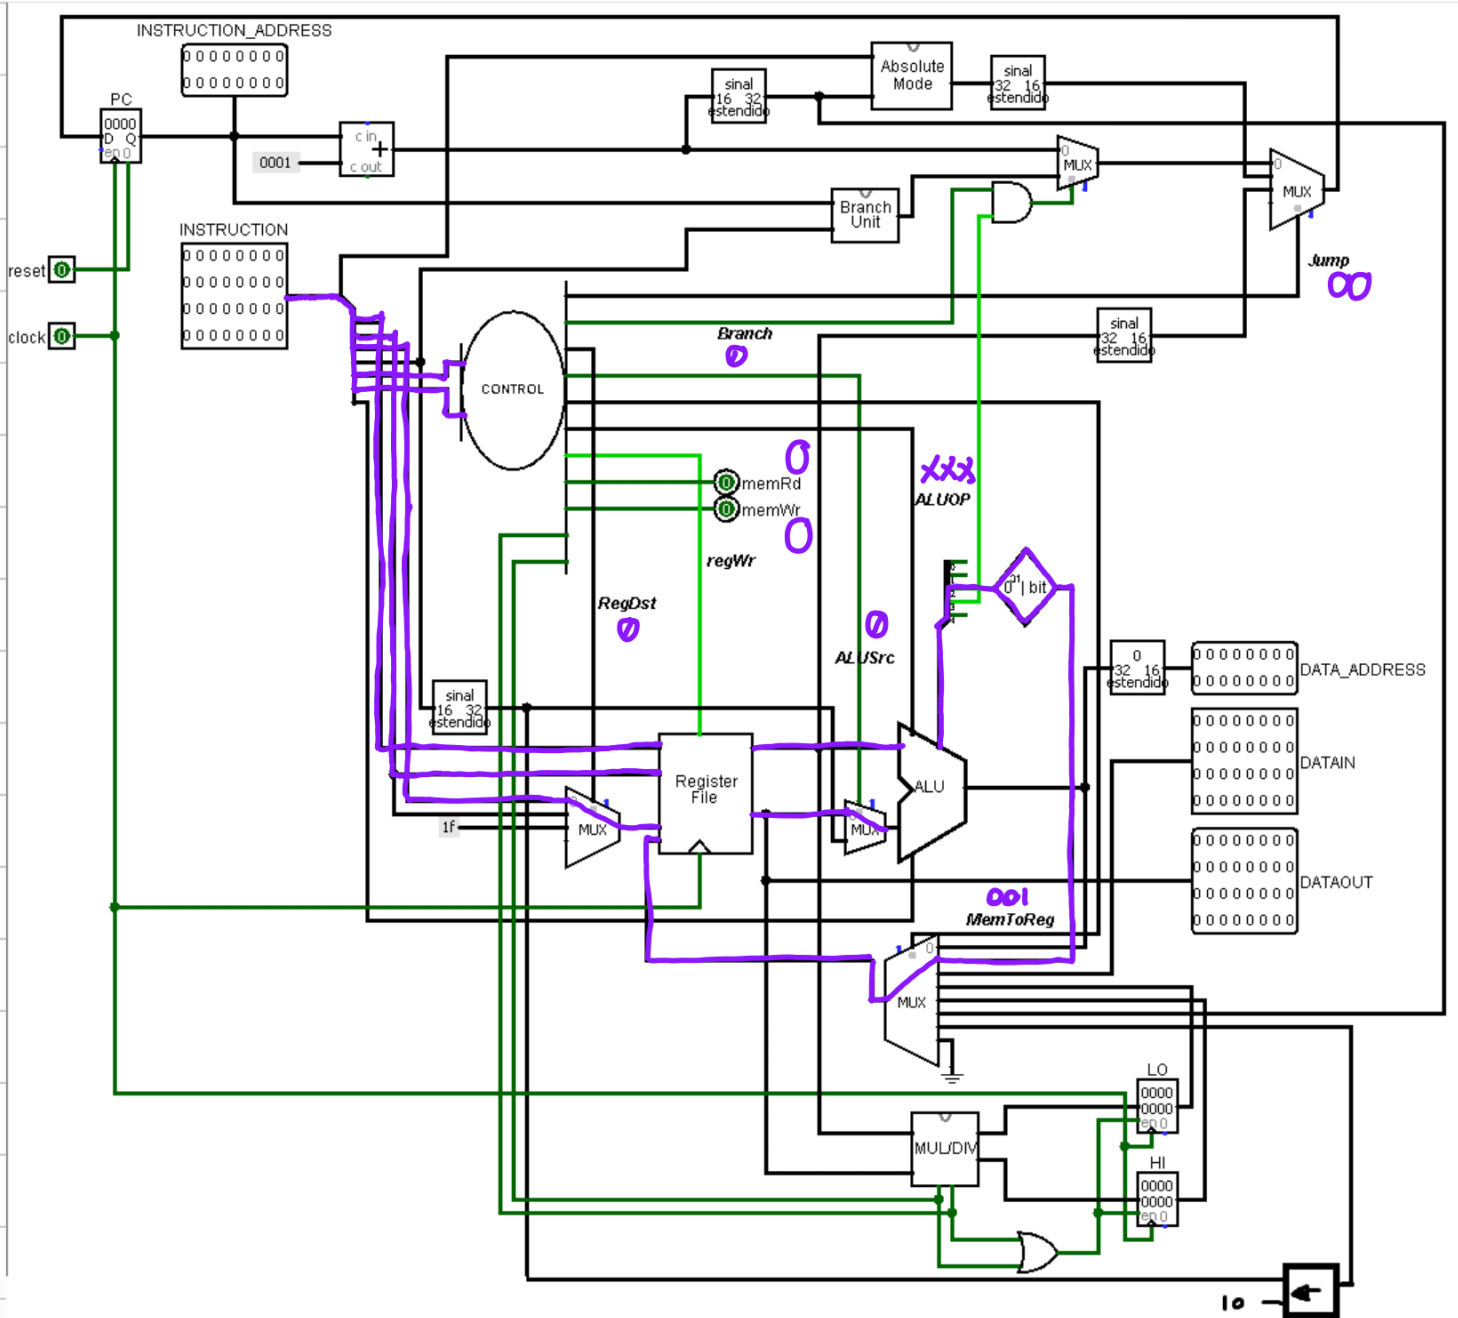


rs rt etc
 beq \$S0, \$S1, Label (Label = 8)

000100 10000 10001 0000 0000 0000 1000
 1 2 1 1 0 0 0 8

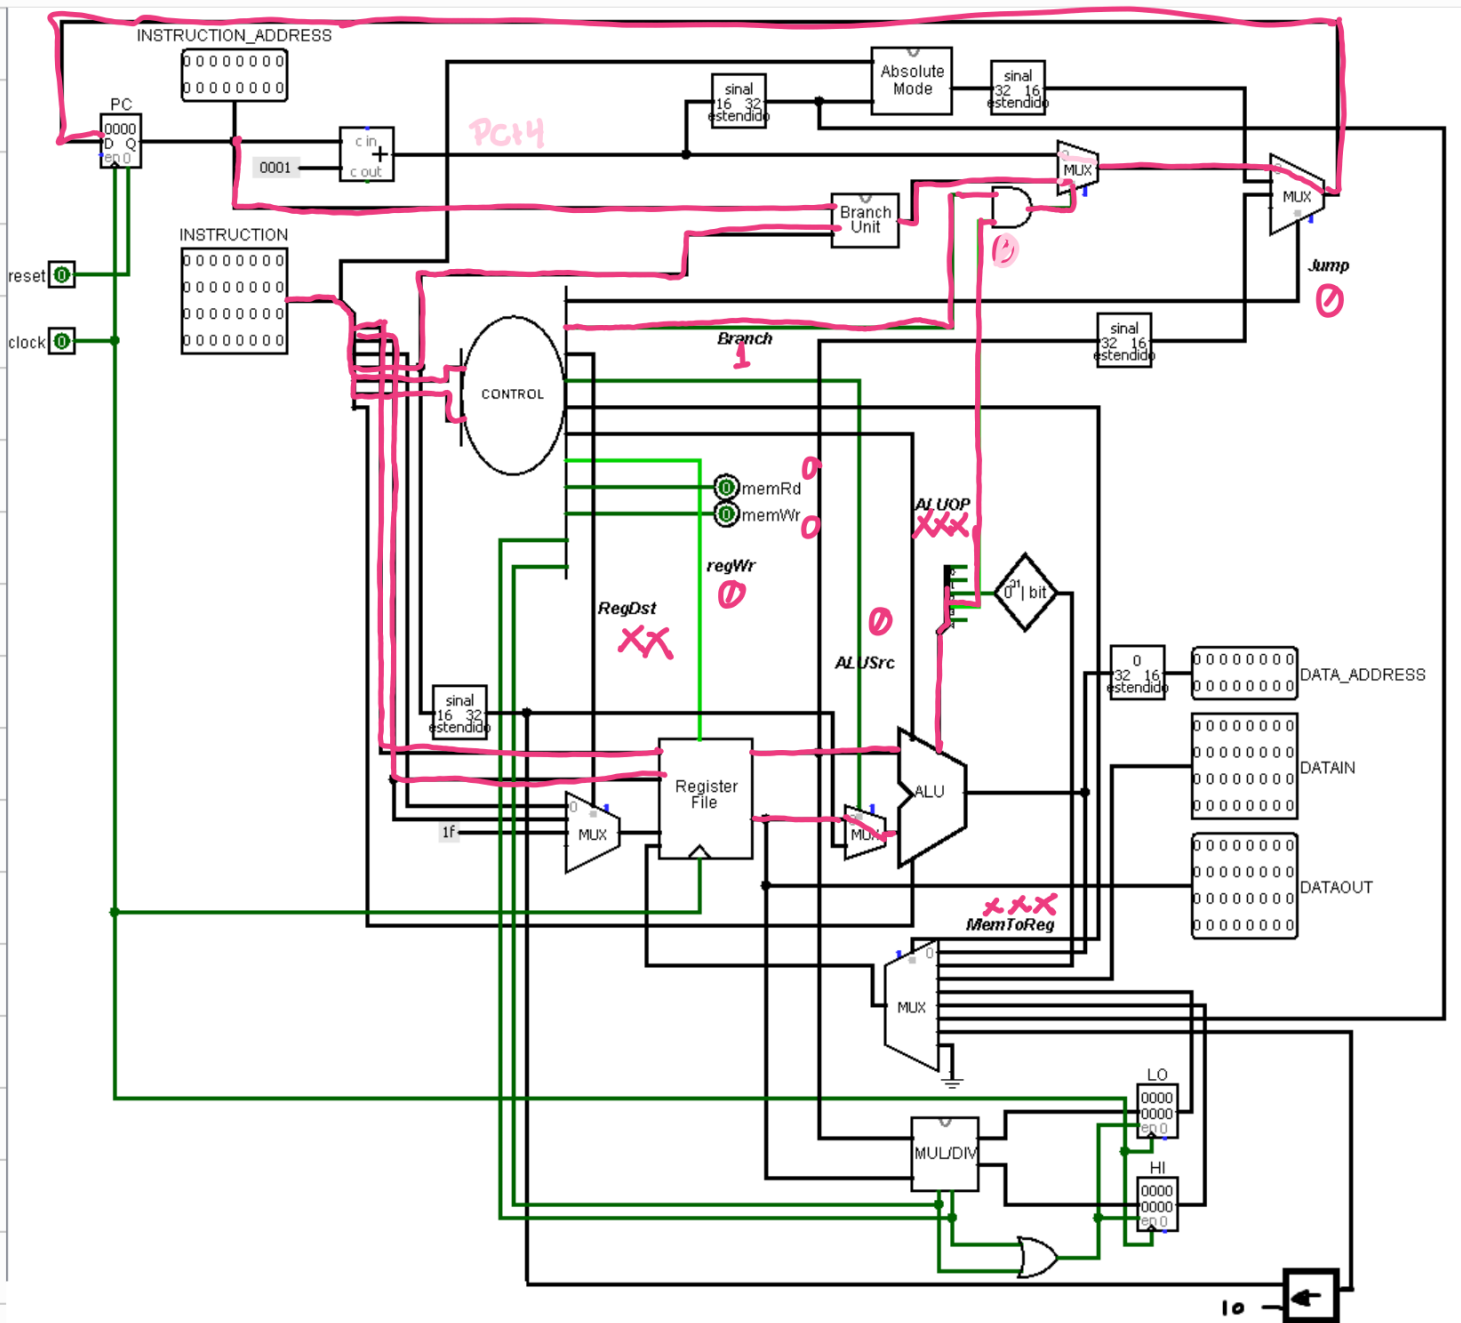


j Label

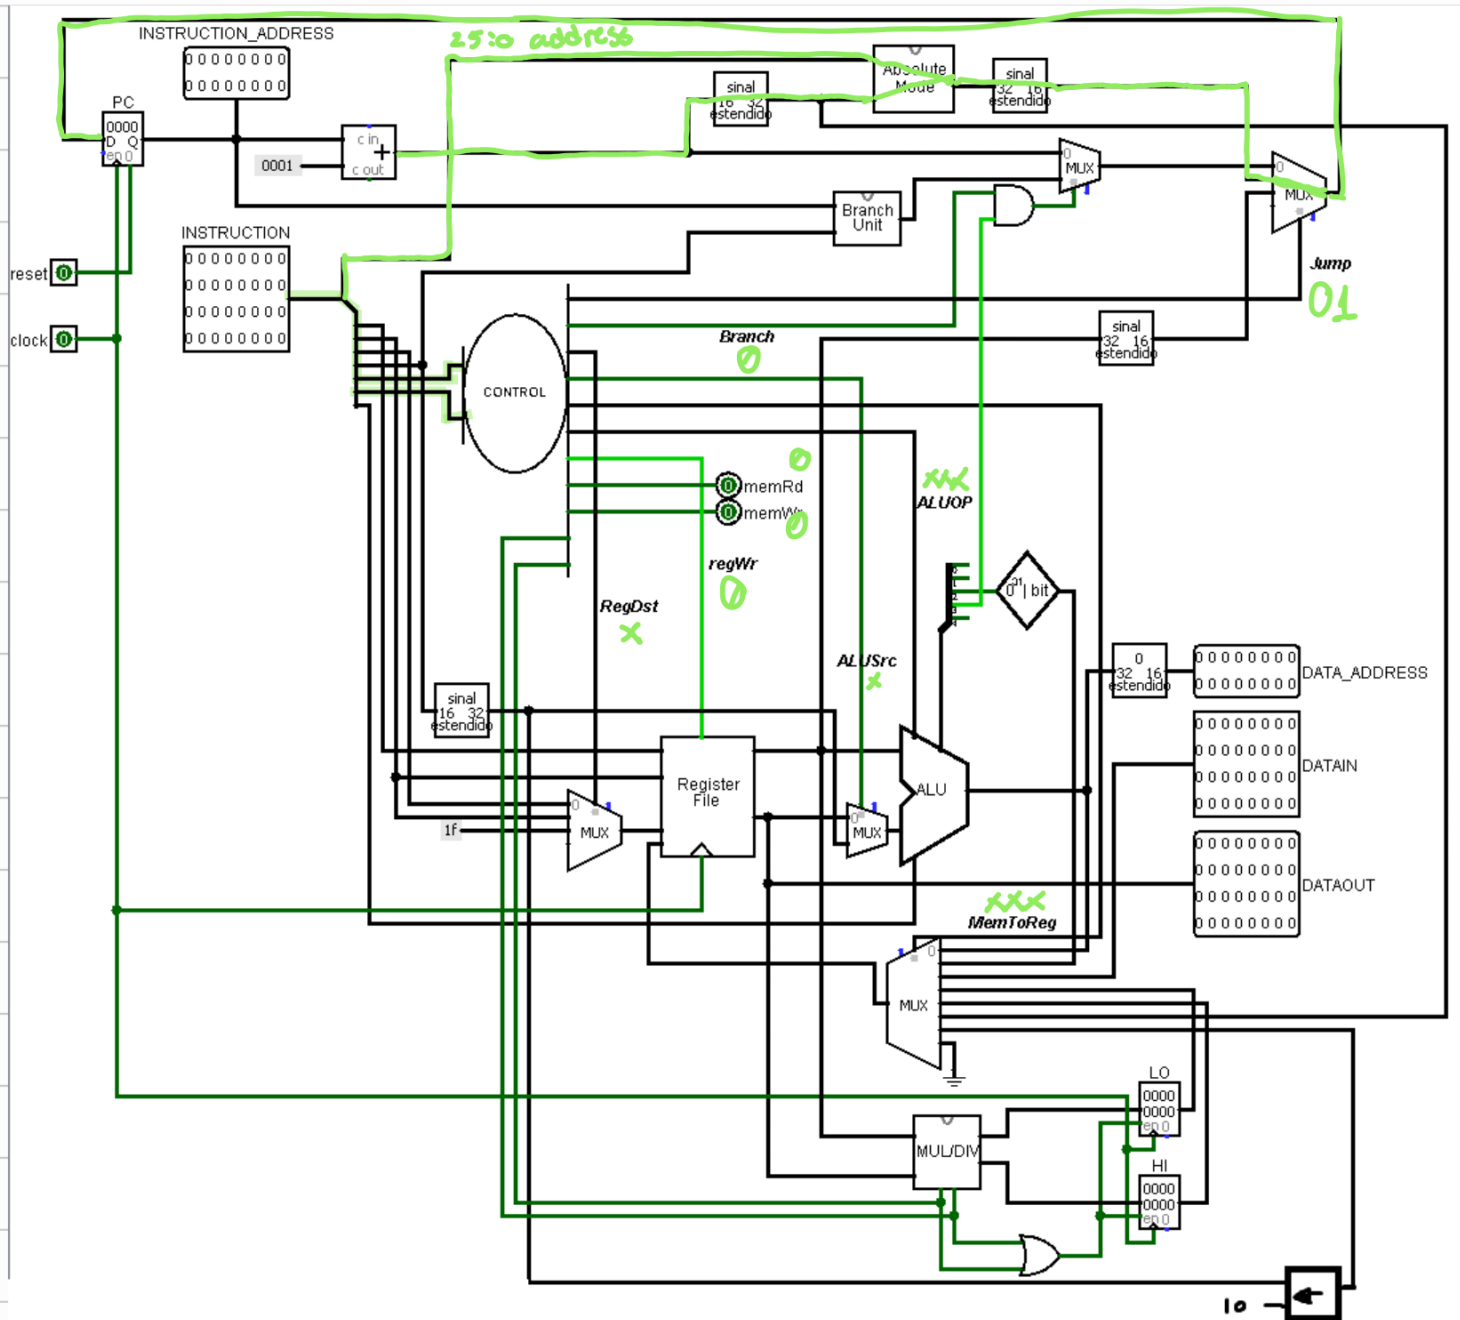

jr \$ra (R) sem: $PC \leftarrow rs$

000000 11111 00000 00000 00000 00000 00000 00000
 0 3 E 0 0 0 0 0 8

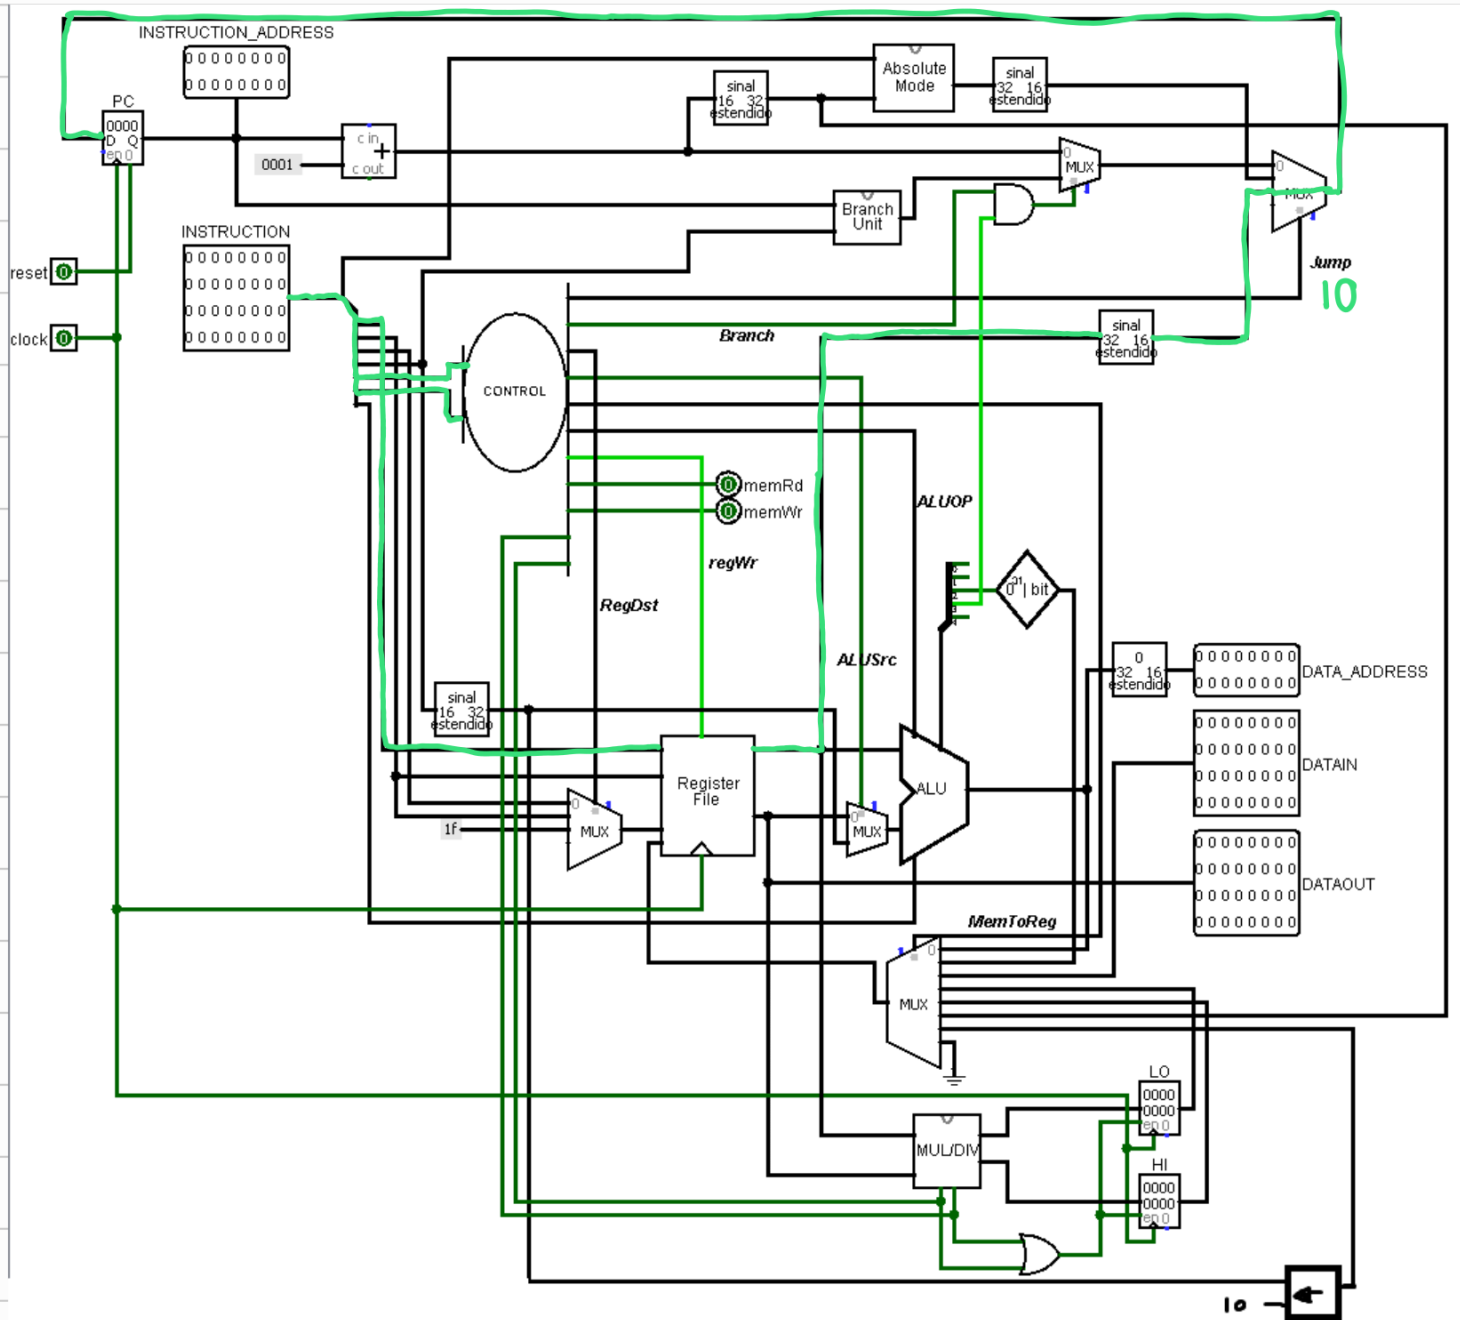

lw \$S0, 16(\$S1)

rt
 $SO \leftarrow MEM[SI + 16]$
cte

