


MusicBrain ADC8 – 8x CV in (slot card, AD7606 serial mode)

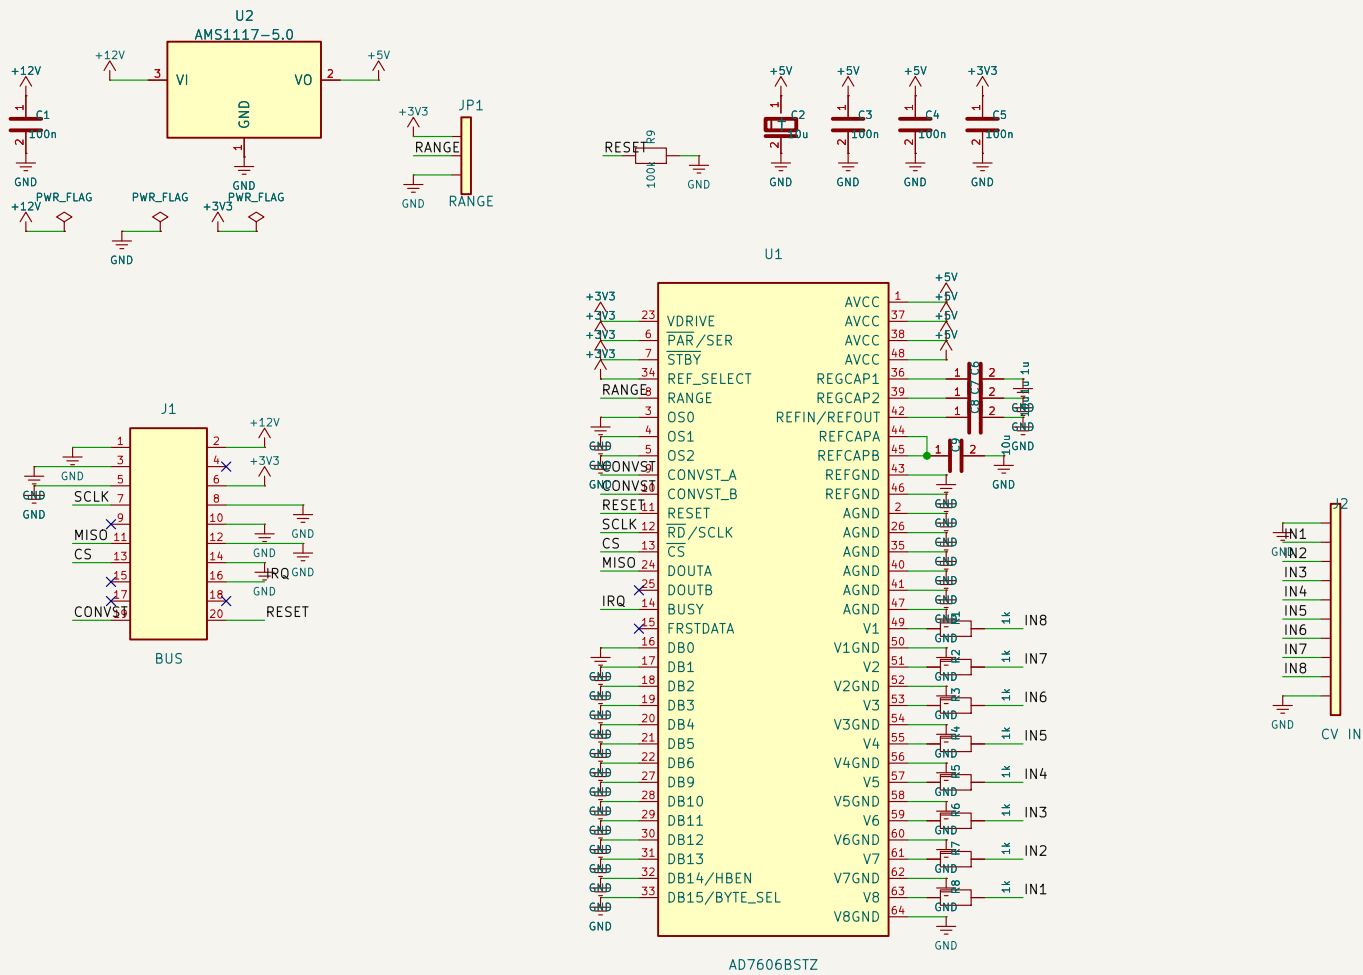

AD7606: 16-bit, 8-ch simultaneous, +/-10V or +/-5V direct in (1 Mohm, clamps)
Serial mode: PAR/SER=high, DB0-6/DB9-15=GND, DOUTA=MISO, DOUTB=nc
Internal 2.5V ref (REF_SELECT=high); REGCAP 2x1u, REFCAP 10u, REFIN 10u
CONVST=SPARE1 (bus-wide sample strobe); RESET=SPARE2 (+100k pulldown)
BUSY -> IRQ (falling edge = data ready); RANGE via JP1: +3V3=+/-10V, GND=+/-5V
AVCC=5V local (AMS1117-5.0), VDRIVE=+3V3 bus
Spec: doc/spi-bus-spec.md

J2: 1=GND, 2-9=IN1..8, 10=GND (zelfde contract als GATE8 J2)
firmware: CONVST-puls -> wacht IRQ (BUSY laag) -> 8x16 bit via MISO