


MusicBrain GATE8 – 8x gate out (slot card)

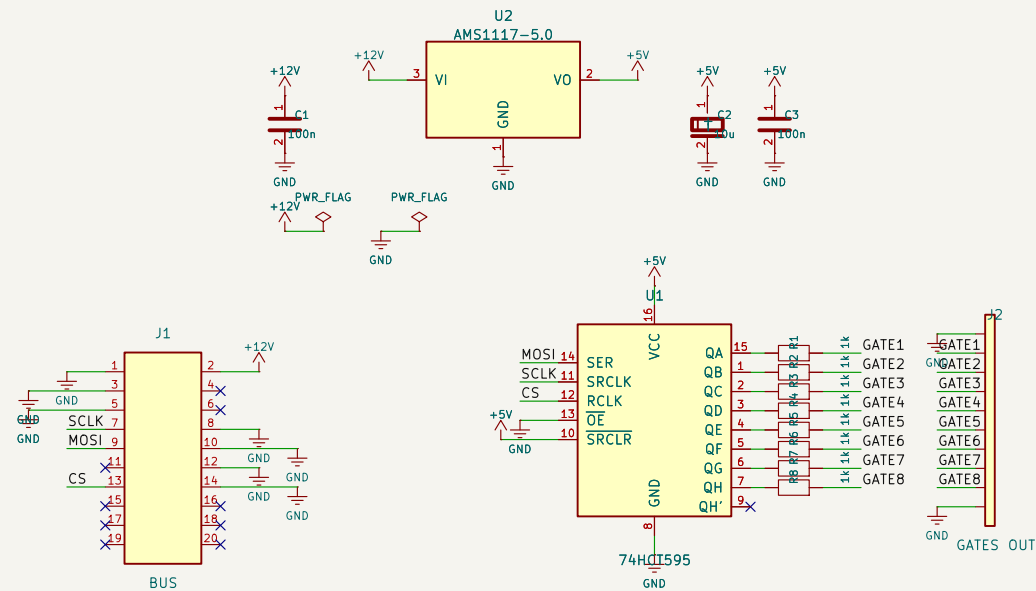

74HCT595 @ +5V = SPI slave, no MCU:
SER=MOSI, SRCLK=SCLK, RCLK=CS
latch on CS rising edge (end of transfer)
SPI mode 0: gates 0-5V via 1k series
Bus pins used: GND, +12V, SCLK, MOSI, CS
MISO/LDAC/I2C/IRQ/SPARE: not connected
Spec: doc/spi-bus-spec.md

J2: 1=GND, 2-9=GATE1..8, 10=GND
firmware: SPI.transfer(bits) in CS window
bit7=QH=GATE8 ... bit0=QA=GATE1

Bus slot card per doc/spi-bus-spec.md
74HCT595 @ 5V; SPI mode 0; latch on CS rising edge
MusicBrain project

Sheet: /
File: musicbrain-gate8.kicad_sch

Title: MusicBrain GATE8 – 8x gate output slot card

Size: A4	Date: 2026-07-07	Rev: 1.0
KiCad E.D.A. 10.0.3		Id: 1/1