


Android and Eduroam

Cite as: Martin Paul Eve, "Android and Eduroam", *eve.gd: Martin Paul Eve*, February 09, 2011, <https://doi.org/10.59348/draft-rmd94>.

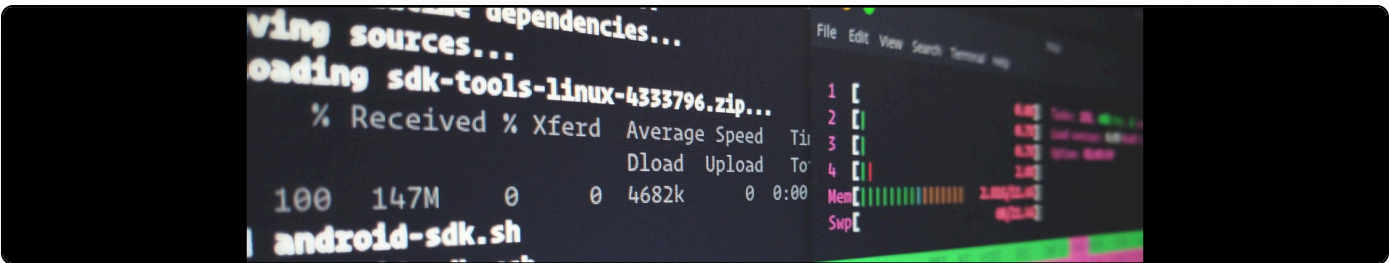

 Eduroam

Image credit: Copyright Eduroam, used here as fair use to indicate the network in question.

It seems there's a few bugs in various Android variants that prevent a valid routing table being setup when connecting to an institutional eduroam network. The problem, which I have seen people reporting on XDA, occurs when you can get onto the wifi network, but still no resources are available.

You'll need a rooted device to fix this, and it's a clumsy workaround, but here's what I did on the University of Sussex campus.

1.) Dump a valid routing table from a device that works:

```
sudo route
Kernel IP routing table
Destination      Gateway          Genmask         Flags Metric Ref    Use Iface
10.0.8.5         *               255.255.255.255 UH      0      0      0 wlan0
link-local       *               255.255.0.0    U       1000   0      0 wlan0
default          10.0.8.5        0.0.0.0         UG      0      0      0 wlan0
```

2.) Shell into your android device and check the routing table there:

```
route
Kernel IP routing table
Destination      Gateway          Genmask          Flags Metric Ref    Use Iface
```

What a surprise, it's empty.

3.) Add a route to your gateway and then a default route using the gateway

```
route add 10.0.8.5 dev eth0
route add default gw 10.0.8.5 dev eth0
route
Kernel IP routing table
Destination      Gateway          Genmask          Flags Metric Ref    Use Iface
10.0.8.5         *                255.255.255.255  UH      0      0      0 eth0
default          10.0.8.5         0.0.0.0          UG      0      0      0 eth0
```

Hurrah! You are now connected. It's probably worth putting this in a script which you can automatically run with Script Kitty or the such like.

4.) Test connectivity

```
ping google.com
PING google.com (74.125.230.116) 56(84) bytes of data.
64 bytes from 74.125.230.116: icmp_seq=1 ttl=53 time=14.8 ms
```