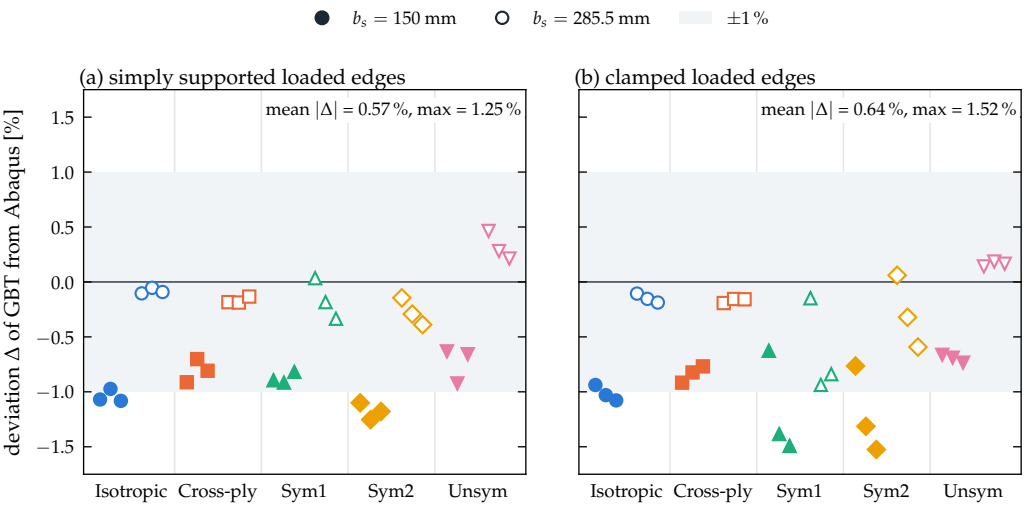

b_s = 150 mm
b_s = 285.5 mm
±1 %
(a) simply supported loaded edges
mean |Δ| = 0.57 %, max = 1.25 %
(b) clamped loaded edges
mean |Δ| = 0.64 %, max = 1.52 %
deviation Δ of GBT from Abaqus [%]
1.5
1.0
0.5
0.0
−0.5
−1.0
−1.5
Isotropic
Cross-ply
Sym1
Sym2
Unsym