

CE5850-48T4S2Q-HI-B Datasheet

Get a Quote



Overview

CE5850-48T4S2Q-HI-B is one of the Huawei CE5850-48T4S2Q-HI switches. Huawei CE5850-48T4S2Q-HI provides 48 * GE line-speed ports plus 4 * 10 GE and 2 * 40G upstream ports for stacking up to 16 switches. 10 GE and 40G ports enable creation of a non-blocking stack that can extend across geographical distances between data centers. Using the Huawei VRP8 software platform, CE5800 switches support Transparent Interconnection of Lots of Links (TRILL) and have a high stacking capability (up to 16-member switches in a stack system). In addition, the airflow direction (front-to-back or back-to-front) can be changed. CE5800 switches can work with CE12800 switches to build an elastic, virtualized, high-quality fabric that meets the requirements of cloud-computing data centers. CE5800 switches provide high-density GE access to help enterprises build a scalable data center network platform for cloud computing. They can also be used as aggregation or access switches for enterprise campus networks.

Quick Specs

Figure 1 shows the appearance of CE5850-48T4S2Q-HI-B.

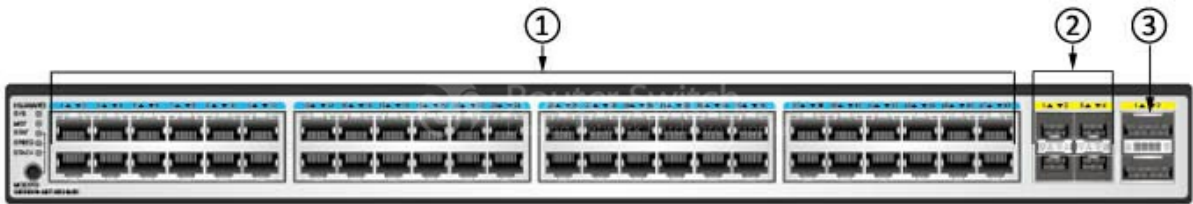


Table 1 shows the Quick Specs.

Product Code	CE5850-48T4S2Q-HI-B
Part Number	02350EYD
Software Version	V100R003C00 and later
Base-T Ports	48
SFP+ Ports	4
QSFP+ Ports	2
Switching Capacity	336 Gbit/s
Forwarding Rate	252 Mpps
Rated voltage range (with power module)	100 V AC to 240 V AC, 50/60 Hz -48 V DC to -60 V DC
Maximum power consumption	131W
Airflow	Front-to-back or back-to-front
Dimensions (W x D x H)	442 mm x 420 mm x 43.6 mm
Weight (fully loaded)	8.8 kg (19.4 lb)

Product Details

Figure 2 shows the CE5850-48T4S2Q-HI-B rear view (port side).



Note:

(1)	Forty-eight 10/100/1000BASE-T Ethernet electrical ports
(2)	Four 10GE SFP+ Ethernet optical ports
(3)	Two 40GE QSFP+ Ethernet optical ports

Figure 3 shows the CE5850-48T4S2Q-HI-B front view (power supply side).



Note:

(1)	Power supply slot 1
(2)	Fan slot 1
(3)	Console port
(4)	ETH management port
(5)	Bar code label
(6)	USB port
(7)	Fan slot 2
(8)	Power supply slot 2

The Modules

Table 2 shows the recommended elements for the CE5850-48T4S2Q-HI-B.

Model	Description
GE-SFP Optical Transceiver	
eSFP-GE-SX-MM850	Optical Transceiver, eSFP, GE, Multi-mode Module(850nm, 0.55km, LC)
SFP-GE-LX-SM1310	Optical Transceiver, eSFP, GE, Single-mode Module(1310nm, 10km, LC)
S-SFP-GE-LH40-SM1310	Optical Transceiver, eSFP, GE, Single-mode Module(1310nm, 40km, LC)
S-SFP-GE-LH40-SM1550	Optical Transceiver, eSFP, GE, Single-mode Module(1550nm, 40km, LC)
10G-SFP+ Optical Transceiver	
SFP-10G-USR	10GBase-USR Optical Transceiver, SFP+, 10G, Multi-mode Module(850nm, 0.1km, LC)
OMXD30000	Optical Transceiver, SFP+, 10G, Multi-mode Module(850nm, 0.3km, LC)
OSX010000	Optical Transceiver, SFP+, 10G, Single-mode Module(1310nm, 10km, LC)
GE Copper Transceiver	
SFP-1000BaseT	Electrical Transceiver,SFP,GE,Electrical Interface Module(100m,RJ45)
FAN-40EA	
FAN-40EA-F	FAN-40EA-F fan module (front-to-back, air intake on panel)
FAN-40EA-B	FAN-40EA-B fan module (back-to-front, air exhaust on panel)

Compare to Similar Items

Table 3 shows the comparison of CE5850-48T4S2Q-HI-B and CE5850-48T4S2Q-EI-B.

Product Code	CE5850-48T4S2Q-HI-B	CE5850-48T4S2Q-EI-B
Part Number	02350EYD	02350EXY
Software Version	V100R003C00 and later	V100R001C00 and later
Base-T Ports	48	48
SFP+ Ports	4	4
QSFP+ Ports	2	2
Switching Capacity	336 Gbit/s	336 Gbit/s
Forwarding Rate	252 Mpps	252 Mpps
Maximum power consumption	131W	131W

Get more information

Do you have any question about the CE5850-48T4S2Q-HI-B?

Contact us now via [Live Chat](#) or sales@router-switch.com.

Specification

CE5850-48T4S2Q-HI-B Specification	
Base-T Ports	48

SFP+ Ports	4
QSFP+ Ports	2
Switching Capacity	336 Gbit/s
Forwarding Rates	252 Mpps
Airflow Design	Front-to-back or back-to-front
Device Virtualization	iStack
	Super Virtual Fabric (SVF)
Network Virtualization	M-LAG
	TRILL (CE5855 & CE5850)
VM Awareness	Agile Controller
SDN	Open Programmability System (OPS)
Traffic Analysis	NetStream
	sFlow
VLAN	Adding access, trunk, and hybrid interfaces to VLANs
	Default VLAN
	QinQ
	MUX VLAN
	GVRP
ACL	ingress: 2.25k egress: 1k
MAC Address Table	maximum: 128k
	Dynamic learning and aging of MAC addresses
	Static, dynamic, and black hole MAC address entries
	Packet filtering based on source MAC addresses
	MAC address limiting based on ports and VLANs
ARP (maximum)	16k
IPv4 FIB (maximum)	16k
IP Routing	IPv4 routing protocols, such as RIP, OSPF, BGP, and IS-IS
	IPv6 routing protocols, such as RIPng, OSPFv3, IS-ISv6, and BGP4+ (not supported by CE5855)
IPv6 FIB (maximum)	8k
IPv6	IPv6 Neighbor Discovery (ND) (not supported by CE5855)
	Path MTU Discovery (PMTU) (not supported by CE5855)
	TCP6, ping IPv6, tracer IPv6, socket IPv6, UDP6, and Raw IP6
Multicast FIB (maximum)	4k
	IGMP, PIM-SM, PIM-DM, MSDP, and MBGP

Multicast	IGMP snooping
	IGMP proxy
	Fast leave of multicast member interfaces
	Multicast traffic suppression
	Multicast VLAN
Reliability	LACP
	STP, RSTP, VBST, MSTP
	BPDU protection, root protection, and loop protection
	Smart Link and multi-instance
	DLDP
	ERPS (G.8032)
	VRRP, VRRP load balancing, and BFD for VRRP
	BFD for BGP/IS-IS/OSPF/Static route
QoS	Traffic classification based on Layer 2 headers, Layer 3 protocols, Layer 4 protocols, and 802.1p priority
	Actions of ACL, CAR, re-marking, and scheduling
	Queue scheduling algorithms, including PQ, WRR, DRR, PQ + WRR, and PQ + DRR
	Congestion avoidance mechanisms, including WRED and tail drop
	Traffic shaping
Configuration and Maintenance	Console, Telnet, and SSH terminals
	Network management protocols, such as SNMPv1/v2c/v3
	File upload and download through FTP and TFTP
	BootROM upgrade and remote upgrade
	802.3az Energy Efficient Ethernet (EEE)
	Hot patches
	User operation logs
	Zero-Touch Provisioning (ZTP)
Security and Management	802.1x authentication
	Command line authority control based on user levels, preventing unauthorized users from using commands
	DoS, ARP, and ICMP attack defenses
	Port isolation, port security, and sticky MAC
	Binding of the IP address, MAC address, interface number, and VLAN ID
	Authentication methods, including AAA, RADIUS, and HWTACACS
	Remote Network Monitoring (RMON)
Dimensions (W x D x H)	442 mm x 420 mm x 43.6 mm
Weight (fully loaded)	8.8 kg (19.4 lb)

Environmental Parameters	Operating temperature: 0°C to 40°C (32°F to 104°F) (0m to 1,800m)
	Storage temperature: -40°C to 70°C (-40°F to 158°F)
	Relative humidity: 5% to 95%, non-condensing
Operating Voltage	AC: 90V to 264V
	DC: -38.4V to -72V
Maximum Power Consumption	131W

Want to Buy

[Order Now](#)

[Get a Quote](#)

Why Router-switch.com

As a leading network hardware supplier, Router-switch.com focuses on original new ICT equipment of [Cisco](#), [Huawei](#), [HPE](#), [Dell](#), [Hikvision](#), [Juniper](#), [Fortinet](#), etc.



200+
Countries we Sold



18,000+
Customers Trusted



\$20,000,000
Inventory Available



50%-98%
Off Global List Price



100%
Safe Online Shopping

Contact Us

- Tel: +1-626-655-0998 (USA) +852-3050-1066 / +852-3174-6166
- Fax: +852-3050-1066 (Hong Kong)
- Email: sales@router-switch.com