


N R AGARWAL INDUSTRIES LIMITED
BOARD MACHINE – NR -- Unit -1
SPECIFICATION SHEETS

DATE: 27th May 2024

PRODUCT: LEGEND GREY BACK

Substance (GSM) Tappi T-410, om02, ISO-536	CALIPER (μ) Tappi T-411, om 97, ISO 534	BULK (cc/gm.)	Taber Stiffness (T489 om 99) gm-cm		
230	267	1.16	40	18	27
250	290	1.16	55	25	37
260	307	1.18	65	28	43
270	319	1.18	70	30	46
285	336	1.18	85	38	57
296	352	1.19	100	43	66
300	360	1.20	105	46	69
320	384	1.20	120	52	79
330	396	1.20	130	56	85
340	408	1.20	135	58	88
350	420	1.20	150	65	99
360	432	1.20	160	70	106
370	448	1.21	175	75	115
380	460	1.21	190	80	123
400	484	1.21	210	90	137
410	496	1.21	225	97	148
420	508	1.21	235	105	157
450	545	1.21	275	120	182
500	605	1.21	325	140	213
Tol. ±3%	±5%	±5%	±10% Geometric mean value		
PARAMETER	UNIT	TEST PROCEDURE		VALUE	
PLYBOND	(J/M²)	Tappi T-569 pm - 00		> 130	
ROUGHNESS (PPS)	Micron (μ)	TAPPI T-555 ,om-99/ISO 8791-4		3.0 Max.	
Gloss at 75 °	(%)	Tappi T-480 om-92/ISO 8254-1		40 Min	
IGT DRY PICK(MV)	(m/s)	TAPPI T-514/ISO 3782 & 3783		0.7 Min.	
ISO BRIGHTNESS	(%)	TAPPI T-452 om 98/ISO 2470		76 (Min)	
COBB-60 TS	g/m²	TAPPI T-441 om 98/ISO 535:2014		50 (Max)	
BS	g/m²	TAPPI T-441 om 98/ISO 535:2014		60 (Max)	
Moisture					
230-300 GSM	(%)	TAPPI T-412 om 2/ISO 287:2017		6.0 - 7.0	
301-500 GSM	(%)	TAPPI T-412 om 2/ISO 287:2017		7.0 - 8.0	

BOARD CONSTRUCTION:

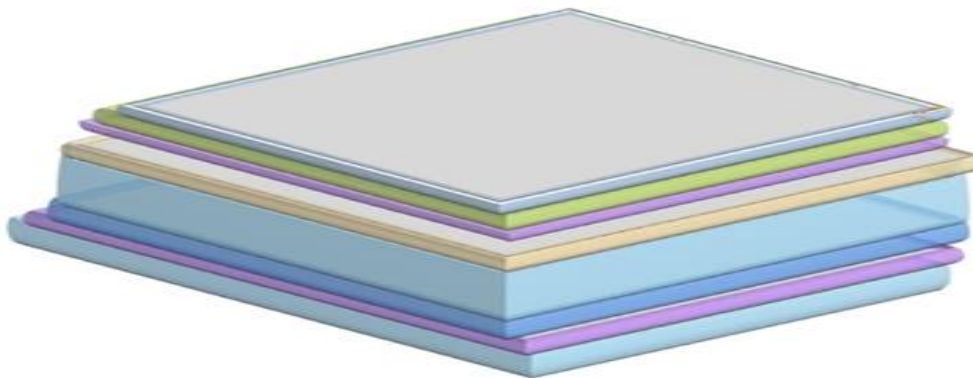

Double Coated
Size Starch
Top Layer
Under Top Layer
Filler Layer

Bottom Layer
Size Starch
Back Coat Starch

- All properties according to laboratory testing parameter at N R AGARWAL INDUSTRIES LTD Unit-1 - Vapi.
- All properties are tested in controlled climatic condition.
- This specification can be improved further, Subject to product upgradation.
- Tolerance is based upon 86% confidence limit of single mill measurement of conditioned random sample.
- This specification sheets super goods all the earlier specification sheets.
- 100% FSC Recycle board is supply on demand.