


Double-sided adhesive tape for overlaps sealing

PRODUCT DESCRIPTION

JUTADACH SP 38 is an adhesive tape for sealing the overlaps of JUTADACH, JUTAFOL and JUTATOP roofing underlays.

- **JUTADACH SP 38** is based on polyacrylic adhesive with a reinforcement and top release liner.
- **JUTADACH SP 38** is double-sided adhesive tape primarily determined for sealing the overlaps of underlays, or wall membranes. It creates weather and air-tight seals, supporting the correct functionality of roofs and wall constructions. It blocks blowing of snow or dynamic rain in the thermal insulation and prevents overlaps from flapping.
- **JUTADACH SP 38** maintains long-term adhesion to the underlay, preventing delamination effects.

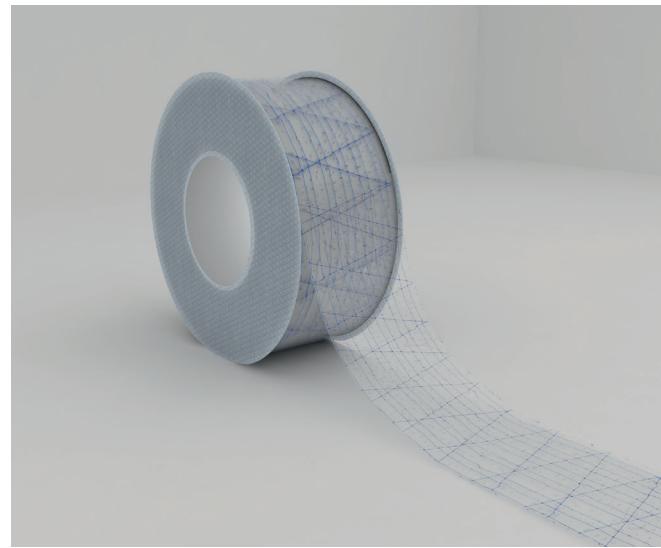

TECHNICAL DATASHEET

WIDTH	38 mm
ROLL LENGTH	50 m
TOTAL THICKNESS	0.34 mm
PACKAGING	16 rolls/box (28 boxes/pallet)
STORAGE TEMPERATURE	+5 °C +25 °C
TEMPERATURE RANGE	-40 °C +100 °C +130 °C short term
APPLICATION TEMPERATURE	-10 °C +40 °C (recommended +5 °C)
BACKING	PET carrier
ADHESIVE	Polyacrylic adhesive
ADHESIVE COAT	240 g/m ²
ADHESION	30 – 50 N/ 25 mm
TACK	Very high
SHEAR STRENGTH	medium
RELEASE LINER	LDPE film
TENSILE STRENGTH	≥ 50 N/ 25 mm

INSTALLATION

- Prior to the installation of **JUTADACH SP 38** ensure all surfaces to be sealed are firmly fixed, clean, dry and smooth.
- Affix the tape by simple unrolling, using hand pressure to the underlay, positioning the tape within the overlap area, close to the overlap line.
- Once the underlay overlap is created, remove the release liner of the tape and use manual pressure to create a good seal. Pay attention to correct hand pressure in case of unsupported underlay installations.
- **JUTADACH SP 38** should be installed loose, flat and without wrinkles.

STORAGE

- Rolls should be stored in a clean, dry place, and kept away from direct sunlight.

! This is an indicative document, which does not substitute the installation guideline. When installing this product, local building installation regulations and instructions must be taken into account.