


PRODUCT DESCRIPTION

JUTADACH SP UNI is a universal installation tape for external and internal applications.

- **JUTADACH SP UNI** is a one-sided tape based on polyacrylate adhesives with a plastic carrier and release liner.
- **JUTADACH SP UNI** is a tape widely usable for **JUTADACH**, **JUTATOP** and **JUTAFOL** roofing underlays installations; it is used mainly for sealing and connecting of all types of roofing construction components with the underlays, or for repairs of small damages or rips of **JUTADACH** underlays.
- **JUTADACH SP UNI** is also suitable for air-tight sealing of **JUTAVAP** and **JUTAFOL N** vapour control layers.
- **JUTADACH SP UNI** tape perfectly adheres to a wide range of materials like wood, metal, bricks and plastics.
- **JUTADACH SP UNI** is moisture resistant, and UV resistant for 4 months of free weather exposure.

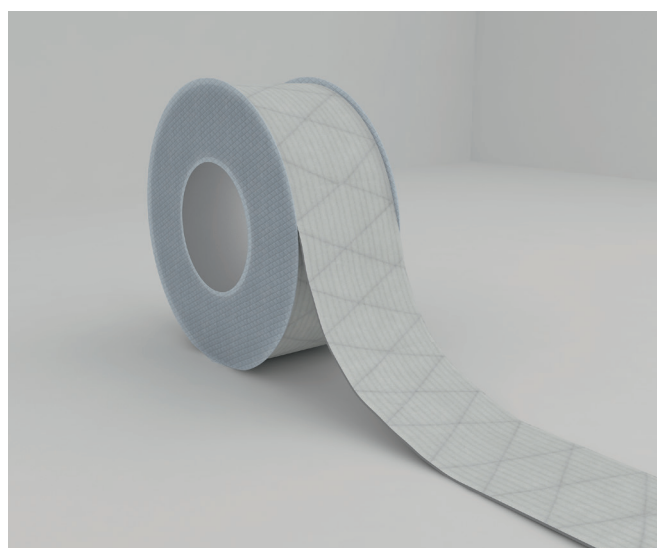

TECHNICAL DATASHEET

WIDTH	60 mm
ROLL LENGTH	25 m
TOTAL THICKNESS	0.34 mm
PACKAGING	10 rolls/box (42 boxes/pallet)
STORAGE TEMPERATURE	+5 °C +25 °C
TEMPERATURE RANGE	-40 °C +80 °C
APPLICATION TEMPERATURE	+5 °C +40 °C
BACKING	PE film with UV
ADHESIVE	Polyacrylate adhesive
COLOUR	White with print
ELONGATION AT BREAK	150 %
MOISTURE RESISTANCE	permanent resistance
TENSILE STRENGTH	≥ 50 N/ 25 mm

INSTALLATION

- Prior to the installation of **JUTADACH SP UNI** ensure all surfaces to be sealed are firmly fixed, clean, dry and smooth.
- Remove the release liner and affix the tape using hand pressure.
- **JUTADACH SP UNI** should be installed loose, flat and without wrinkles.
- Working temperature min. 5 °C

STORAGE

- Rolls should be stored in a clean dry place, and kept away from direct sunlight.

! This is an indicative document, which does not substitute the installation guideline. When installing this product, local building installation regulations and instructions must be taken into account.