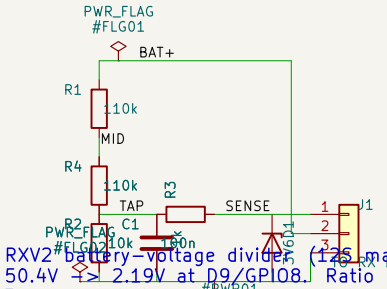

RXV2 battery-voltage divider (12S max)
50.4V -> 2.19V at D9/GPIO8. Ratio (110k+110k+10k)/10k = 23.0
Top leg split in two: voltage margin + fails safe if one resistor shorts.
R3 + D1 guard the GPIO; D1 optional (fit for extra safety).
ONE lead does everything: J1 pin1 SENSE -> D9, pin2 BAT+ (CENTRE,
servo convention), pin3 GND. A reversed plug swaps SENSE/GND = harmless.

Malcolm Messiter		
Sheet: /		
File: RXV2_VDIV.kicad_sch		
Title: RXV2 VBAT divider		
Size: A4	Date:	**Rev: v1.2**
KiCad E.D.A. 10.0.3		Id: 1/1