
HIGH-TEMPERATURE ALUMINIUM FOIL LABEL

DURABLETAG

AUL 6050

ALUMINIUM 200 TC MATT WHITE SA88 WG

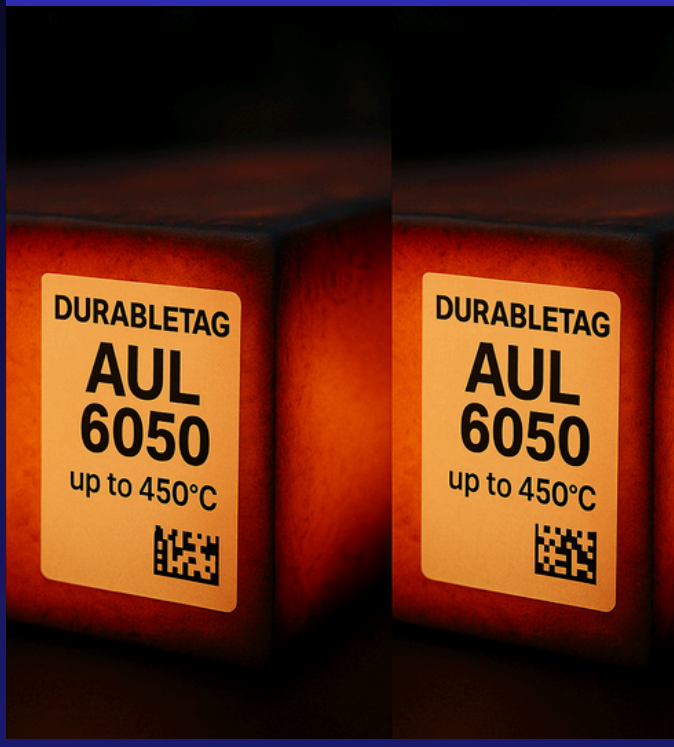

Product Code: AUL 6050

Product Name: ALUMINIUM 200 TC MATT WHITE SA88 WG

Facestock: A durable aluminium foil with a high-temperature resistant, highly opaque, semi-matt white topcoat. The smooth surface is print treated to achieve good TT printability and ink anchorage.

Basis Weight: 202 g/m² ISO 536

Caliper: 75 µm ISO 534

Adhesive: SA88 is a high temperature acrylic adhesive with excellent heat and chemical resistance.

Liner: White , a supercalendered glassine paper.

Basis Weight: 80g/m² ISO 536

Caliper: 68 µm ISO 534

Total Caliper: 194 µm±10% ISO 534

Min. Application: Temp. 10 °C = 50 °F

Temperature Range, Including Short-Term Exposure:
−40 °C to +450 °C (−40 °F to +842 °F)

Short-Term Exposure (<5 min): +450 °C (+842 °F)

Continuous Operating Temperature:
−40 °C to +300 °C (−40 °F to +572 °F)

ALUMINIUM 200 TC MATT WHITE SA88 WG label is used for identification purposes in the metal industry.
The product demonstrates excellent tear strength, heat resistance, dimensional stability and chemical resistance. It is suitable for applications in which labels are exposed for short periods to high temperatures up to +450°C.
The specially designed topcoat in combination with the appropriate thermal transfer ribbon features high abrasion, scratch, heat and solvent resistance.
Typical applications include identification labels in the steel industry when high heat resistance is required.

Application tests are highly recommended.

-40 °C to +300 °C continuous
Up to +450 °C for <5 min

RoHS	PPWR	REACH
SUBSTANCE TESTING	HEAVY-METAL SCREENING	SVHC SCREENING
TESTED COMPONENT ONLY	ARTICLE 5(4) — HEAVY METALS ONLY	TESTED SAMPLE / GROUP ONLY

Shelf Life: To obtain optimal performance, use this product within one year of the date of manufacture, under storage conditions as defined by FINAT (20–25 °C; 40–50% RH). Prolonged storage outside these conditions may reduce the shelf life.

Warranty: © 2023, DURABLETAG

DURABLETAG products are sold on the understanding that the Buyer will test them under actual conditions of use and determine their suitability for the intended application.

DURABLETAG warrants to the Buyer that its products are free from defects in materials and workmanship. DURABLETAG's obligations under this warranty are limited to replacing products demonstrated to the satisfaction of DURABLETAG to have been defective, provided that the Buyer has complied with the handling, storage and shelf life requirements specified in the applicable DURABLETAG material specifications.
The above warranties extend solely to the Buyer, and all warranty claims must be made by the Buyer. Rework or replacement shall not alter the original warranty period. In all cases, the warranty period shall not exceed thirty (30) days from the date of the original shipment.

THE ABOVE WARRANTIES ARE EXCLUSIVE OF AND IN LIEU OF ALL OTHER WARRANTIES, WRITTEN OR ORAL, EXPRESS OR IMPLIED, STATUTORY OR OTHERWISE. NO IMPLIED STATUTORY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE SHALL APPLY. DURABLETAG SHALL NOT BE LIABLE, EITHER IN TORT OR IN CONTRACT, FOR ANY LOSS OR DAMAGE, DIRECT, INCIDENTAL OR CONSEQUENTIAL, ARISING OUT OF THE USE OF OR INABILITY TO USE THE PRODUCT, OR FROM DELAY IN THE REPLACEMENT OR REPAIR OF PRODUCTS UNDER THE ABOVE WARRANTY.

Rev. 02 | 01 Nov 2026

www.durabletag.com