
HIGH-TEMPERATURE POLYIMIDE TAG

DURABLETAG

PMT 7060

POLYIMIDE 150 | WHITE DOUBLE-SIDED TOPCOAT

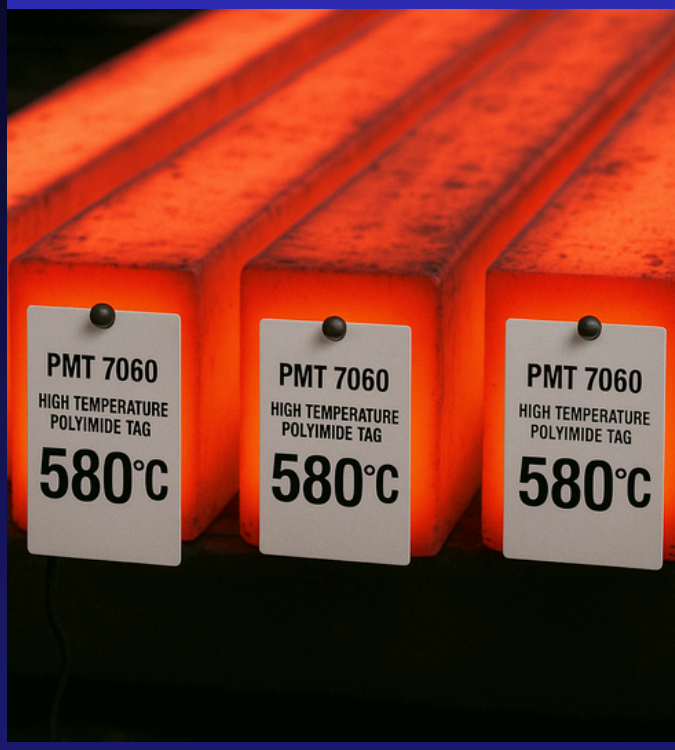

Product Code: PMT 7060

Product Name: POLYIMIDE 150 | WHITE DOUBLE-SIDED TOPCOAT

Facestock: PMT 7060 is a polyimide-based tag material with a white topcoat on both sides for thermal transfer printing. Material integrity and printed-image durability must be verified with the selected ribbon under the intended process conditions.

Basis Weight: 200 g/m² ±10%

Caliper: 150 µm ±10%

Construction: Non-adhesive tag

Temperature Limits, Including Short-Term Exposure: -80 °C to +580 °C (-112 °F to +1076 °F)

Short-Term Exposure: (<5 min): +580 °C (+1076 °F)

Continuous Operating Temperature: -40 °C to +400 °C (-40 °F to +752 °F)

POLYIMIDE 150 | WHITE DOUBLE-SIDED TOPCOAT is a hang tag label used for identification purposes in the metal industry.
The product demonstrates excellent tear strength, heat resistance, dimensional stability and chemical resistance. It is suitable for applications in which tags are exposed short term to high temperatures up to +580 °C.
The specially designed topcoat in combination with the appropriate thermal transfer ribbon features high abrasion, scratch, heat and solvent resistance.
Typical applications include identification tags in the steel industry when high heat resistance is required.

- Application tests are highly recommended.

-40 °C to +400 °C continuous
Up to +580 °C for <5 min

RoHS	PPWR	REACH
SUBSTANCE TESTING	HEAVY-METAL SCREENING	SVHC SCREENING
TESTED COMPONENT ONLY	ARTICLE 5(4) — HEAVY METALS ONLY	TESTED SAMPLE / GROUP ONLY

Shelf Life: To obtain optimal performance, use this product within one year of the date of manufacture, under storage conditions as defined by FINAT (20–25 °C; 40–50% RH). Prolonged storage outside these conditions may reduce the shelf life.

Warranty: © 2023, DURABLETAG

DURABLETAG products are sold on the understanding that the Buyer will test them under actual conditions of use and determine their suitability for the intended application.

DURABLETAG warrants to the Buyer that its products are free from defects in materials and workmanship. DURABLETAG's obligations under this warranty are limited to replacing products demonstrated to the satisfaction of DURABLETAG to have been defective, provided that the Buyer has complied with the handling, storage and shelf life requirements specified in the applicable DURABLETAG material specifications.
The above warranties extend solely to the Buyer, and all warranty claims must be made by the Buyer. Rework or replacement shall not alter the original warranty period. In all cases, the warranty period shall not exceed thirty (30) days from the date of the original shipment.

THE ABOVE WARRANTIES ARE EXCLUSIVE OF AND IN LIEU OF ALL OTHER WARRANTIES, WRITTEN OR ORAL, EXPRESS OR IMPLIED, STATUTORY OR OTHERWISE. NO IMPLIED STATUTORY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE SHALL APPLY. DURABLETAG SHALL NOT BE LIABLE, EITHER IN TORT OR IN CONTRACT, FOR ANY LOSS OR DAMAGE, DIRECT, INCIDENTAL OR CONSEQUENTIAL, ARISING OUT OF THE USE OF OR INABILITY TO USE THE PRODUCT, OR FROM DELAY IN THE REPLACEMENT OR REPAIR OF PRODUCTS UNDER THE ABOVE WARRANTY.

Rev. 02 | 01 Nov 2026

www.durabletag.com