
HIGH-TEMPERATURE POLYESTER TAG FOR DRY-TONER LASER PRINTING

DURABLETAG

PST 7051

LASER POLYESTER 145 MATT WHITE 2S TAG

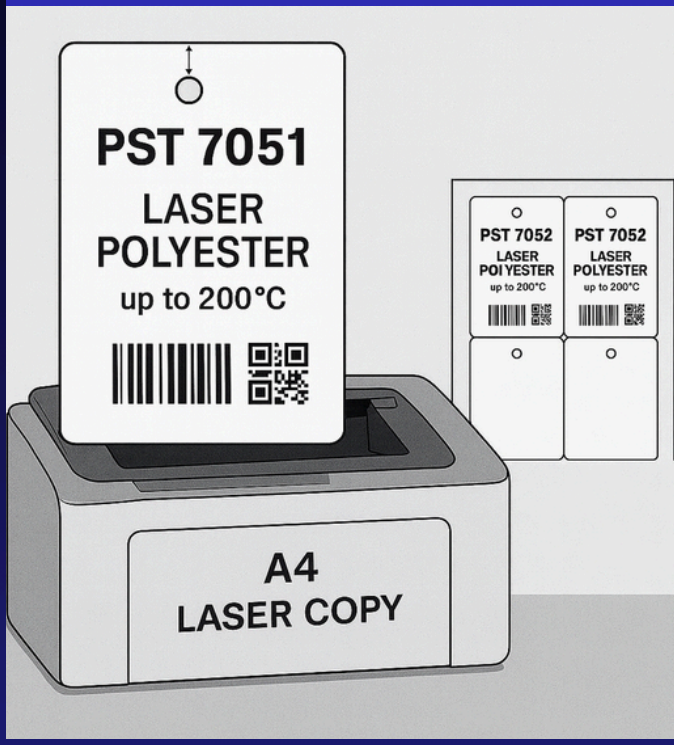

Product Code: PST 7051

Product Name: LASER POLYESTER 145 MATT WHITE 2S TAG

Facestock: PST 7051 is a matt white, opaque polyester film coated on both sides for dry-toner laser printing. Its nominal caliper is 145 µm. Compatibility must be verified with the intended printer and fusing conditions.

Basis Weight: 210 g/m² ±10%

Caliper: 145 µm ±10%

Construction: Non-adhesive tag

Temperature Limits, Including Short-Term Exposure: -40 °C to +200 °C (-40 °F to +392 °F)

Short-Term Exposure: (<5 min): +200 °C (+392 °F)

Continuous Operating Temperature: -40 °C to +160 °C (-40 °F to +320 °F)

Opacity: >95 % ISO 2471

Bekk Smoothness: <35 s ISO 5627

Tensile strength MD: 130 MPa ISO 527-1
Tensile strength CD: 150 MPa ISO 527-1

LASER POLYESTER 145 MATT WHITE 2S TAG is a hang tag label used for identification purposes in the metal industry.

- This product is suitable for tags (e.g., garden centre tags) and graphic arts (e.g., leaflets) applications. The special nature of the top coat gives good toner adhesion and improved water resistance of the printed image.

-40 °C to +160 °C continuous
Up to +200 °C for <5 min

Shelf Life: To obtain optimal performance, use this product within one year of the date of manufacture, under storage conditions as defined by FINAT (20–25 °C; 40–50% RH). Prolonged storage outside these conditions may reduce the shelf life.

Warranty: © 2023, DURABLETAG

DURABLETAG products are sold on the understanding that the Buyer will test them under actual conditions of use and determine their suitability for the intended application.

DURABLETAG warrants to the Buyer that its products are free from defects in materials and workmanship. DURABLETAG's obligations under this warranty are limited to replacing products demonstrated to the satisfaction of DURABLETAG to have been defective, provided that the Buyer has complied with the handling, storage and shelf life requirements specified in the applicable DURABLETAG material specifications.
The above warranties extend solely to the Buyer, and all warranty claims must be made by the Buyer. Rework or replacement shall not alter the original warranty period. In all cases, the warranty period shall not exceed thirty (30) days from the date of the original shipment.

THE ABOVE WARRANTIES ARE EXCLUSIVE OF AND IN LIEU OF ALL OTHER WARRANTIES, WRITTEN OR ORAL, EXPRESS OR IMPLIED, STATUTORY OR OTHERWISE. NO IMPLIED STATUTORY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE SHALL APPLY. DURABLETAG SHALL NOT BE LIABLE, EITHER IN TORT OR IN CONTRACT, FOR ANY LOSS OR DAMAGE, DIRECT, INCIDENTAL OR CONSEQUENTIAL, ARISING OUT OF THE USE OF OR INABILITY TO USE THE PRODUCT, OR FROM DELAY IN THE REPLACEMENT OR REPAIR OF PRODUCTS UNDER THE ABOVE WARRANTY.

Rev. 02 | 01 Nov 2026

www.durabletag.com