

UKAS QUALITY MANAGEMENT 005

SYSTEM CERTIFICATION ISO 9001:2008 SGS

ACROW

Formwork Technology

Acrow Cup Lock System

ACROW MISR Provides Full Site Service Based On More Than 35 Years Experience In The Field


ACROW
Formwork Technology



ACROW
Formwork Technology



Contents

Introduction	2
Advantages	3
Features	4
Cup Lock Standards Loading	6
Application	7
Componants	10

ACROW Formwork Technology

Introduction

Being one of the largest formwork and scaffolding companies, we are introducing the Cuplock system. It is a complete system that provides access scaffolding and formwork slab support.

This formwork slab support can be used in a wide variety of applications from light to heavy duty scaffolding and shoring for buildings and other civil engineering work. In addition, no loose fittings are required. A hammer is the only tool required for erection and dismantling of the system.

Several accessories ensure the adaptability of the system to a wide variety of applications.





Advantages

•It can be used for both scaffolding and shoring systems.
•Minimum supervision is required since the system is rapidly erected and dismantled using the interlocking components which are rigidly secured with two cups. Simply hammered with no need for spanners.
•Due to the lightness of the system components, all can be easily handled by one man.
•Ledgers are non-load bearing and can therefore be assembled at handrail height on external faces of independent scaffolding, thus offering the additional safety of handrails at all working levels.
•Working levels can be changed speedily and simply without disturbing the main structure of the scaffold.
•Cup-lock system components are manufactured from high quality tube having the same outside diameter as the traditional scaffold tube to facilitate tying scaffold to the building.





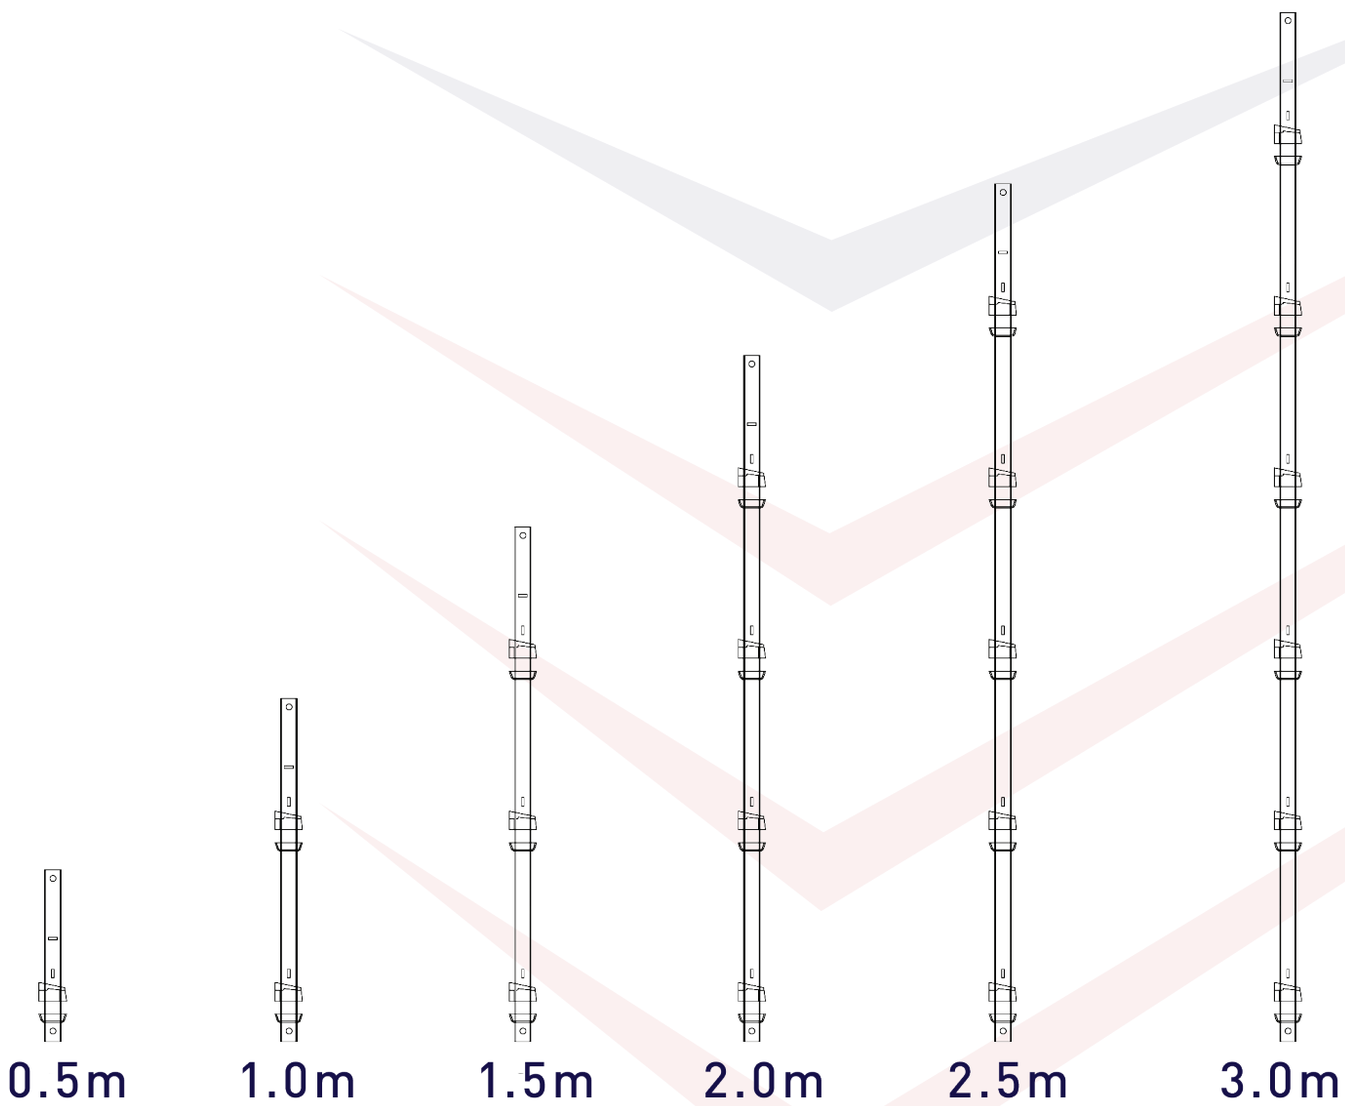




Features

1- Standards

The standard is the vertical member of cup lock system. It is made from high grade steel tube with outer diameter of 48.3 mm and thickness of 3.2 mm.
A series of bottom cups are welded at nominal 500 mm centers and free top cup to ensure providing a safe connection at any direction for the horizontal ledger attachment. Cup-lock sizes vary from 0.5 m to 3.0 m.



Features

2 -Ledger

The ledger is the horizontal member used to connect the standards in both the longitudinal and transversal directions. It is made of the same vertical tube.
They are welded together to blade the ends and fit in the bottom cup located in the standard.
Ledger sizes vary from 0.6 m to 2.4 m.

0.6m 

0.9m 

1.2m 

1.5m 

1.8m 

2.1m 

2.4m 

Cup lock standards loadings

Technical Data

•Restrained From 2 Directions

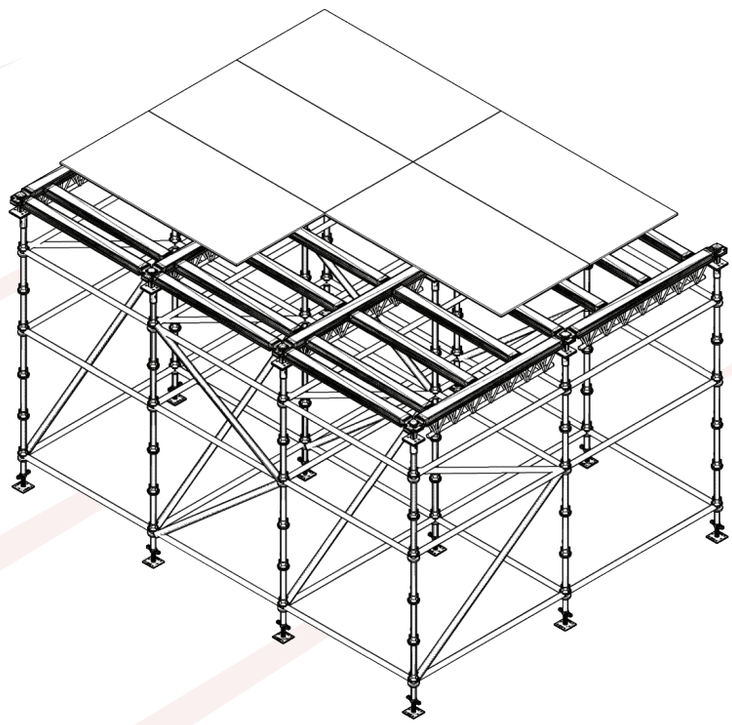


•Restrained From 4 Directions

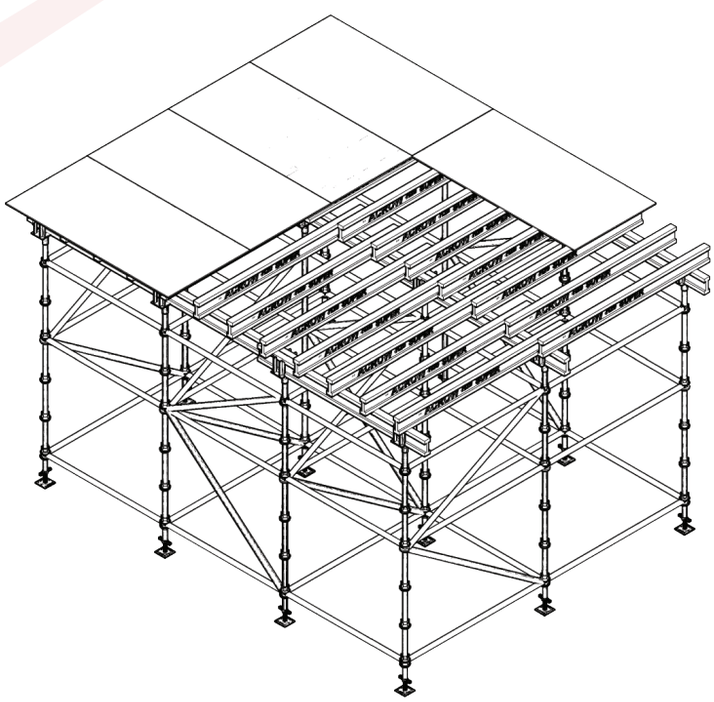


Application

Cup lock can be applied on the following:
- Early striking system using Cup lock verticals & ledgers, drop heads, decking and infill beams.
- Cup lock and Timber beams.
- Cup lock scaffolding.
- Cup lock staircase.



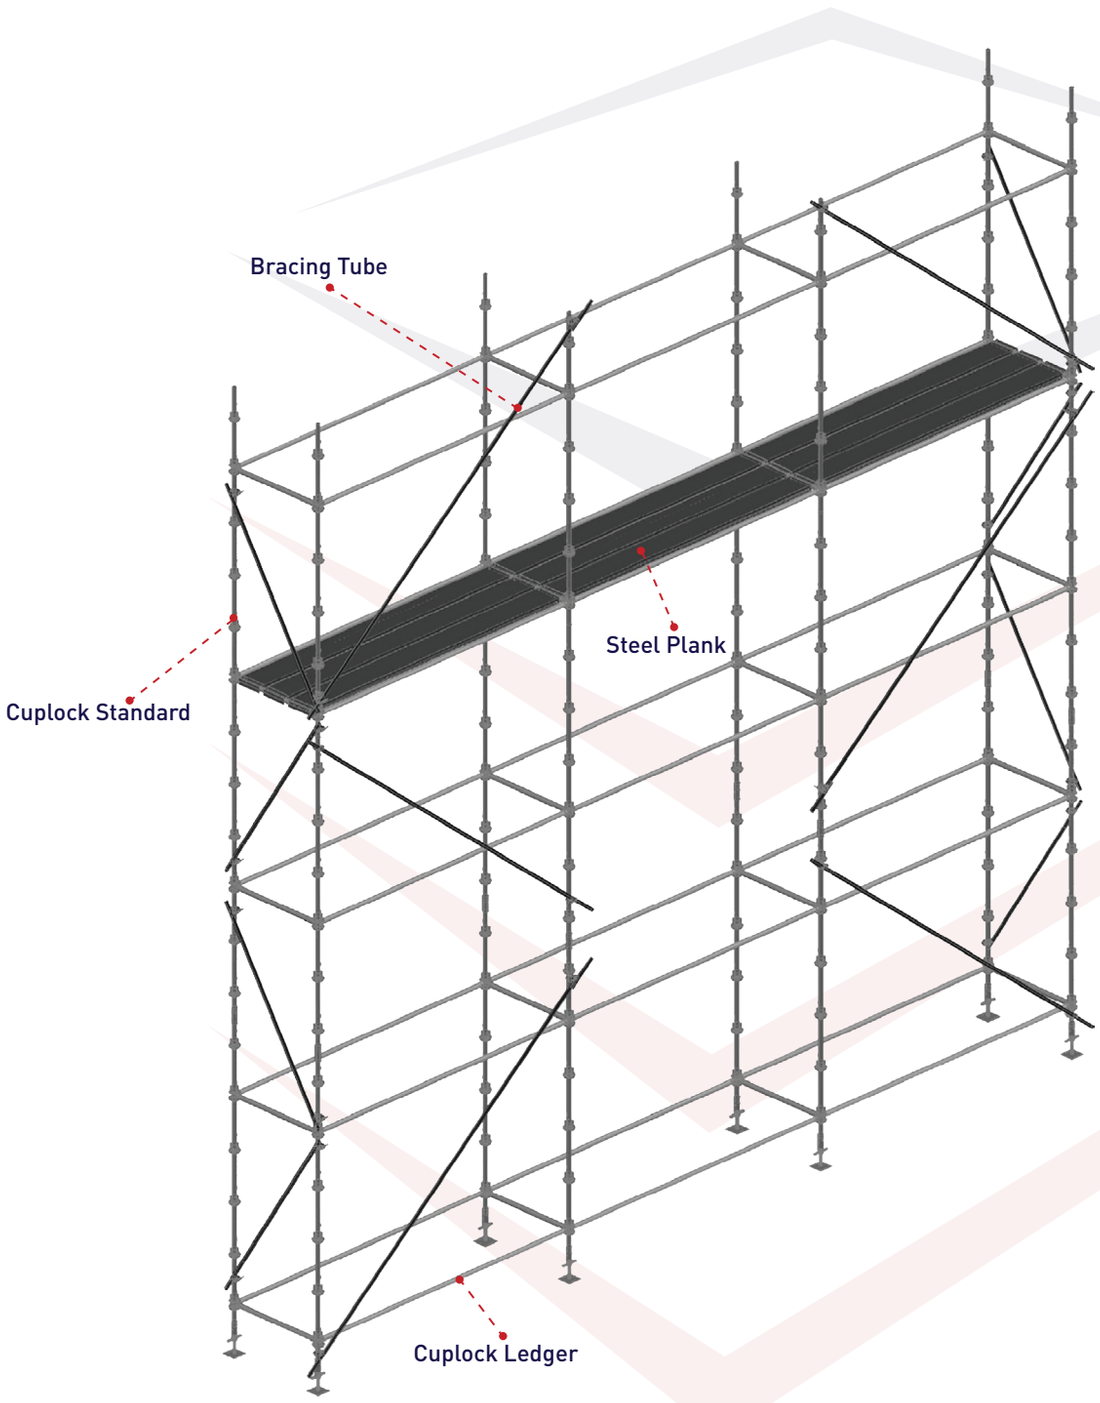
Early striking system



Cup Lock and Timber beams

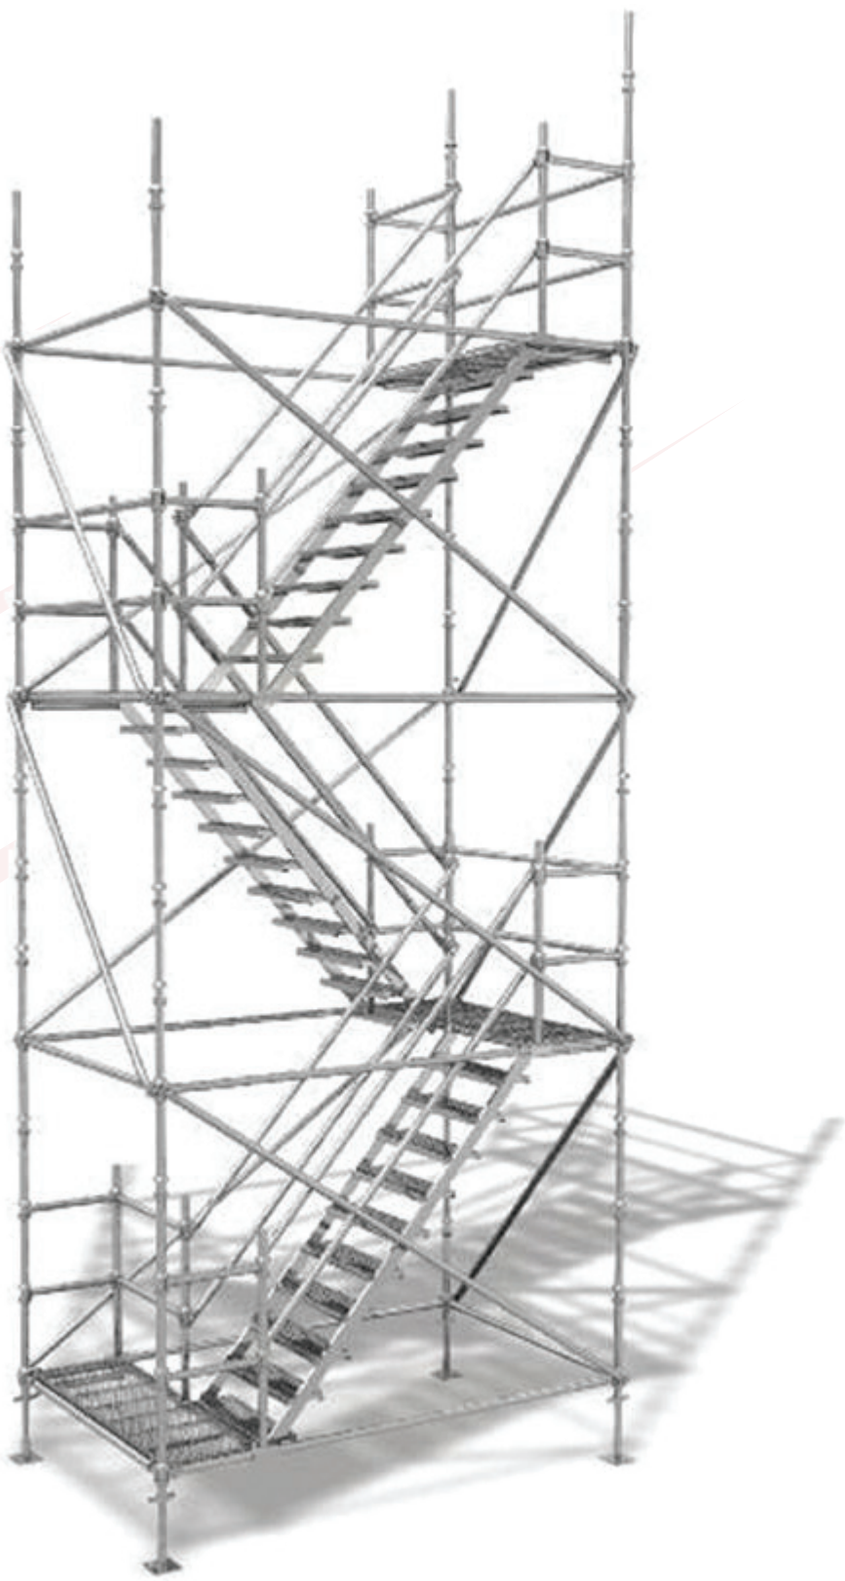
Applications

- **Cup lock scaffolding**

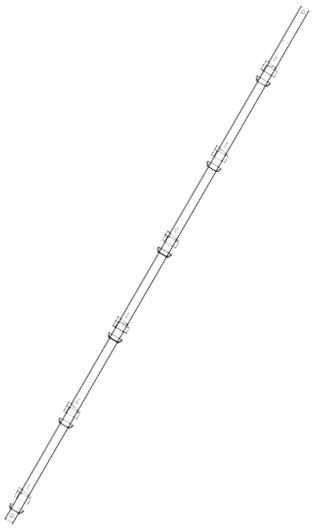


Applications


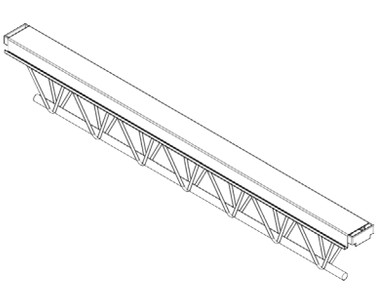
- **Cup lock staircase**







Componants

Item	Description	Code no.	Weight (kg)
	Cup lock vertical 3.00m 2.50m 2.00m 1.50m 1.00m 0.50m	 6221177056070 6221177056063 6221177056056 6221177056049 6221177056032 6221177056025	 10.86 9.05 7.25 5.45 3.65 1.825
	Cuplock ledger 2.40m 2.10m 1.80m 1.50m 1.20m 0.90m	 6221177056018 6221177056001 6221177055998 6221177055981 6221177055974 6221177055967	 8.34 7.33 6.33 5.32 4.32 3.31
	Cuplock cantiliver bracket 1.20/1.50 m	6221177045050	22.0




Componants

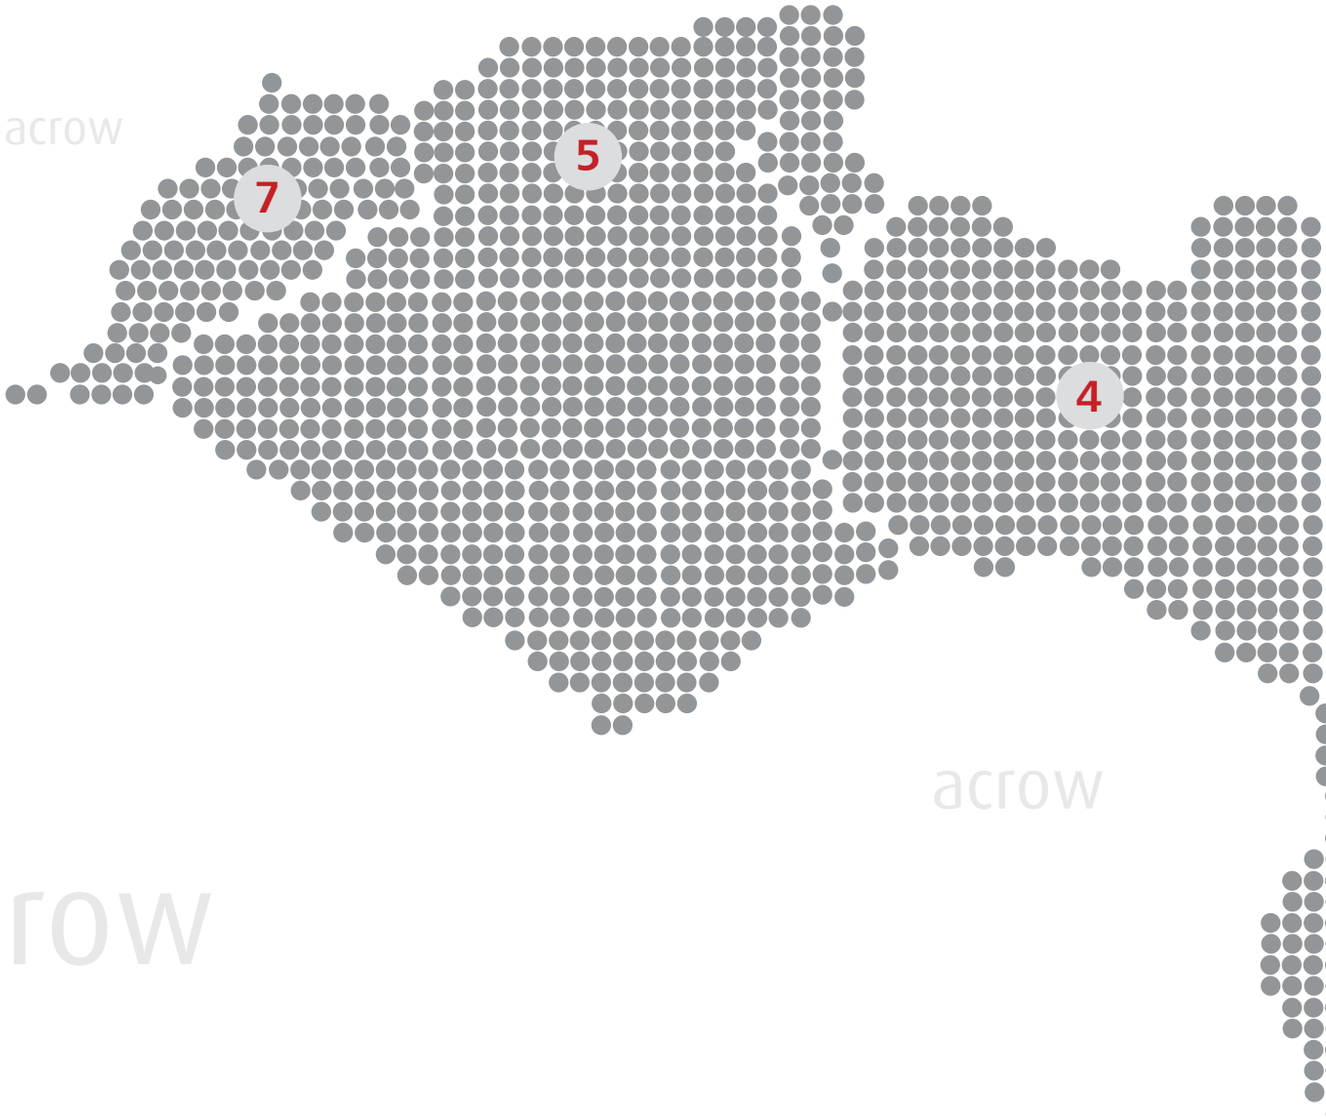
Item	Description	Code no.	Weight (kg)
	Scaffolding Tube ,L=1.00 m Scaffolding Tube,L=1.50 m Scaffolding Tube,L=2.00 m Scaffolding Tube,L=2.50 m Scaffolding Tube,L=3.00 m Scaffolding Tube,L=3.50 m Scaffolding Tube,L=4.00 m Scaffolding Tube,L=4.50 m Scaffolding Tube,L=5.00 m Scaffolding Tube,L=6.00 m	6221177017354 6221177017385 6221177017392 6221177017392 6221177017415 6221177017422 6221177017439 6221177017446 6221177017453 6221177017552	2.85 4.25 5.70 7.25 8.50 9.95 11.40 12.85 15.65 17.10
	Drop head 4-Sides	6221177008970	5.74
	Decking Beam , L =0.9 M Decking Beam , L =1.2 M Decking Beam , L =1.5 M Decking Beam , L =1.8 M Decking Beam , L =2.10 M Decking Beam , L =2.4 M	6221177008673 6221177008680 6221177008697 6221177008703 6221177008710 6221177008727	13.25 14.50 15.30 16.65 22.35 23.75

Componants

Item	Description	Code no.	Weight (kg)
	Infill Beam , L =0.60 M Infill Beam , L =0.90 M Infill Beam , L =1.2 M Infill Beam , L =1.50 M Infill Beam , L =1.80 M	6221177010508 6221177010515 6221177010522 6221177010539 6221177010546	1.90 2.95 3.80 4.80 5.75
	Timber H20 L =2.50 m Timber H20 L =2.90 m Timber H20 L =3.30 m Timber H20 L =3.60 m Timber H20 L =3.90 m Timber H20 L =4.50 m Timber H20 L =4.90 m Timber H20 L =5.90 m	6221177024062 6221177024076 6221177024093 6221177024109 6221177024116 6221177024130 6221177024147 6221177024154	11.25 13.00 14.85 16.20 17.55 20.22 22.05 26.55
	Acrow U-Head Jack Solid	6221177025922	7.40
	Post Head Jack Solid 34mm (H)	6221177013097	7.10

Componants

Item	Description	Code no.	Weight (kg)
	Plain Base	6221177000851	1.40
	pressed Prop double Coupler	6221177006969	1.40
	presed Prop swivel Coupler	6221177006976	1.25



acrow

1 Egypt

Acrow Misr
Head Office, Factory:
Wady Houf, Helwan
Tel: +202 23690 616 / 23690 739
+202 23695 700 / 23699 976
Fax: +202 23695 260
E.mail: info@acrow.co

Alex Branch
27 Dr. mahmoud Daoud st.,
Tel: +203 4200 289
E.mail: acrowalex@acrow.co

Port Said Branch
El freepor Bulding
Tel: +2066 3232542
acrowportsaid@acrow.co

2 KSA

Acrow Al saudia Ltd co.
P.O.Box : 305746-Riyadh-11361
Saudi Arabia Riyadh branch:
Tel : +966 1 2160504
Fax : +966 1 2160503
Email : acrowriyadh@acrow.co

Jeddah branch:
Tel : +966 2 639 16 24
Fax :+966 2 691 85 45
Email : acrowjeddah@acrow.co

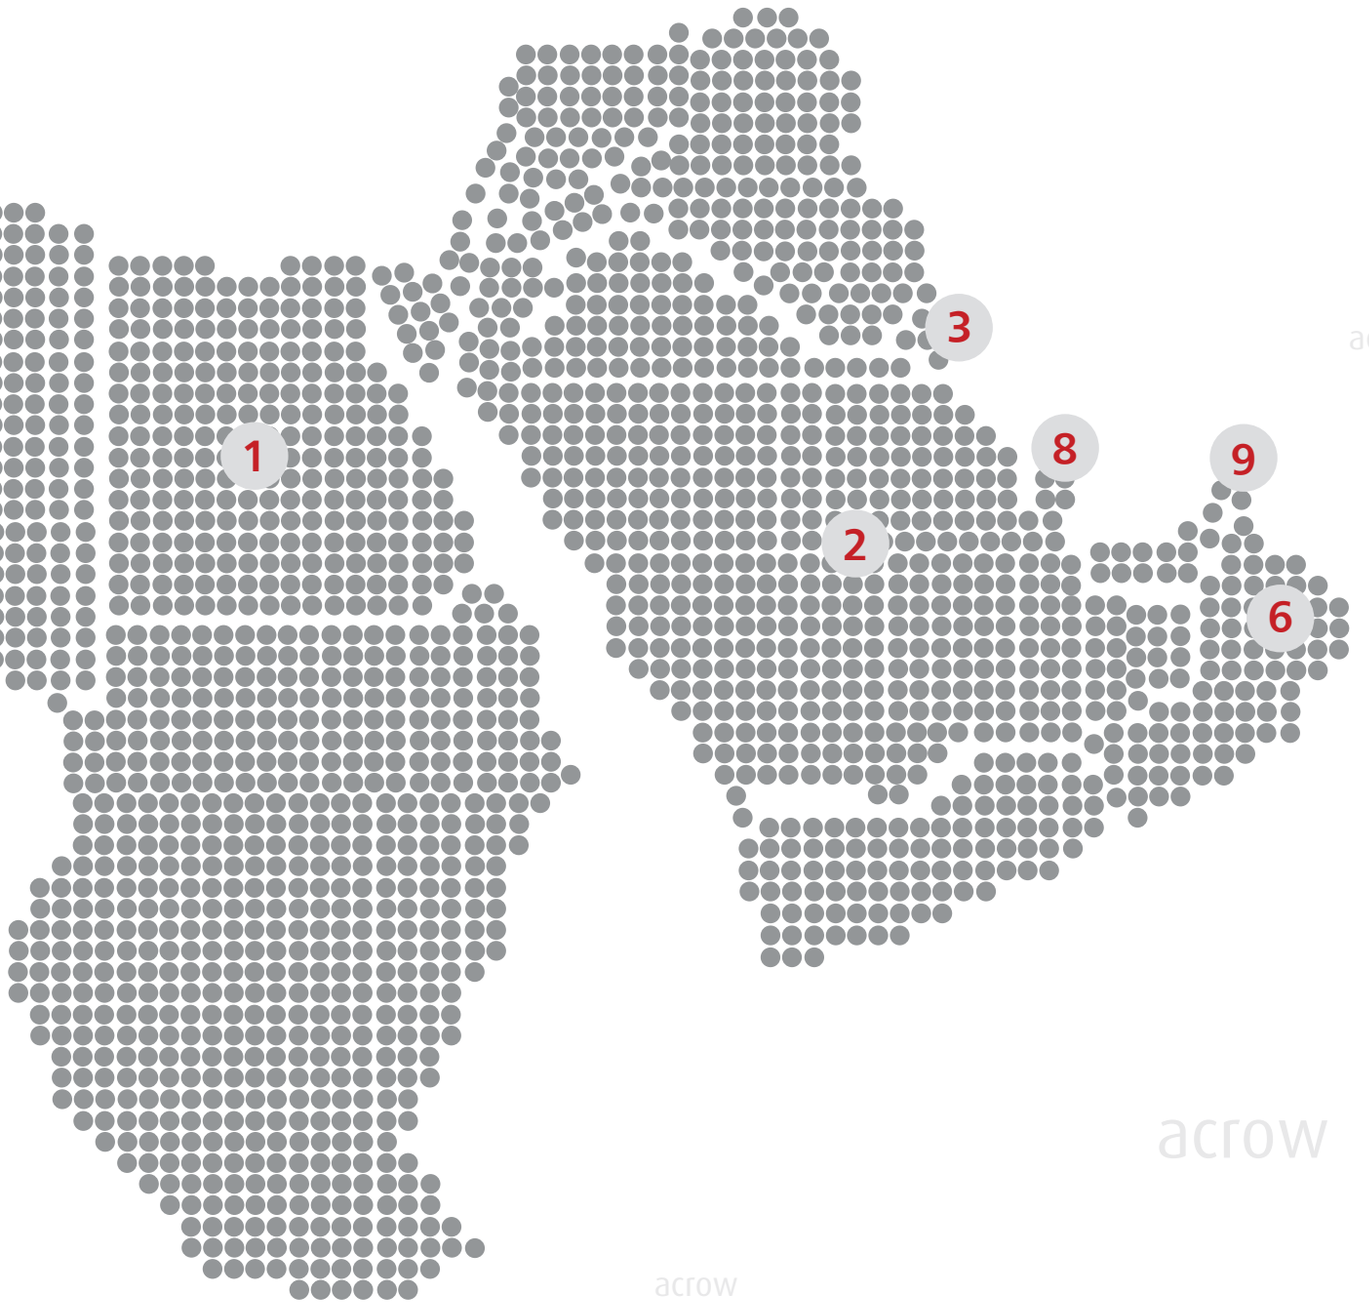
Damam branch:
Tel: +966 3 8054151

3 Kuwait

Khalid Ali, Al Kaharafi
& Bros. Co. W.LL
Tel: +965 4813 127 / 4817 289
Fax: +965 4835 501
E.mail: acrowkuwait@acrow.co

4 Libya

Acrow Tripoli
Tel: +218 91 411 6873 / 91 331 9367
Fax: +218 21 351 3838
E.mail: acrowlibya@acrow.co



acrow

5 Algeria

ACROW-DZ COMPANY
Tel: +213 (0) 21 75 54 74/63/64
Tel: +213 (0) 21 50 55 58
Fax: +213 (0) 21 50 55 58
Address : Siege Social cité des travailleurs
lot. 09 groupe 02 Dar El beida, Alger
Email : acrow-dz@acrow.co

6 Oman

Acrow Muscat
Tel: +968 9828 76 82
E.mail: acrowmuscat@acrow.co

7 Morocco

38 Rue Abou El Waqt, Res
Haydar El Jarrah, Rez
Chausser No. 10
Casblanca
e-mail: acrowmorocco@acrow.co

8 UAE

Acrow Gulf
Tel: +971 4343 94 98
Fax: +971 4343 95 98
E.mail: acrowgulf@acrow.co

9 Qatar

Acrow Qatar
Tel: +974 4582 357
Fax: +974 4582 376
E.mail: acrowqatar@acrow.co

ACROW
Formwork Technology


Acrow H20 & solider


Acrow One shutter solider


Acrow V.M.C


Acrow Tech-Form


Acrow Cuplock


Acrow Bridge table form



Acrow Circular column



Acrow climbing system


Acrow shorbrace Table form


Acrow Big steel panel


Acrow European prop


Acrow Vari form


Acrow Prop table form


Acrow frame


Acrow early striking system


Acrow Ring lock

www.acrow.co

02/2013, Code No.: 2007050061012