

UKAS QUALITY MANAGEMENT 005

SYSTEM CERTIFICATION ISO 9001:2008 SGS

ACROW

Formwork Technology

Acrow Prop Table Form

Acrow MISR Provides Full Site Service Based On More Than 35 Years Experience In The Field

ACROW

Formwork Technology





Contents

Introduction	2
Advantage	3
Product Overview	4
Table Shifting Trolley	5
Acrow C-Fork (S.W.L 1000)	6
Application	7
Slab Table Design	8
Acrow European Prop Loads	10
Components	11

ACROW
Formwork Technology

Introduction

Being one of the largest formwork and scaffolding companies in Egypt, We are introducing the prop table form system. The prop table form system doesn't only enables the contractor to achieve the highest productivity rates, where the building geometry requires special table shapes, but it also proved to be one of the most cost effective and fast moving systems over time.

In addition, Acrow prop table form system is one of the fastest selling props all over the world. Through more than 30 years of production, Acrow prop system succeeded to fulfill all the client requirements. The prop consists mainly of two telescoping steel tubes that enable any adjustments to be made in order to suit the site conditions.

Finally, as a part of Acrow's drive towards improved technology, Acrow added a new prop generation Acrow European props (AEP), where they are extendable floor props made of 100% galvanized steel to ensure a long service life. They are designed to be used as vertical props for temporary structures.




Advantage

•Given sufficient crane capacity, slab tables are the most cost-effective solution where there is a high degree of repetition and open facades.


•Acrow prop tables are easy and practical to set up and can be shifted and adapted very quickly. This makes them a cost-effective and efficient way of carrying out large-area slab projects.

No. of parts/m2	Weight [kg/m2]	Area [m2] per prop	Time [h/m2]
0.05	50	5.00	0.10

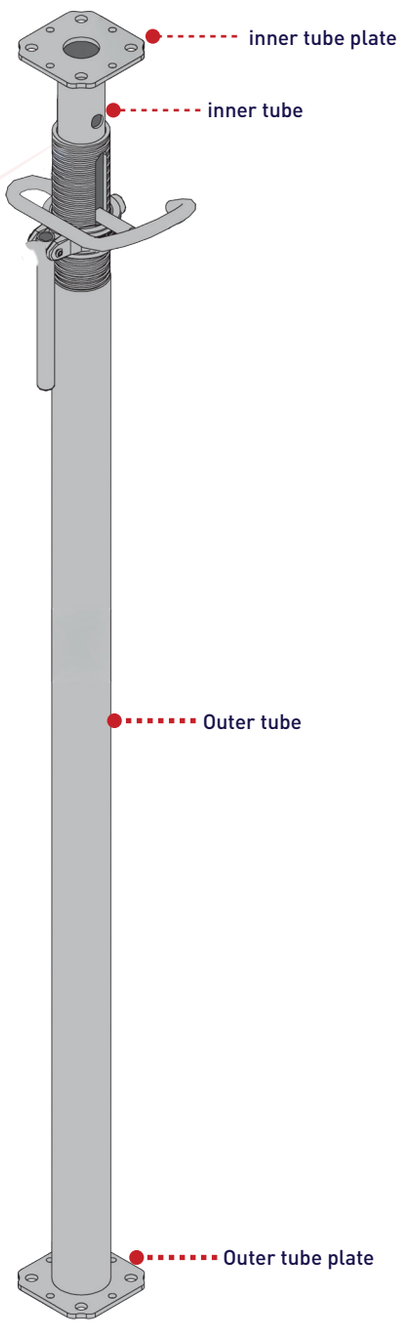

1. Easy and practical to set up.
2. Quickly shifted and adapted.
3. Cost effective and efficient to be used in carrying out large-area slab projects.
4. Applicable for slab heights up to 5.00 m.
5. Cycle custom formats are applicable where needed.
6. Wedge-lock allows quick and easy work regarding attaching and detaching the props.
7. Low stacking height when transported and stored.
8. Safe, fast shifting appliances, saving time and money.
9. Seamless forming continuation into infill zones and closure gaps.
10. Higher speed due to the technically perfected individual components.
11. Easy to tailor to the construction schedule due to the available commissioning quantities – No problem with a weekly cycle.
12. Using the AEP (Acrow European Prop) gives high load capacity with low weight.
13. The AEP is 100% galvanized Prop having high durability.

Product Overview

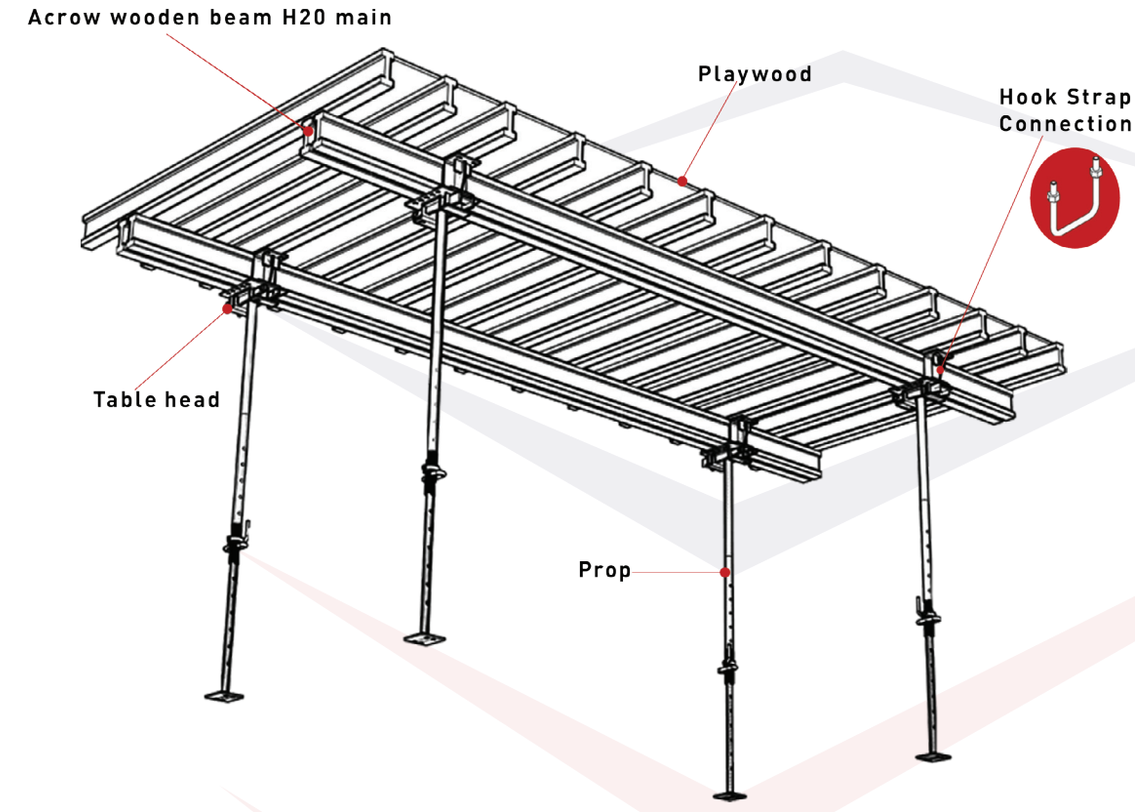

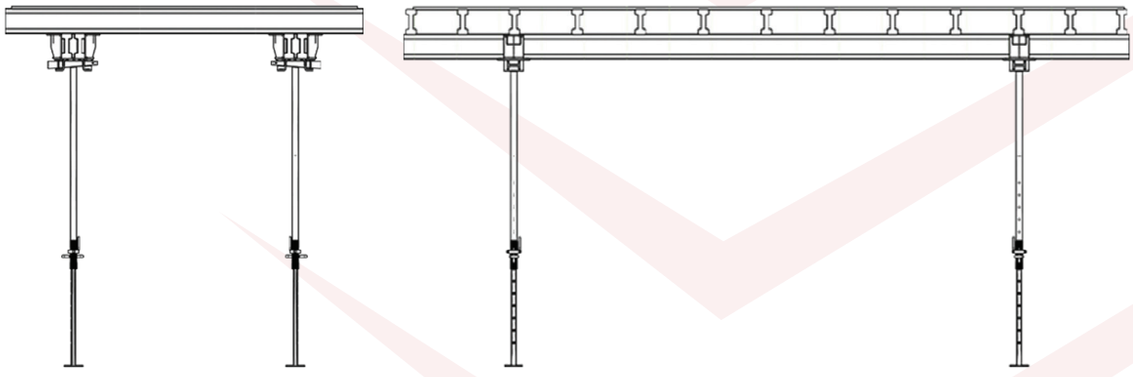


Table Shifting Trolley


The prop table form can be horizontally moved by the means of a table shifting trolley. For safety considerations, the table shifting trolley has to be positioned at the table center to avoid the table from moving.
For dismantling, the two supporting arms are raised using the winch below the main H20 timber beam, which serves the main guide.

Once the prop table rests on the table shifting trolley, the prop can be released and the inner tube is inserted to easily move the table.







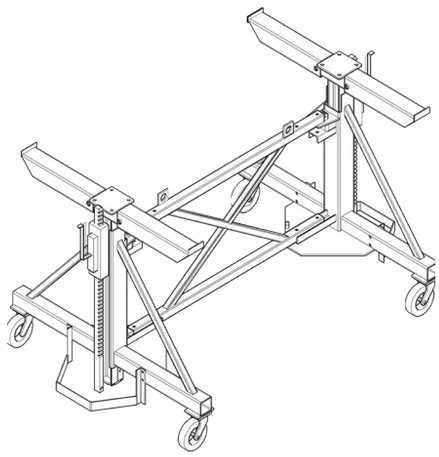


Acrow C-Fork (S.W.L1000)


Acrow C-Fork allows the easy lifting and moving both horizontally and vertically of the prop table from one position to another. Moreover, Acrow C-Fork dimensions are carefully chosen to suit the table dimensions. However, the prop can be either lifted from the short or long side.

Acrow C-Fork can be safely used for table size dimension up to 3.3 * 6.0 m and a safe working load up to 1.0 ton weight. Finally, Acrow C-Fork is available in two sizes:

- One floor shutter with 3.00 m height.
- Double floor shutter with 6.00 m height.




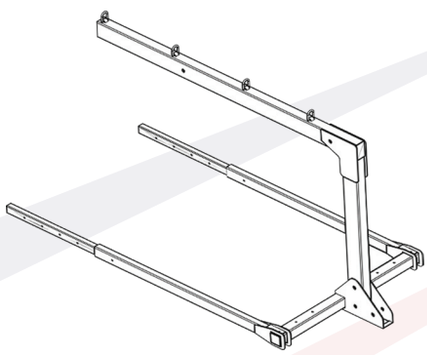

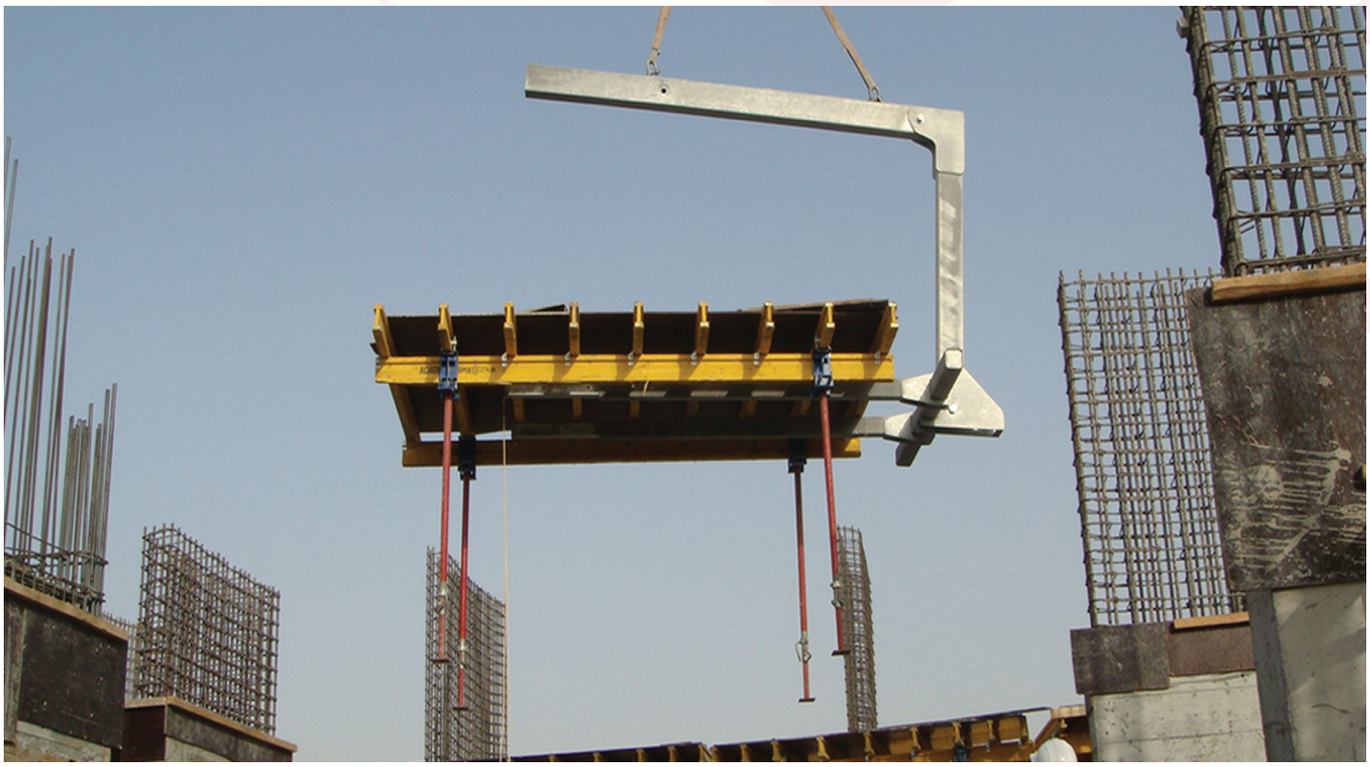

Applications



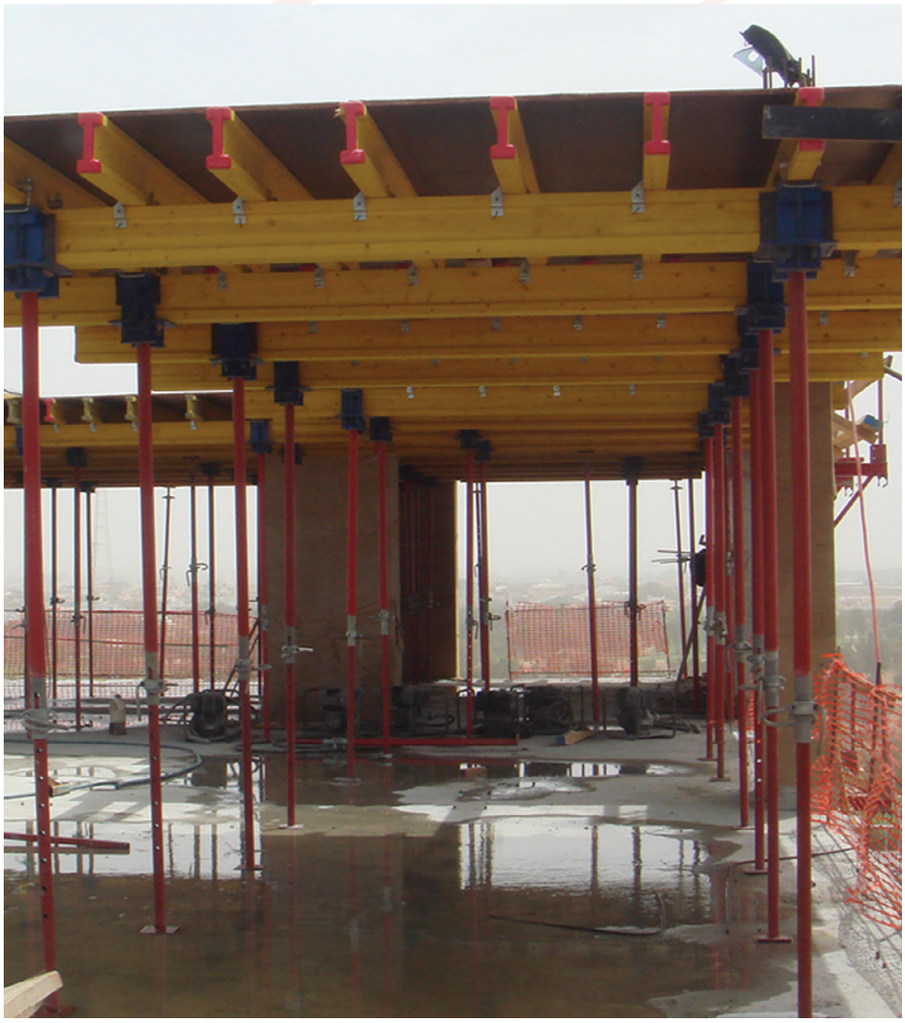



Slab Table Design


Slab Table with Main Girders 2 x H20

Slab Thickness 0.20 m; q = 7.0 kN/m²									
Table Length L [m]				**2.50**	**3.00**	**3.50**	**4.00**	**4.50**	**5.00**	**6.00**
Type 4 **c**[m]/**I**[m]				0.45/1.60	0.50/2.00	0.55/2.40	0.60/2.80	0.65/3.20		
Type 6 **c**[m]/**I**[m]							0.60/1.40	0.65/1.60		
Table Width B [m]	2.50	Main Girder Spacing b[m]	1.60	4/10.9	4/13.1	4/15.3	4/17.5	4/19.7	6/16.1	6/20.2
	3.00		2.00	4/13.1	4/15.8	4/18.4	4/21.0	6/16.8	6/19.3	6/24.3
	3.50		2.40	4/15.3	4/18.4	4/21.4	4/24.5	6/19.6	6/22.6	6/28.3
	4.00		2.80	4/17.5	4/21.0	4/24.5	6/19.1	6/22.5	6/25.8	6/32.4
	4.50		3.20	4/19.7	4/23.6	4/27.6	6/21.5	6/25.3	6/29.0	6/36.4
	5.00		3.60	4/21.9	4/26.3	4/30.6	6/23.9	6/28.1	6/32.2	6/40.5


Slab Thickness 0.25 m; q = 8.3 kN/m²									
Table Length L [m]				**2.50**	**3.00**	**3.50**	**4.00**	**4.50**	**5.00**	**6.00**
Type 4 **c**[m]/**I**[m]				0.45/1.60	0.50/2.00	0.55/2.40	0.60/2.80			
Type 6 **c**[m]/**I**[m]							0.60/1.40	0.65/1.60	0.70/1.80	0.80/2.20
Type 8 **c**[m]/**I**[m]										0.70/1.53
Table Width B [m]	2.50	Main Girder Spacing b[m]	1.60	4/13.0	4/15.6	4/18.2	4/20.8	6/16.6	6/19.1	6/24.0
	3.00		2.00	4/15.6	4/18.7	4/21.8	4/24.9	6/20.0	6/22.9	6/28.8
	3.50		2.40	4/18.2	4/21.8	4/25.4	6/19.8	6/23.3	6/26.7	6/33.6
	4.00		2.80	4/20.8	4/24.9	4/29.1	6/22.6	6/26.6	6/30.6	6/38.4
	4.50		3.20	4/23.3	4/28.0	6/22.2	6/25.5	6/30.0	6/34.4	6/43.2
	5.00		3.60	4/25.9	4/31.1	6/24.7	6/28.3	6/33.3	6/38.2	8/31.2

Slab Thickness 0.30 m; q = 9.7 kN/m²										
Table Length L [m]				**2.50**	**3.00**	**3.50**	**4.00**	**4.50**	**5.00**	**6.00**
Type 4 **c**[m]/**I**[m]				0.45/1.60	0.50/2.00	0.55/2.40	0.60/2.80			
Type 6 **c**[m]/**I**[m]						0.55/1.20	0.60/1.40	0.65/1.60	0.70/1.80	0.80/2.20
Type 8 **c**[m]/**I**[m]									0.55/1.30	0.70/1.53
Table Width B [m]	2.50	Main Girder Spacing b[m]	1.60	4/15.1	4/18.1	4/21.1	4/24.2	6/19.4	6/22.2	6/27.9
	3.00		2.00	4/18.1	4/21.7	4/25.4	6/19.8	6/23.2	6/26.7	6/33.5
	3.50		2.40	4/21.1	4/25.4	4/29.6	6/23.1	6/27.1	6/31.1	6/39.1
	4.00		2.80	4/24.2	4/29.0	6/23.0	6/26.4	6/31.0	6/35.6	8/29.1
	4.50		3.20	4/27.2	4/32.6	6/25.9	6/29.7	6/34.9	6/40.0	8/32.7
	5.00		3.60	4/30.2	4/36.2	6/28.7	6/33.0	6/38.7	8/31.2	8/36.3


Type of Table and Prop Load [kN]



Type4



Type6



Type8

Slab Table Design


Slab Table with Main Girders 2 x H20

Slab Thickness 0.35 m; q = 11.2 kN/m²										
Table Length L [m]				**2.50**	**3.00**	**3.50**	**4.00**	**4.50**	**5.00**	**6.00**
Type 4 **c**[m]/**I**[m]				0.45/1.60	0.50/2.00	0.55/2.40				
Type 6 **c**[m]/**I**[m]				0.4/0.85	0.45/1.05	0.55/1.20	0.60/1.40	0.65/1.60	0.70/1.80	0.80/2.20
Type 8 **c**[m]/**I**[m]								0.50/1.17	0.55/1.30	0.70/1.53
Table Width B [m]	2.50	Main Girder Spacing b[m]	1.60	4/17.5	4/21.0	4/24.5	6/19.1	6/22.5	6/25.8	6/32.4
	3.00		2.00	4/21.0	4/25.2	4/29.5	6/23.0	6/27.0	6/31.0	6/38.9
	3.50		2.40	4/24.5	4/29.5	6/23.4	6/26.8	6/31.5	6/36.2	6/45.4
	4.00		2.80	4/28.1	6/23.1	6/26.7	6/30.6	6/36.0	6/41.3	8/33.8
	4.50		3.20	4/31.6	6/26.0	6/30.0	6/34.4	6/40.5	8/32.6	8/38.0
	5.00		3.60	6/24.1	6/28.8	6/33.4	6/38.3	8/32.4	8/36.2	8/42.2

Slab Thickness 0.40 m; q = 12.8 kN/m²										
Table Length L [m]				**2.50**	**3.00**	**3.50**	**4.00**	**4.50**	**5.00**	**6.00**
Type 4 **c**[m]/**I**[m]				0.45/1.60	0.50/2.00	0.55/2.40				
Type 6 **c**[m]/**I**[m]				0.4/0.85	0.45/1.05	0.55/1.20	0.60/1.40	0.65/1.60	0.70/1.80	0.80/2.20
Type 8 **c**[m]/**I**[m]							0.45/1.03	0.50/1.17	0.55/1.30	0.70/1.53
Type 10 **c**[m]/**I**[m]										0.55/1.23
Table Width B [m]	2.50	Main Girder Spacing b[m]	1.60	4/20.0	4/24.0	4/28.0	6/21.8	6/25.6	6/29.4	6/37.0
	3.00		2.00	4/24.0	4/28.8	6/22.8	6/26.2	6/30.7	6/35.3	8/28.8
	3.50		2.40	4/28.0	6/23.0	6/26.6	6/30.5	6/35.9	6/41.2	8/33.7
	4.00		2.80	4/32.0	6/26.3	6/30.4	6/34.9	6/41.0	8/33.0	8/38.5
	4.50		3.20	6/24.7	6/29.6	6/34.2	6/39.2	8/33.2	8/37.1	10/35.7
	5.00		3.60	6/27.5	6/32.9	6/38.0	8/32.6	8/36.9	8/41.2	10/39.7

Slab Thickness 0.50 m; q = 15.9 kN/m²										
Table Length L [m]				**2.50**	**3.00**	**3.50**	**4.00**	**4.50**	**5.00**	**6.00**
Type 4 **c**[m]/**I**[m]				0.45/1.60	0.50/2.00					
Type 6 **c**[m]/**I**[m]				0.4/0.85	0.45/1.05	0.55/1.20	0.60/1.40	0.65/1.60	0.70/1.80	0.80/2.20
Type 8 **c**[m]/**I**[m]						0.40/0.90	0.45/1.03	0.50/1.17	0.55/1.30	0.70/1.53
Type 10 **c**[m]/**I**[m]								0.40/0.93	0.45/1.03	0.55/1.23
Table Width B [m]	2.50	Main Girder Spacing b[m]	1.60	4/24.8	4/29.8	6/23.7	6/27.1	6/31.9	6/36.6	8/29.9
	3.00		2.00	4/29.8	4/35.8	6/28.4	6/32.5	6/38.3	6/43.9	8/35.9
	3.50		2.40	6/23.9	6/28.6	6/33.1	8/38.0	8/32.1	8/35.9	10/34.6
	4.00		2.80	6/27.3	6/32.7	6/37.8	8/43.4	8/36.7	8/41.0	10/39.5
	4.50		3.20	6/30.8	6/36.8	8/31.6	8/36.4	8/41.3	10/37.1	
	5.00		3.60	6/34.2	6/40.9	8/35.1	8/40.5	10/37.1	10/41.2	

Type10



Two Main Girder HT20

Perm. M = 2 x 5 kN.m
Perm. Q = 2 x 11 kN
Perm. A = 2 x 22 kN

Load according to DIN 4421
Shoring System Class III


Dead Load	g = 0.30 kN/m²
Concrete Load	b = 26 kN/m³ x d(m)
Live Load	p = 0.20 x b kN/m²
	1.5 ≤ p ≤ 5.0 kN/m²
Total Load	q= g + b + p

Acrow European Prop Loads




•The AEP prop is designed to act as a supporting element for both Acrow horizontal formwork and all other conventional shoring applications following all safety rules and regulations.
•It is impossible for the inner and outer tube to become involuntarily disengaged to ensure a safety closure system.
•For providing a non-hand catching protection system, there is a 10 cm distance between the inner upper plate tube and the outer one when the post shore is completely retracted.
•The flexural rigid link with the table form superstructure dramatically increases the floor props load bearing capacity by 10 KN, such that:
•The permitted capacity of Acrow prop E30300/ and E30350/ becomes: 30 KN
•The permitted capacity of Acrow prop D20400/ and D20450/ becomes: 40 KN

Extension (cm)	G 300 reg. DIN	E 30/300	G 350 reg. DIN	E 30/350	G 410 reg. DIN	D 20/400 nach EN	G 490 reg. DIN	D 20/450 nach EN
150								
160								
180	35.0							
200	35.0		35.0					
220	35.0		35.0		35.0			
240	31.3		35.0		35.0			
250	28.8		33.6		35.0		35.0	
260	26.6		31.1		35.0		35.0	
280	23.0		26.8		31.4		35.0	
300	20.0		23.3		27.3		30.5	
320			20.5		24.0		28.7	
340			18.2		21.3		25.4	
350			17.1		20.1		24.3	
360					19.0		22.7	
380					17.0		20.4	
400					15.4		18.4	
420							16.7	
450							14.5	
460								
480								
named reg. EN 1065	C30	E30	C35	E35	C40	D40	C45	D45





Product name	Min. Extension mm	Max. Extension mm	Max. Load KN
Acrow Prop E30	1740	3000	30 KN
Acrow Prop E35	1990	3500	30 KN
Acrow Prop D40	2240	4000	20 KN
Acrow Prop D45	2510	4500	20 KN

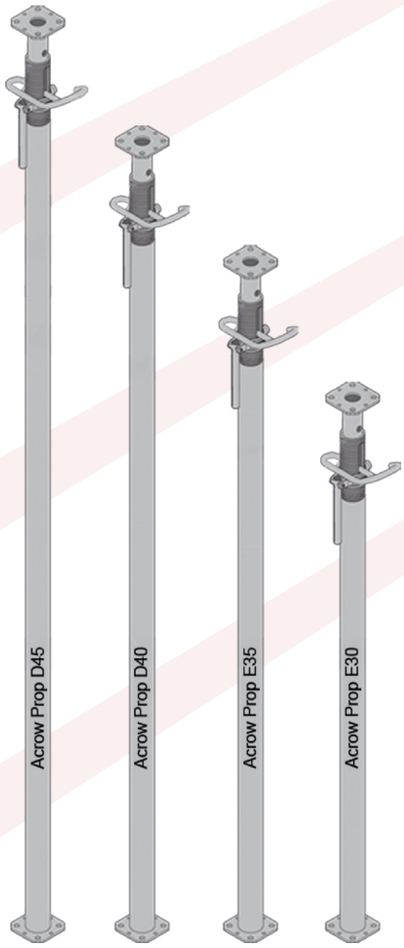



Components

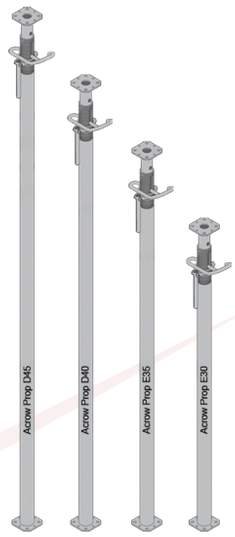
Item	Description	Code no.	Weight (kg)
	Acrow Prop E30 Acrow Prop E35 Acrow Prop D40 Acrow Prop D45	6221177013381 6221177013392 6221177013403 6221177049744	16.90 20.50 22.00 25.40
	Prop table head (single) Prop table head (double)	6221177013844 6221177013837	16.50 18.50
	Connection unit (for prop table head)	6221177028046	1.00

Components

Item	Description	Code no.	Weight (kg)
	Claw head (single) Claw head (double)	6221177013752 6221177013769	1.10 1.30
	Prop hanger (single) Prop hanger (double)	6221177013578 6221177013585	1.20 1.60
	Spring Clip for handrail Handrail l=1.20 cm	6221177010102 6221177010034	0.01 4.50
	Shifting Trolly	6221177024413	545.00

Components

Item	Description	Code no.	Weight (kg)
	Timber H20 L =2.50 m Timber H20 L =2.90 m Timber H20 L =3.30 m Timber H20 L =3.60 m Timber H20 L =3.90 m Timber H20 L =4.50 m Timber H20 L =4.90 m Timber H20 L =5.90 m	6221177024062 6221177024076 6221177024093 6221177024109 6221177024116 6221177024130 6221177024147 6221177024154	11.25 13.05 14.85 16.20 17.55 20.22 22.05 26.55
	Prop leg	6221177013776	12.00
	C Fork 3.00 m C Fork 6.00 m	6221177003876 6221177003883	905.00 1450.00

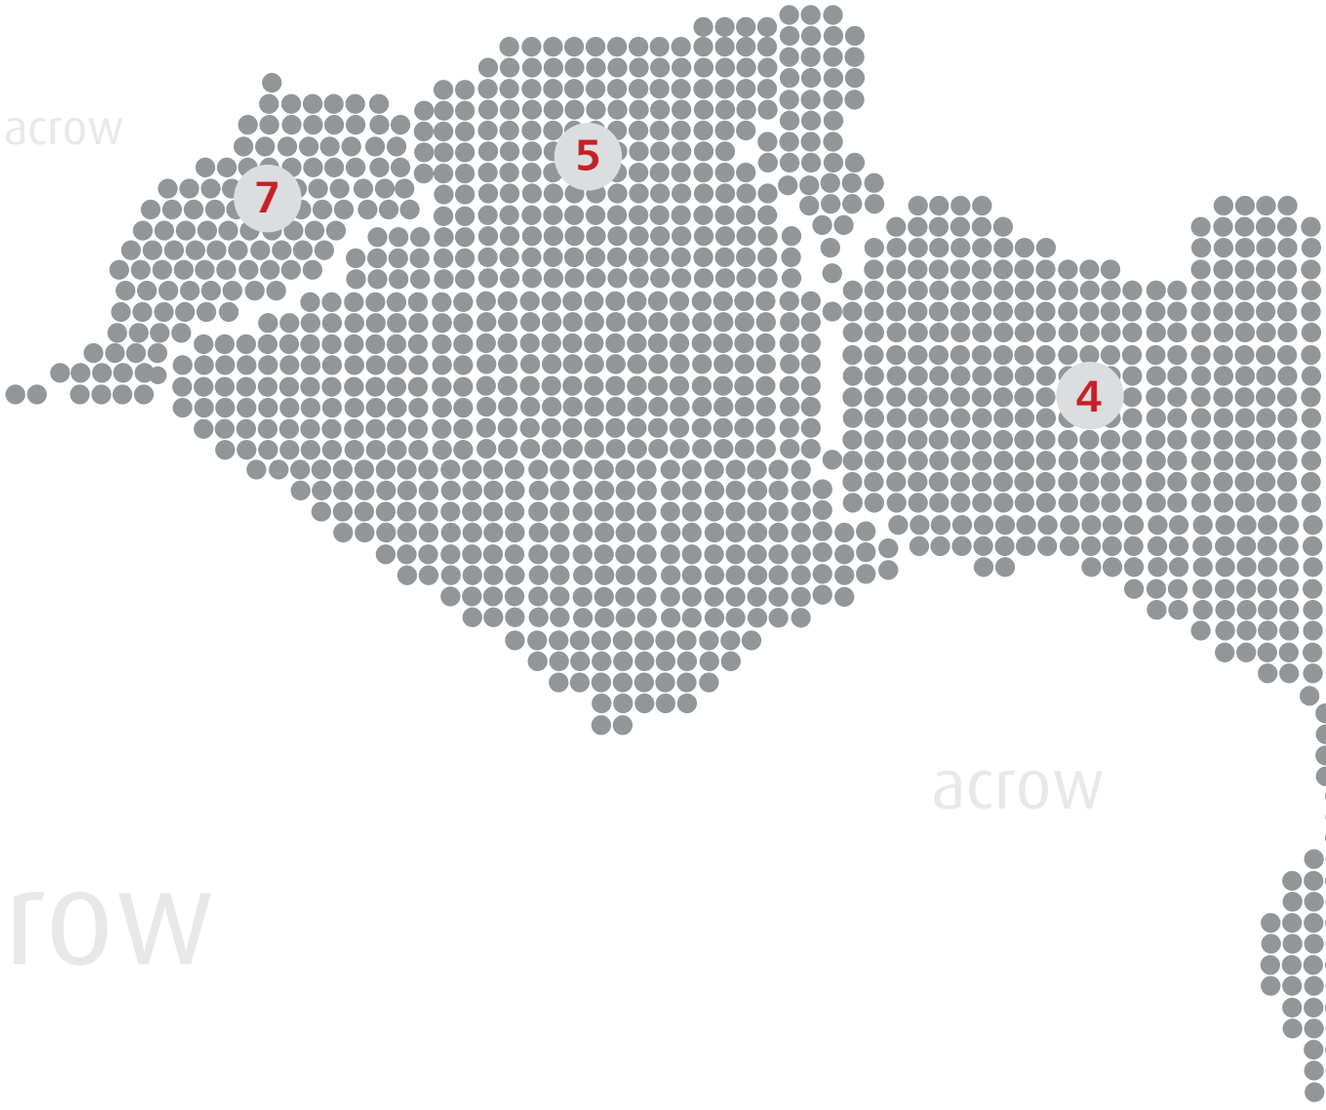

acrow
acrow
acrow
acrow
acrow
acrow

1 Egypt

Acrow Misr
Head Office, Factory:
Wady Houf, Helwan
Tel: +202 23690 616 / 23690 739
+202 23695 700 / 23699 976
Fax: +202 23695 260
E.mail: info@acrow.co

Alex Branch
27 Dr. mahmoud Daoud st.,
Tel: +203 4200 289
E.mail: acrowalex@acrow.co

Port Said Branch
El freepor Bulding
Tel: +2066 3232542
acrowportsaid@acrow.co

2 KSA

Acrow Al saudia Ltd co.
P.O.Box : 305746-Riyadh-11361
Saudi Arabia Riyadh branch:
Tel : +966 1 2160504
Fax : +966 1 2160503
Email : acrowriyadh@acrow.co

Jeddah branch:
Tel : +966 2 639 16 24
Fax :+966 2 691 85 45
Email : acrowjeddah@acrow.co


Damam branch:
Tel: +966 3 8054151

3 Kuwait

Khalid Ali, Al Kaharafi
& Bros. Co. W.LL
Tel: +965 4813 127 / 4817 289
Fax: +965 4835 501
E.mail: acrowkuwait@acrow.co

4 Libya

Acrow Tripoli
Tel: +218 91 411 6873 / 91 331 9367
Fax: +218 21 351 3838
E.mail: acrowlibya@acrow.co

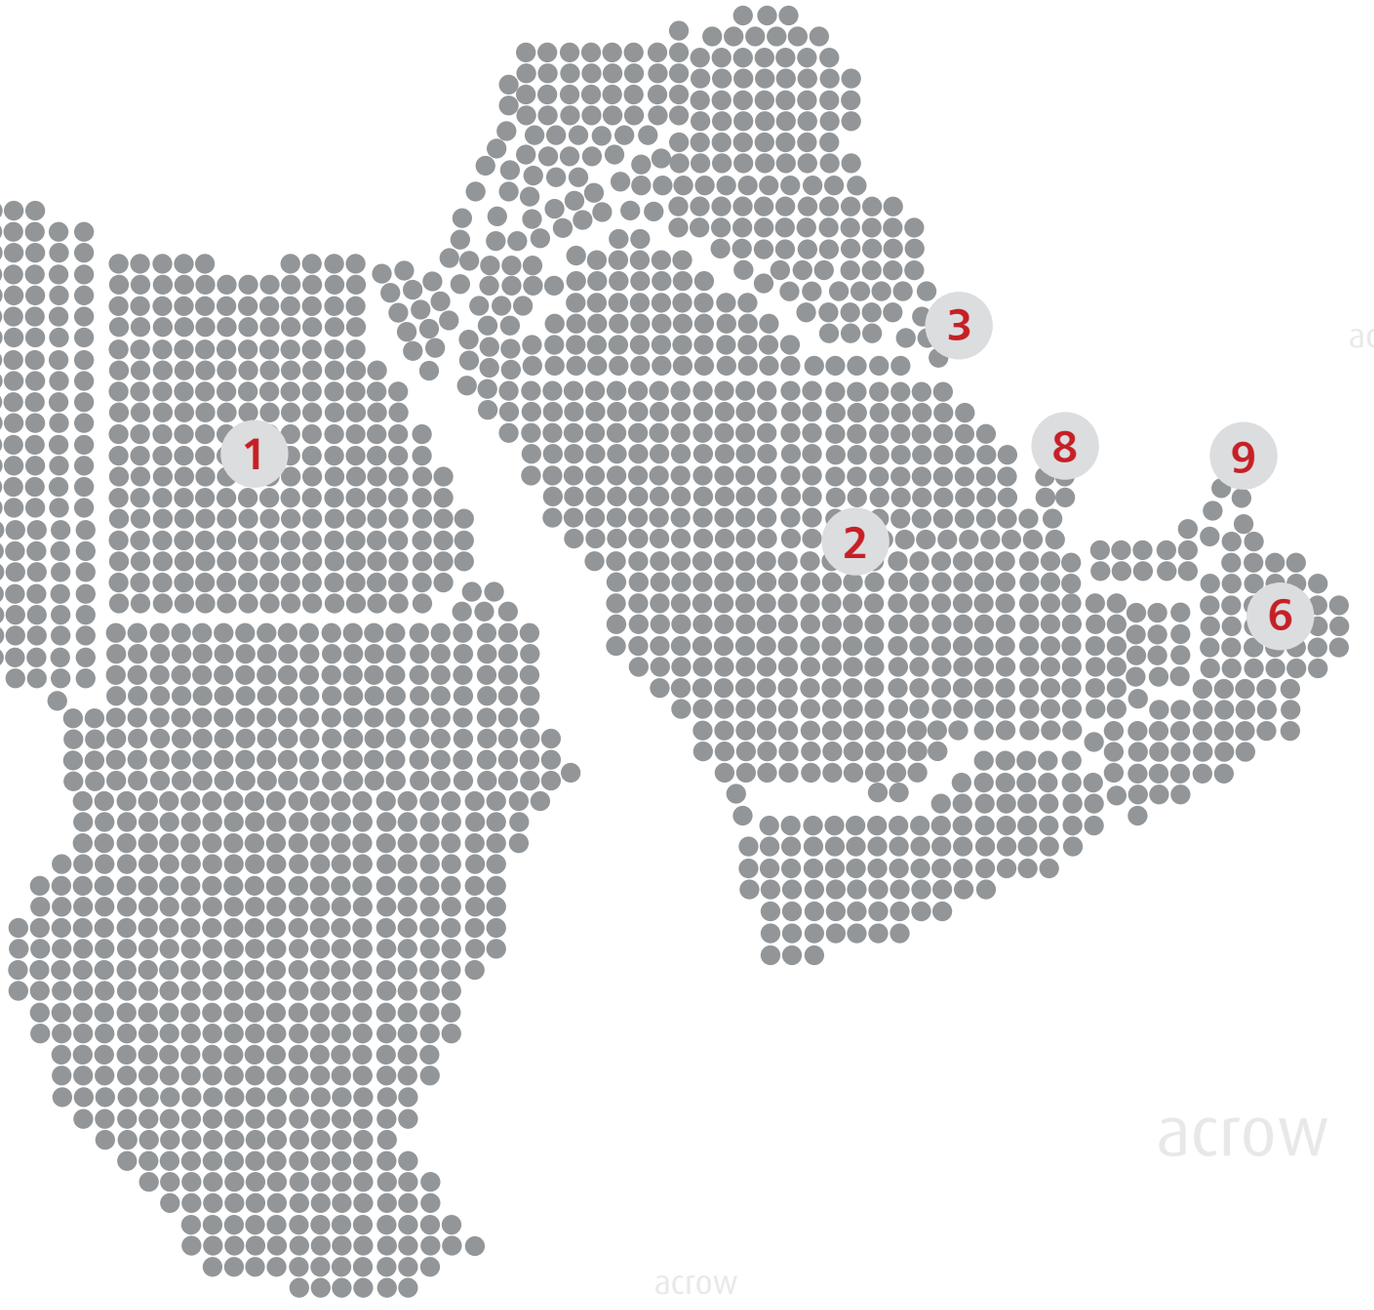

acrow
acrow
acrow
acrow
acrow

5 **Algeria**
ACROW-DZ COMPANY
Tel: +213 (0) 21 75 54 74/63/64
Tel: +213 (0) 21 50 55 58
Fax: +213 (0) 21 50 55 58
Address : Siege Social cité des travailleurs
lot. 09 groupe 02 Dar El beida, Alger
Email : acrow-dz@acrow.co

6 **Oman**
Acrow Muscat
Tel: +968 9828 76 82
E.mail: acrowmuscat@acrow.co

7 **Morocco**
38 Rue Abou El Waqt, Res
Haydar El Jarrah, Rez
Chausser No. 10
Casblanca
e-mail: acrowmorocco@acrow.co

8 **UAE**
Acrow Gulf
Tel: +971 4343 94 98
Fax: +971 4343 95 98
E.mail: acrowgulf@acrow.co

9 **Qatar**
Acrow Qatar
Tel: +974 4582 357
Fax: +974 4582 376
E.mail: acrowqatar@acrow.co

ACROW
Formwork Technology


Acrow H20 & solider


Acrow One shutter solider


Acrow V.M.C


Acrow Tech-Form


Acrow Cuplock


Acrow Bridge table form


Acrow Circular column



Acrow climbing system


Acrow shorbrace Table form


Acrow Big steel panel


Acrow European prop


Acrow Vari form


Acrow Prop table form


Acrow frame


Acrow early striking system


Acrow Ring lock

www.acrow.co

02/2013, Code No.: 2007050060248